

## Standard Recovery Diodes (Hockey PUK Version), 950A

### FEATURES

- Wide current range
- High voltage ratings up to 1500 V
- High surge current capabilities
- Diffused junction
- Hockey PUK version
- Case style DO-200AA(A-PUK), Nell's A-type Capsule
- Lead (Pb)-free

### TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications



DO-200AA(A-PUK)  
(Nell's A-type Capsule)

### PRODUCT SUMMARY

$I_{T(AV)}$	950A
-------------	------

### MAJOR RATINGS AND CHARACTERISTICS

PARAMETER	TEST CONDITIONS	VALUES	UNIT
$I_{F(AV)}$		950	A
	$T_{hs}$	55	°C
$I_{F(RMS)}$		1695	A
	$T_{hs}$	25	°C
$I_{FSM}$	50 HZ	10000	A
	60 HZ	10470	
$I^2t$	50 HZ	500	kA <sup>2</sup> s
	60 HZ	455	
$V_{RRM}$		200 to 1500	V
$T_J$	Typical	-40 to 190	°C

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ , MAXIMUM AT $T_J = T_J$ MAXIMUM mA
D950A	02	200	300	15
	04	400	500	
	08	800	900	
	10	1000	1100	
	12	1200	1300	
	15	1500	1600	

FORWARD CONDUCTION					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNIT
Maximum average forward current at heatsink temperature	$I_{F(AV)}$	180° conduction, half sine wave Double side (single side) cooled		950 (540)	A
				55 (85)	°C
Maximum RMS forward current	$I_{F(RMS)}$	25°C heatsink temperature double side cooled		1695	A
Maximum peak, one cycle non-reptitive surge current	$I_{FSM}$	t = 10ms	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	A
		t = 8.3ms			
		t = 10ms	100% $V_{RRM}$ reapplied		
		t = 8.3ms			
Maximum $I^2t$ for fusing	$I^2t$	t = 10ms	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	kA <sup>2</sup> s
		t = 8.3ms			
		t = 10ms	100% $V_{RRM}$ reapplied		
		t = 8.3ms			
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 to 10 ms, no voltage reapplied		5000	kA <sup>2</sup> √s
Maximum value of threshold voltage	$V_{F(TO)}$	$I_{PK} = 1930A, T_J = T_J$ maximum		0.80	V
Maximum value of forward slope resistance	$r_t$	$I_{PK} = 1930A, T_J = T_J$ maximum		0.34	mΩ
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 1930A, T_J = T_J$ maximum, $t_p = 10$ ms sinusoidal wave		1.45	V


THERMAL AND MECHANICAL SPECIFICATIONS					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUES	UNIT
Maximum junction operating temperature range	$T_J$			-40 to 190	°C
Maximum storage temperature range	$T_{stg}$			-40 to 200	
Maximum thermal resistance, junction to heatsink	$R_{thJ-hs}$	DC operation single side cooled		0.16	K/W
		DC operation double side cooled		0.08	
Mounting force, ±10%				4900 (500)	N (kg)
Approximate weight				70	g
Case style					DO-200AA (A-PUK), Nell's A-type Capsule

Δ R <sub>thJC</sub> CONDUCTION						
CONDUCTION ANGLE	SINUSOIDAL CONDUCTION		RECTANGULAR CONDUCTION		TEST CONDUCTIONS	UNITS
	SINGLE SIDE	DOUBLE SIDE	SINGLE SIDE	DOUBLE SIDE		
180°	0.017	0.018	0.011	0.012	$T_J = T_J$ maximum	K/W
120°	0.020	0.020	0.020	0.020		
90°	0.025	0.025	0.027	0.027		
60°	0.037	0.036	0.038	0.038		
30°	0.064	0.062	0.065	0.062		


**Note**

• The table above shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC


**Fig.1 Current ratings characteristics**

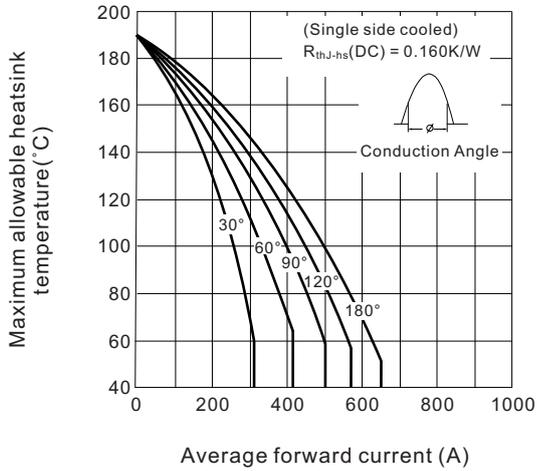


**Fig.2 Current ratings characteristics**

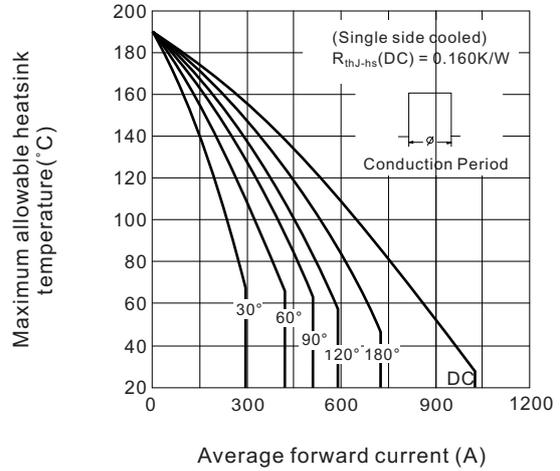


**Fig.3 Current ratings characteristics**

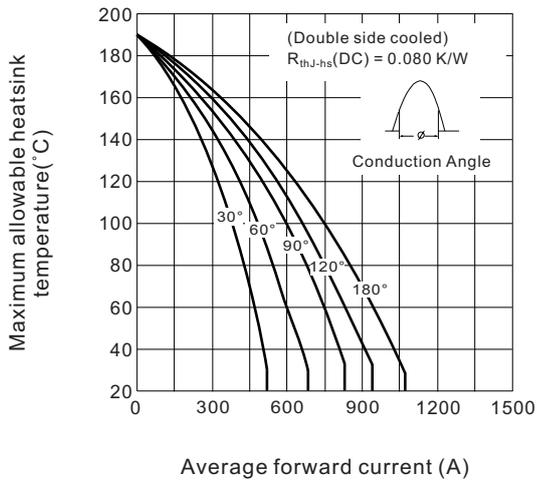


**Fig.4 Current ratings characteristics**

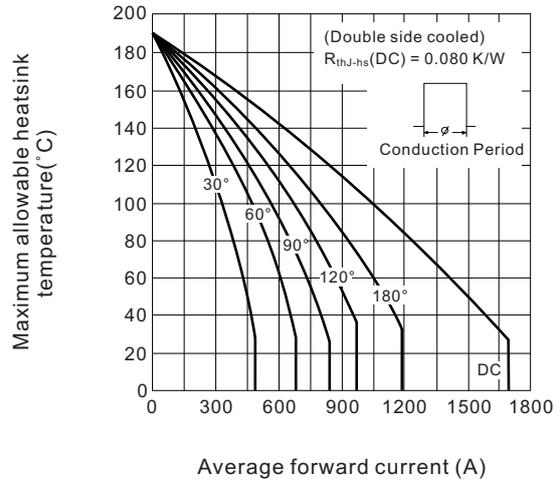


**Fig.5 Forward power loss characteristics**

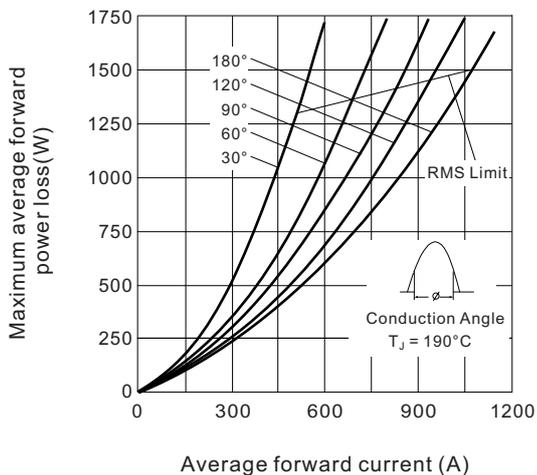


**Fig.6 Forward power loss characteristics**

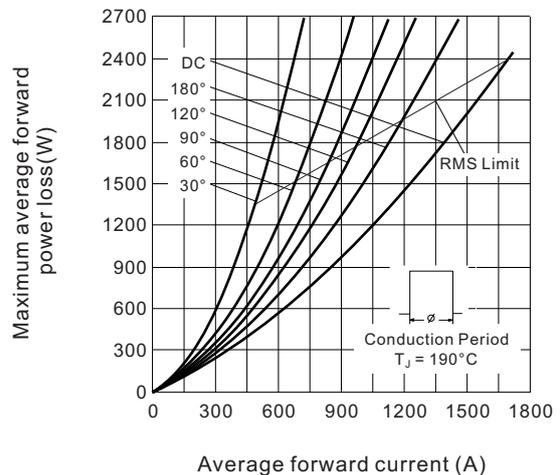


**Fig.7 Maximum non-repetitive surge current single and double side cooled**

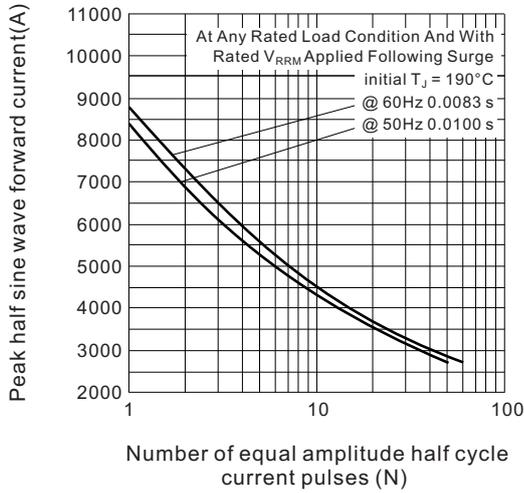


**Fig.8 Maximum non-repetitive surge current single and double side cooled**

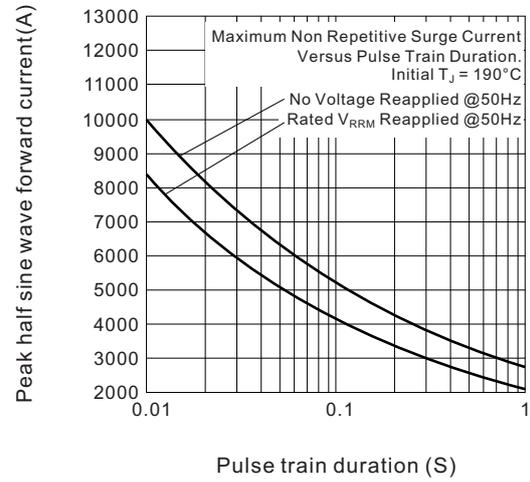

**Fig.9 Forward voltage drop characteristics**

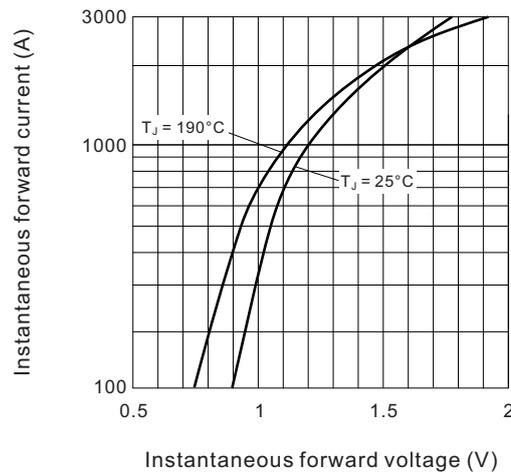

**Fig.10 Thermal Impedance  $R_{thJ-hs}$  characteristics**

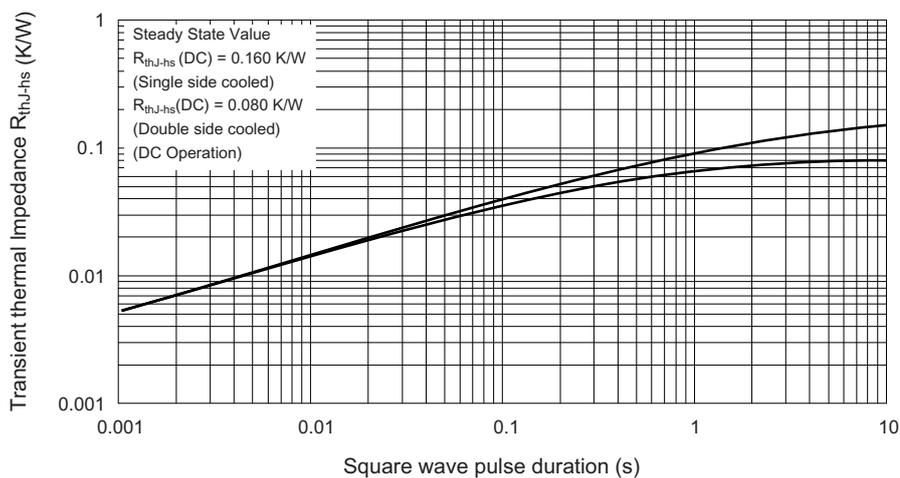


## ORDERING INFORMATION TABLE

Device code	<b>D</b>	<b>950</b>	<b>A</b>	<b>12</b>
	①	②	③	④

- ① - "D" for standard recovery diode
- ② - Maximum average forward current, "950" for 950A
- ③ - Case style : "A" for Nell's A-type Capsule, DO-200AA (A-PUK)
- ④ - Voltage code, code x 100 =  $V_{RRM}$

### DO-200AA (A-PUK), Nell's A-type Capsule

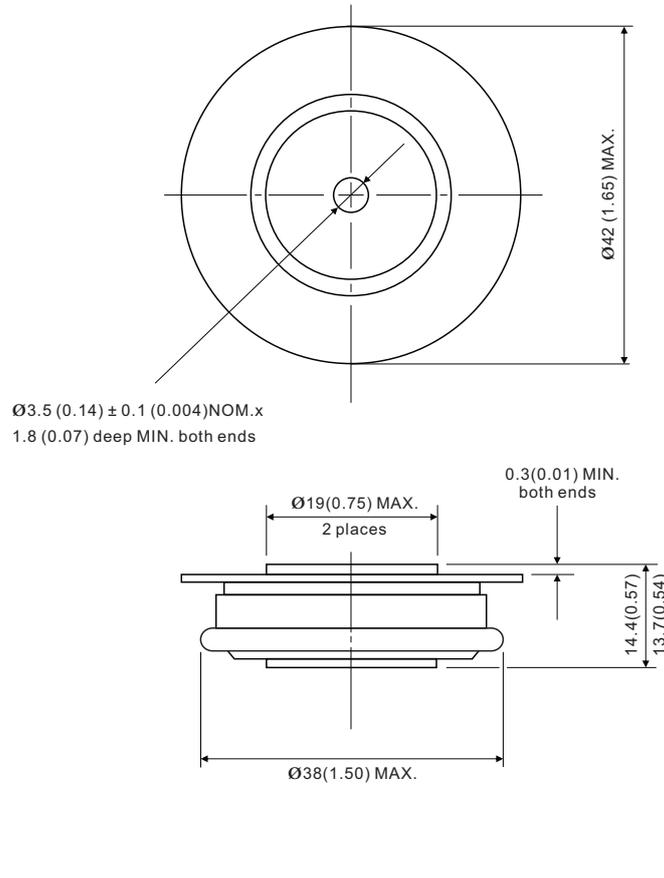

All dimensions in millimeters (inches)