

**SPECIFICATIONS**

**Mechanical**

**Mating Force:** 3.50Kg (7.71Lb) max.  
**Unmating Force:** 1.00Kg (2.20Lb) min.  
**Durability:** 1500 Cycles


**Electrical**

**Current Rating:** 1.5A  
**Contact Resistance:** 30mW max.  
**Dielectric Withstanding Voltage:** 500V AC/1min min.  
**Insulation Resistance:** 1000MW min.


**Physical**

**Housing:** Thermoplastic, UL 94V-0 rated  
**Contact and Shell:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -55 to +85

**UB Series**  
**Right Angle, T/H**  
**4 Pos.**



**DRAWING**

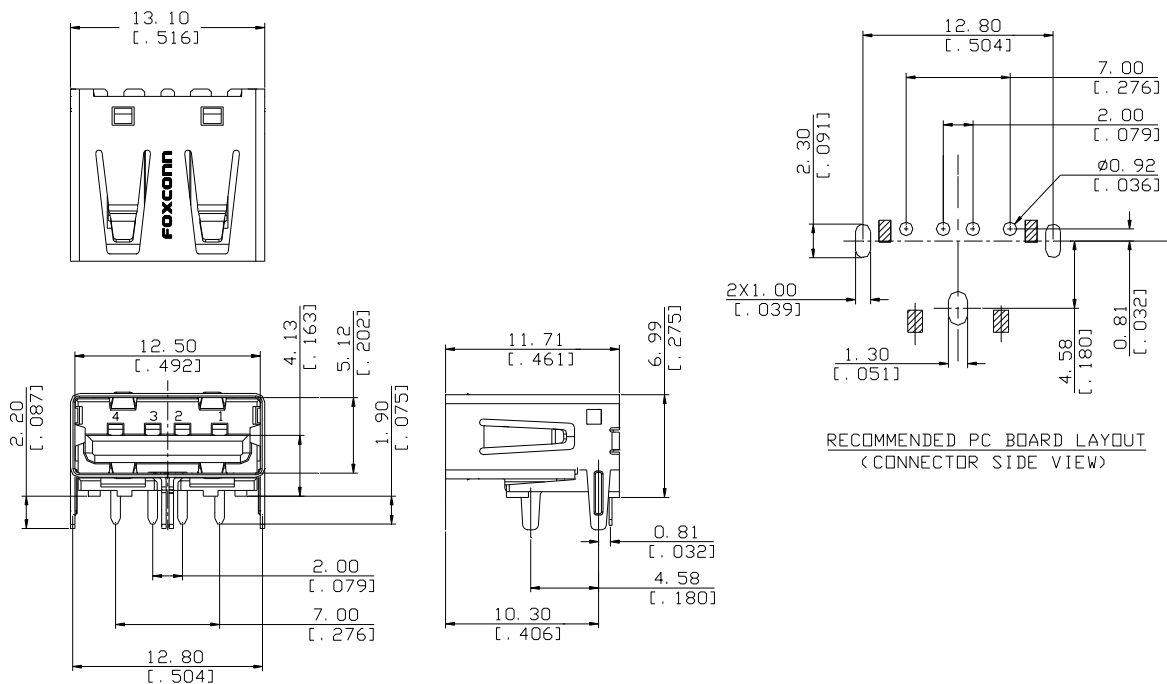

**ORDERING INFORMATION**

**PRODUCT NO.:** UB 1 1 1 2 \* - SR3- \* F

**SERIES PREFIX**  
 UB= USB A TYPE

**TERMINATION TYPE**  
 1= RIGHT ANGLE

**CONTACT DESIGN TYPE**  
 1= FEMALE

**NO. OF POS**  
 1= 4 POS

**PROFILE HEIGHT**  
 2= 4.13mm

**F=LEAD FREE**

**PACKAGE CODE**  
 4=SOFT TRAY  
 7= TAPE REEL

**MODIFICATION CODE**

**CONTACT AREA PLATED**  
 3= 30u" GOLD PLATED  
 C= 30u" Pd/Ni+GOLD FLASH

UB11123-SR3-7F	GOLD 30u" PLATED AT CONTACT AREA
UB1112C-SR3-7F	GOLD FLASH OVER Pd/Ni 30u" MIN. PLATED AT CONTACT AREA
P/N	PLATING