


HBL3521C -- Twist-Lock Plug




4P5W, 20A 250V/10A 600V AC, Non-NEMA, Black & White
Nylon

Product Specifications

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Product Type |  <p>Twist-Lock Devices</p> |
| Product Item | Plug |
| Wiring Scheme | 4 Pole, 5 Wire Grounding |
| Amperage | 20A |
| Voltage | Multi Rated |
| NEMA Configuration | Non-NEMA |
| Item Style | Insulgrip |
| Device Color | Black/White |
| Cord Dia. | .35"-1.15" (9-29) |
| Blade Holder Material | Natural White Nylon |
| Terminal Retainer Material | Clear polycarbonate |
| Housing Material | Black nylon |
| Cord Clamp Material | Natural (white) nylon |
| Blade Material | Brass |

| | |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Terminal Clamp Material | .08" (2) steel-nickel plated |
| Terminal Screw Material | #10-32 Brass (white finish on neutral screw when used) Multi-drive |
| Ground Screw Material | #10-32 Brass (green finish) Multi-drive |
| Cord Clamp Screw Material | Steel, zinc plated Multi-drive |
| Body Holding Screw Material | Steel, zinc plated Multi-drive |
| Ratings | Molded into face. |
| Catalog No. | Permanently ink marked on body. |
| Dielectric Voltage Withstand | 2,000V minimum |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30 C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of .75. |
| Cord Accommodation | Round portable service cords of diameters commensurate with the device rating as defined in UL Standard 62, CSA C22.2 No. 49. |
| Terminal Accommodation | 20A #12 AWG |
| Terminal Identification | Terminals identified in accordance with UL 498 (X, Y, Z, White, Green) |
| Flammability | HB or better per UL 94 or CSA 22.2 No. 0.6 |
| Operating Temperatures | Maximum Continuous 75 C Minimum -40 C (w/o impact) |
| Moisture Resistance | IP20 |
| Listings | UL/CSA |
| Catalog Page | Click here for catalog page B57 |
| Hubbellnet | Click here for Hubbellnet |
| Catalog Section | Click here for Section-B |
| UPC Number | 78358503991 |
| Weight in LBs | 0.3 |



TWIST-LOCK® Devices

4 Pole, 5 Wire Grounding

20 Ampere, 250 Volts, 10 Ampere, 600 Volts AC

Receptacle, INSULGRIP® Plug and Connector Body



For Replacement Use Only



Non-NEMA
20A 250V
10A 600V AC
UL/CSA



Non-NEMA
20A 250V
10A 600V AC
UL/CSA

Receptacle

| Description | Catalog Number |
|-------------------------|------------------|
| Black urea, back wired. | HBL3520 - |

Insulgrip Plug IP20 SUITABILITY

| Description | Catalog Number |
|------------------------|-------------------|
| Black and white nylon. | - HBL3521C |

Insulgrip Connector Body IP20 SUITABILITY

| Description | Catalog Number |
|------------------------|-------------------|
| Black and white nylon. | HBL3523C - |

Insulgrip Flanged Inlet


| Description | Catalog Number |
|---------------------------|-------------------|
| Nylon casing, back wired. | - HBL3525C |

Insulgrip Flanged Receptacle

| Description | Catalog Number |
|---------------------------|-------------------|
| Nylon casing, back wired. | HBL3524C - |

Notes: Cord grip range for plug and connector body .35"-1.15" (9-29).
See pages B-70 and B-71 for accessories.
For technical information on Insulgrip plug and connector body see page B-83.

CAUTION: To avoid electrical shock, review premises carefully and do not use if slot or blade configuration (design) is already in a circuit having a rating differing from the rating of this device.

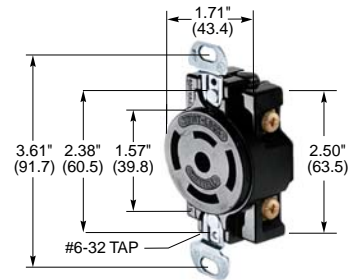


HBL3520




HBL3521C



HBL3523C



HBL3525C



HBL3524C