

POWER CONNECTOR



CCT1302-□□□□

- 01 : Horizontal
- 02 : Vertical
- 01 : Non-polarized (neutral)
- 02 : Polarized

AC Outlet (PS-2 Series)

Specifications


- Rating : 15A 125V AC
- Contact Resistance : 50mΩ max.
- Insulation Resistance : 300MΩ min. at 500V DC
- Withstanding Voltage : 2000V AC for one minute
- Operating Temperature : -20°C to +80°C
- Main Unit Material : Polyphenylene Oxide (Black) 94V-1

Approval Standards:

- UL
- CSA (02 for polarized models only)

NOTE

- Independent structure from the printed circuit board.
- Can be fixed to the chassis with two tapping screws.
- プリント基板に自立する構造です。
- シャーシには2ヶ所でタッピンねじ固定ができます。

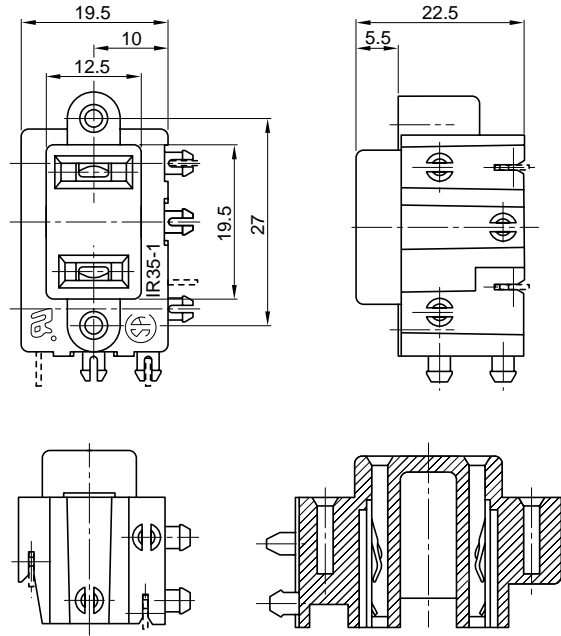

Mounting Direction	Product No.	Terminal Layout	P.C.Board Dimension (Top View)	Mounting Holes for Panel
Horizontal	01		<p>t=1.6mm</p>	<p>P. C. Board</p>
Vertical	02		<p>t=1.6mm</p>	<p>P. C. Board</p>