
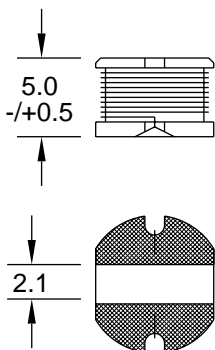



SMT Power Inductors

Special Features

- High current capacity
- Ferrite bobbin core
- Low core loss for high frequency power application
- Compact size
- Large terminal surface for good PCB bonding
- Operating temperature -30 to +100°C
- Current to cause maximum 10% of inductance drop, or 40°C temperature rise
- Tape & reel packaged 500/reel



Tol: ± 0.3
Dim: mm



Pad Layout

PM75 Series					
Part Number	L (uH) $\pm 10\%$	Test Freq.	SRF (MHz) Typ.	DCR (Ω) Max.	I, DC (A)
PM75-100K	10	2.52 MHz	28	0.07	2.30
PM75-120K	12	2.52 MHz	23	0.08	2.00
PM75-150K	15	2.52 MHz	22	0.09	1.80
PM75-180K	18	2.52 MHz	20	0.10	1.60
PM75-220K	22	2.52 MHz	17	0.11	1.50
PM75-270K	27	2.52 MHz	15	0.12	1.30
PM75-330K	33	2.52 MHz	15	0.13	1.20
PM75-390K	39	2.52 MHz	14	0.16	1.10
PM75-470K	47	2.52 MHz	13	0.18	1.10
PM75-560K	56	2.52 MHz	11	0.24	0.94
PM75-680K	68	2.52 MHz	11	0.28	0.85
PM75-820K	82	2.52 MHz	10	0.37	0.78
PM75-101K	100	1 KHz	9	0.43	0.72
PM75-121K	120	1 KHz	7	0.47	0.66
PM75-151K	150	1 KHz	6	0.64	0.58
PM75-181K	180	1 KHz	5	0.71	0.51
PM75-221K	220	1 KHz	5	0.96	0.49
PM75-271K	270	1 KHz	4	1.11	0.42
PM75-331K	330	1 KHz	4	1.26	0.40
PM75-391K	390	1 KHz	4	1.77	0.36
PM75-471K	470	1 KHz	3	1.96	0.34

J.W. Miller
MAGNETICS

306 E. Alondra Blvd., Gardena, CA 90247-1059 • (310) 515-1720 • FAX (310) 515-1962

www.jwmiller.com