

Fuseholder Open Design, Holder for MSB and 172876, THT



125 VAC/DC · 0.9 W (UL/CSA)


**Description**

- Surface Mount Device

**Standards**- UL 512  
- CSA C22.2 no. 39**Approvals**

- UL File Number: E41738


**References**[General Product Information](#)[Packaging Details](#)Fuseholder to [MSB](#); [172876](#)**Weblinks**[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#), [Product Change Notification \(PCN\)](#)**Technical Data**

Fuse-Link	2 x 7 mm
Mounting	PCB
Terminal	Solder SMT
Rated Voltage	125VAC/DC
Rated Power Acceptance IEC	0.9 W @ Ta 23 °C
Degree of Protection	IP 00
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Bronze
Unit Weight (Socket/Cap)	0.45 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	 Approvals

Soldering Methods	Reflow
Solderability	245 °C / 3sec acc. to IEC 60068-2-20, Test Td
Resistance to Soldering Heat	260 °C / 10sec acc. to IEC 60068-2-20, Test Td

**Abmessungen**

14 mm

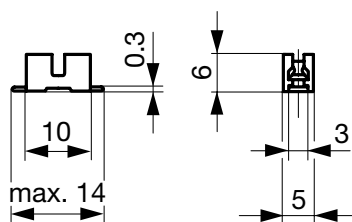

Soldering pads

**Variants**

Holder	Order Number
●	7090.9010.xx

**Packaging Unit**.xx = .03 Plastic Bag (100 pcs.)  
.xx = .55 Blister Tape (500 pcs.)