


1.SCOPE

SHOULDER's SAW filter series have broad line up products meeting all broadcast standard including NTSC,PAL and SECAM systems. These filters are composed of two interdigital transducers on a single-crystal, piezoelectrical chip. they are used in electronic equipments such as TV and so on.

2.Construction


2.1 Dimension and materials

Type : IF38A1D

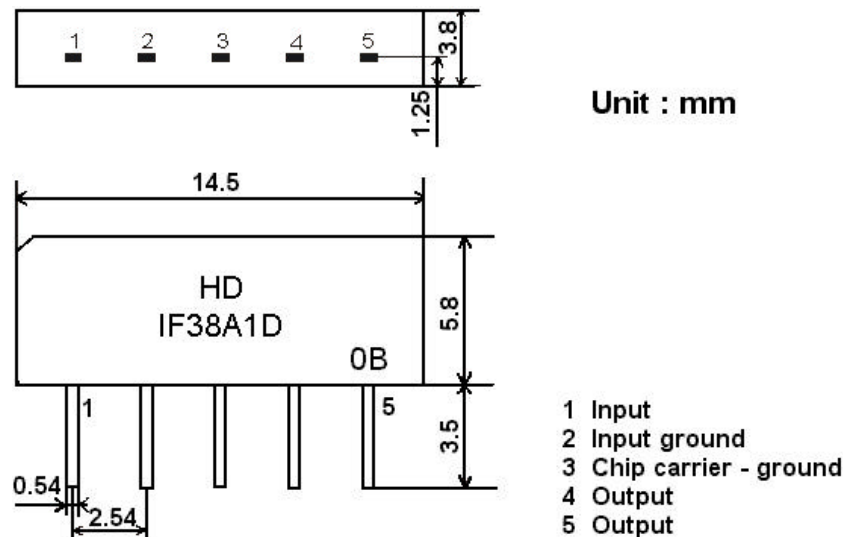

0:year(0,1,2,3,4,5,6,7,8,9)

B:product in this quarter(A:1~3,B:4~6,C:7~9,D:10~12)

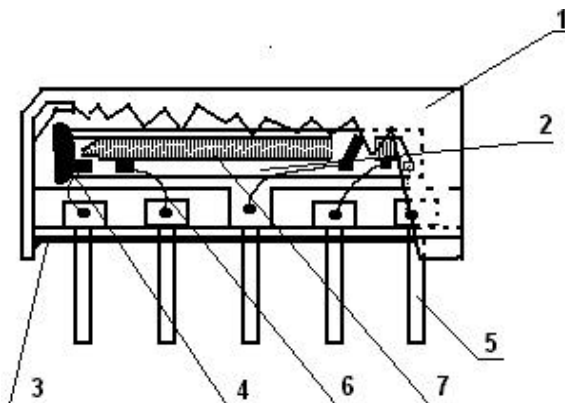

Components	Materials
1.Outer casing	PPS
2.Substrate	Lithium niobate
3.Base	Epoxy resin
4.Absorber	Epoxy resin
5.Lead	Cu alloy+Au plate
6.Bonding wire	AlSi alloy
7.Electrode	Al

2.2. Circuit construction, measurement circuit



Source impedance

 $Z_S=50\Omega$

Load impedance

 $Z_L=2k\Omega//3pF$ $T_A=25^\circ\text{C}$

	Freq	Min	typ	max	
Insertion attenuation Reference level	36.50MHz	12.5	14.5	16.5	dB
Relative attenuation	38.00MHz	4.6	6.1	7.6	dB
	34.42MHz	-0.4	1.1	2.6	dB
	33.50MHz	18.3	20.3	22.3	dB
	32.00MHz	42.0	50.0	-	dB
	39.50MHz	42.0	50.0	-	dB
Sidelobe	25.00~32.00MHz	37.0	42.0	-	dB
	39.50~45.00MHz	35.0	40.0	-	dB
Reflected wave signal suppression 1.2 us ...6.0 us after main pulse (test pulse 250 ns , carrier frequency 36.50 MHz)		40.0	50.0	-	dB
Feedthrough signal suppression 1.2 us ...6.0 us after main pulse (test pulse 250 ns , carrier frequency 36.50 MHz)		45.0	52.0	-	dB
Temperature coefficient		-72			ppm/k

3.3 Environmental Performance Characteristics


Item Test condition	Allowable change of absolute Level at center frequency(dB)
High temperature test 70°C 1000H	< 1.0
Low temperature test -40°C 1000H	< 1.0
Humidity test 40°C 90-95% 1000H	< 1.0
Thermal shock -20°C==25°C==80°C 20 cycle 30M 10M 30M	< 1.0
Solder temperature test Sold temp.260°C for 10 sec.	< 1.0
Soldering Immerse the pins melt solder at 260°C+5/-0°C for 5 sec.	More then 95% of total area of the pins should be covered with solder

3.4 Mechanical Test


Item Test condition	Allowable change of absolute Level at center frequency(dB)
Vibration test 600-3300rpm amplitude 1.5mm 3 directions 2 H each	<1.0
Drop test	<1.0

On maple plate from 1 m high 3 times	
Lead pull test Pull with 1 kg force for 30 seconds	<1.0
Lead bend test 90° bending with 500g weigh 2 times	<1.0


3.5 Voltage Discharge Test

Item Test condition	Allowable change of absolute Level at center frequency(dB)
Surge test Between any two electrode 	<1.0

3.6 Frequency response

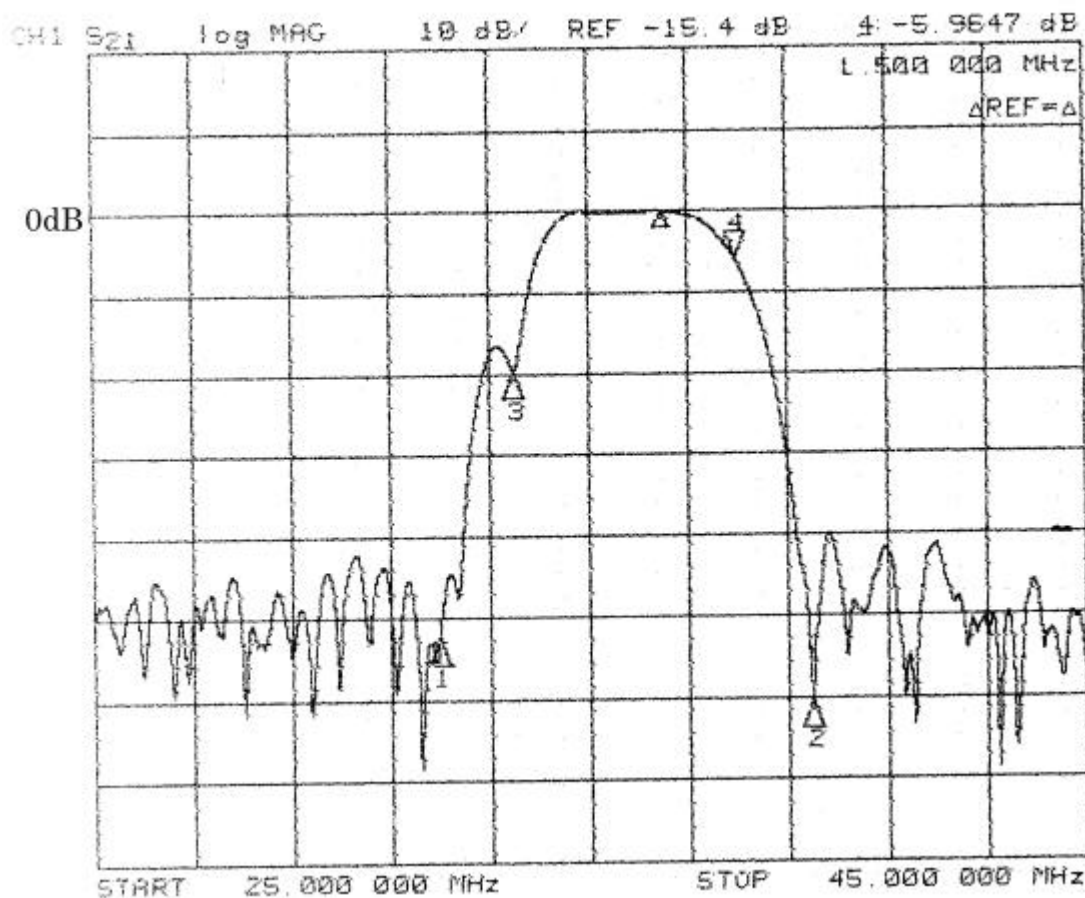


CH1 S21 delay 30 ns/ REF 1.196 ps 2 12.758 ns
 CH2 S21 log MAG 1 dB/ REF -15.42 dB 3: -5.9606 dB

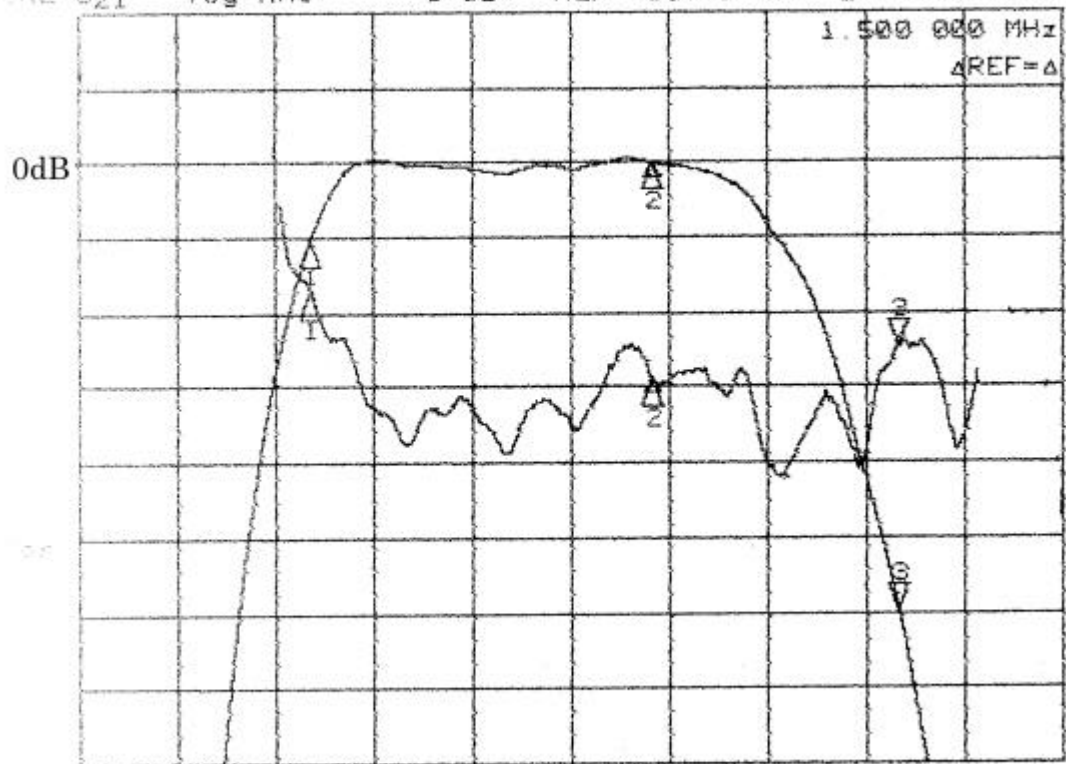

START 33.000 000 MHz STOP 39.000 000 MHz

CH1 S21 log MAG 10 dB/ REF -15.4 dB

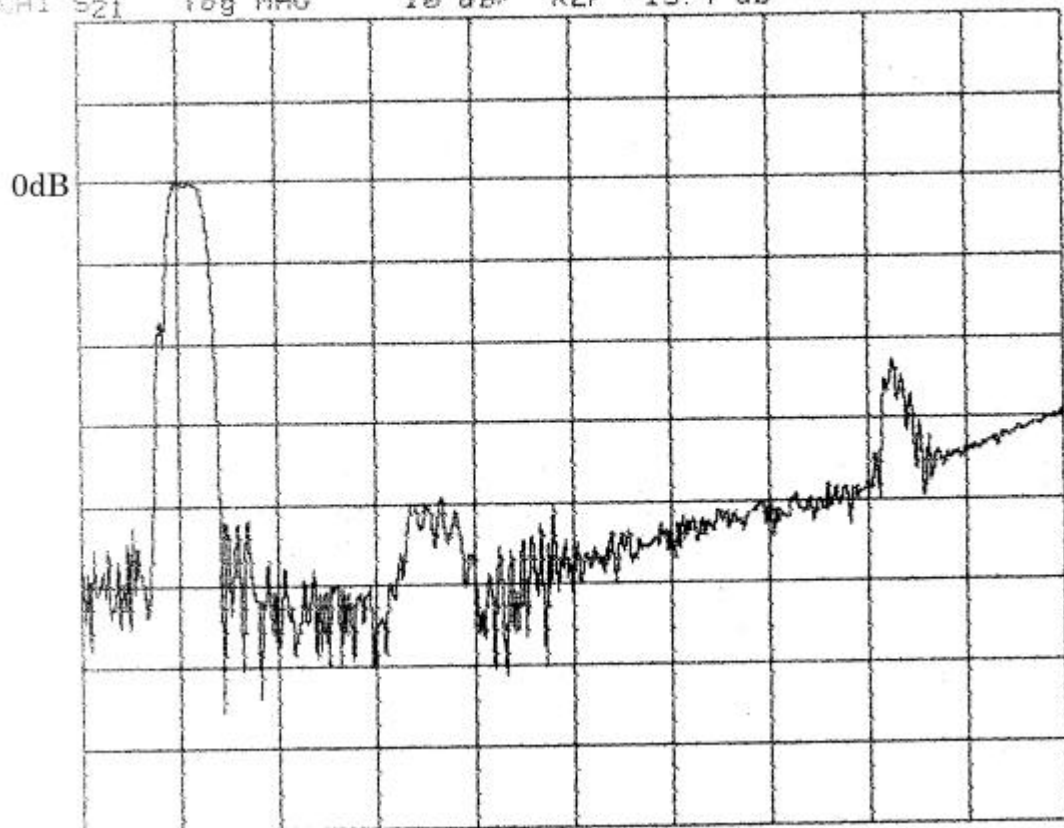

START 25.000 000 MHz STOP 125.000 000 MHz

Time domain response:

