


TYPE YAK-A-2G

STACKING HYLUG™

For Aluminum

Cast aluminum HYLUG™ with a special tongue configuration for stacking of conductors on two and four hole NEMA transformer or equipment terminal pads. Up to eight conductors may be stacked on one four hole NEMA pad. HYLUG™ is pre-filled with PENETROX™ joint compound and capped.

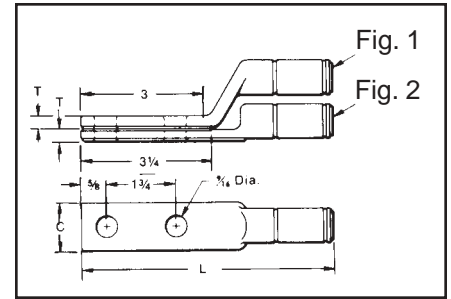

CATALOG NUMBER	FIG. NO.	CONDUCTOR	C	L	T	DIE INDEX	TOOLS, DIE SET CATALOG NO., & (NO. OF CRIMPS)			
							MD7, MD6 SERIES	Y35, Y750	Y45	Y46
YAK2CA2G1	1	2 Str.	7/8	5-5/8	1/4	BG	BG (3)	U-BG (1)	†	‡
YAK2CA2G2	2					W-BG (1)		†	‡	
YAK25A-2G1	1	1/0 Str.				K 5/8		UK 581T (3)	†	‡
YAK25A-2G2	2					243	U243 (1)	†	‡	
YAK28A-2G1	1	4/0 Str.**	1-1/8	6-1/4	5/16	249	W249*	U249*	†	‡
YAK28A-2G2	2					K840	W-K840*	†	‡	
YAK29A-2G1	1	250		6-7/8	3/8	299		U299*	†	‡
YAK29A-2G2	2					705	U705	†	‡	
YAK31A-2G1	1	350		7-3/4	7/16	317		U317*	†	‡
YAK31A-2G2	2						705	U705*	†	‡
YAK311A-2G1	1	397.5		7-3/4	7/16	317		U317*	†	‡
YAK311A-2G2	2						705	U705*	†	‡
YAK34A-2G1	1	500	1-5/8	8-1/4	5/8	608		U608*	†	‡
YAK34A-2G2	2						786	U786*	S786*	P786*
YAK361A-2G1	1	600		8-1/4	5/8	722		U786*	S722*	P722*
YAK361A-2G2	2						786	U786*	S722*	P722*
YAK39A-2G1	1	700		8-1/4	5/8	722		U786*	S722*	P722*
YAK39A-2G2	2						750	U786*	S722*	P722*
YAK44A-2NG8	1	1000		8-7/8		302		S44ART*		P44ART*
YAK44A-2NG7	2									

E-87

* Overlap crimps.
 ** Accommodates 4/0 Str., Al. or Cu.
 † U Die with adapter PT-6515.
 ‡ U Die with adapter PUADP-1.