


RoHS

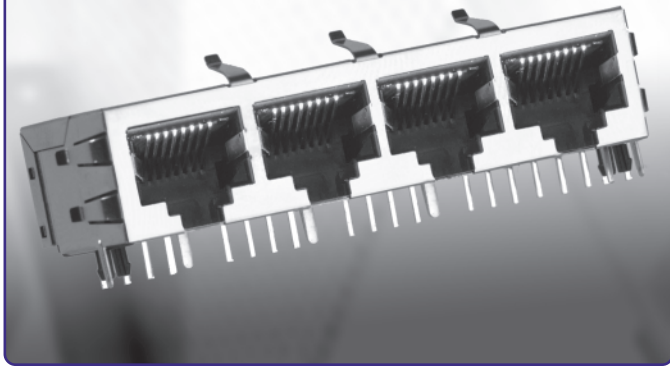

## GSGX Series Right Angle Gang Jack

Features 

- Available in up to 8 Ports
- Available Fully Shielded for Category 5 Applications
- Standard and Reflow Compatible Through Hole Designs Available
- CSA/NRTL Certified File No. LR78160

## Performance Specifications Materials and Finish

### Housing Material

PBT Thermoplastic, Glass Filled, UL94V-0 Rated, Black Color

### Shield

Copper Alloy, Nickel Plated

### Contact Material

Phosphor Bronze

## Electrical Characteristics

### Insulation Resistance

500 Megohms Min

### Dielectric Withstanding Voltage

1000V AC for 1 Minute

### Contact Resistance

20 Milliohms Max

### Current Rating

1.5 Amps


## MODULAR JACKS AND PLUGS

### GSGX Series

#### Documentation & Ordering Information


Kycon Part #

#### Part Number Builder

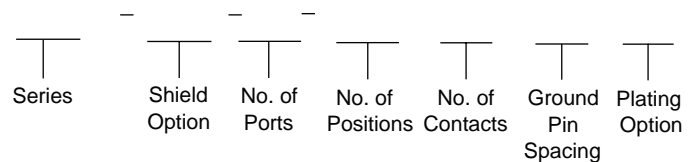

#### Series

GSGX - Right Angle Gang Jack P.C.B. Mount

#### Ground Pin Spacing

Blank - No ground pin spacing

3.68mm - 3.68mm ground pin spacing

4.57mm - 4.57mm ground pin spacing

#### No. of Port and Shield Options

No. of Port	N Non-Shielded			NS Shielded			NS2 Shielded w/Top Only ground Tabs			NS7 Shielded w/Top & Side ground Tabs			NSX		
	Blank	3.68 mm	4.57 mm	Blank	3.68 mm	4.57 mm	Blank	3.68 mm	4.57 mm	Blank	3.68 mm	4.57 mm	Blank	3.68 mm	4.57 mm
2	-	-	-	-	-	-	-	-	-	-	*	-	-	-	-
4	-	-	-	-	-	-	-	-	-	*	-	-	-	-	**
5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	-	-	-	-	-	-	-	-	-	-	**	-	-
8	-	-	-	-	*	-	-	-	-	-	-	-	-	-	-
10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

\* Not available with 50µ" Gold Plating

\*\* Available only as 50µ" Gold Plating

#### Plating Option

Blank - Standard

50 - 50µ" Gold Plating