



CIRCUIT LAYOUT

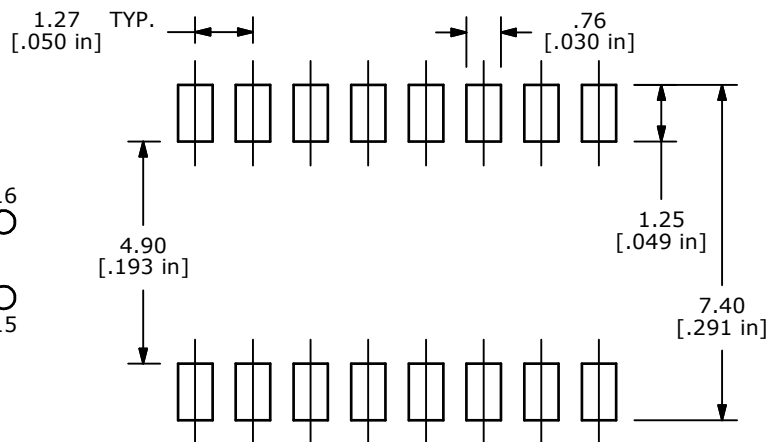


PC LAYOUT

ALL 8 POLES SET TO "OFF" POSITION

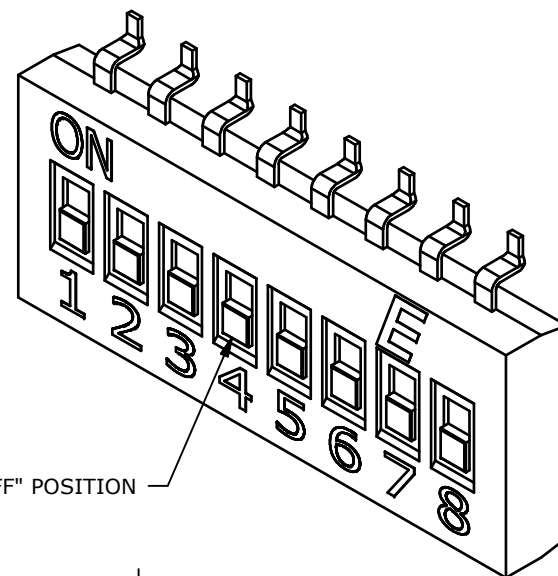

NOTE:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲4. OPERATING FORCE: 500±100 gf
5. TRAVEL: 0.6±0.25 mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C TO 85°C
- ▲12. PACKAGING: 4,000 PCS PER REEL
- ▲13. ALL 8 POLES SET TO "OFF" POSITION.
14. ▲DENOTES CRITICAL PARAMETER.
15. 2002/95/EC (ROHS) COMPLIANT.

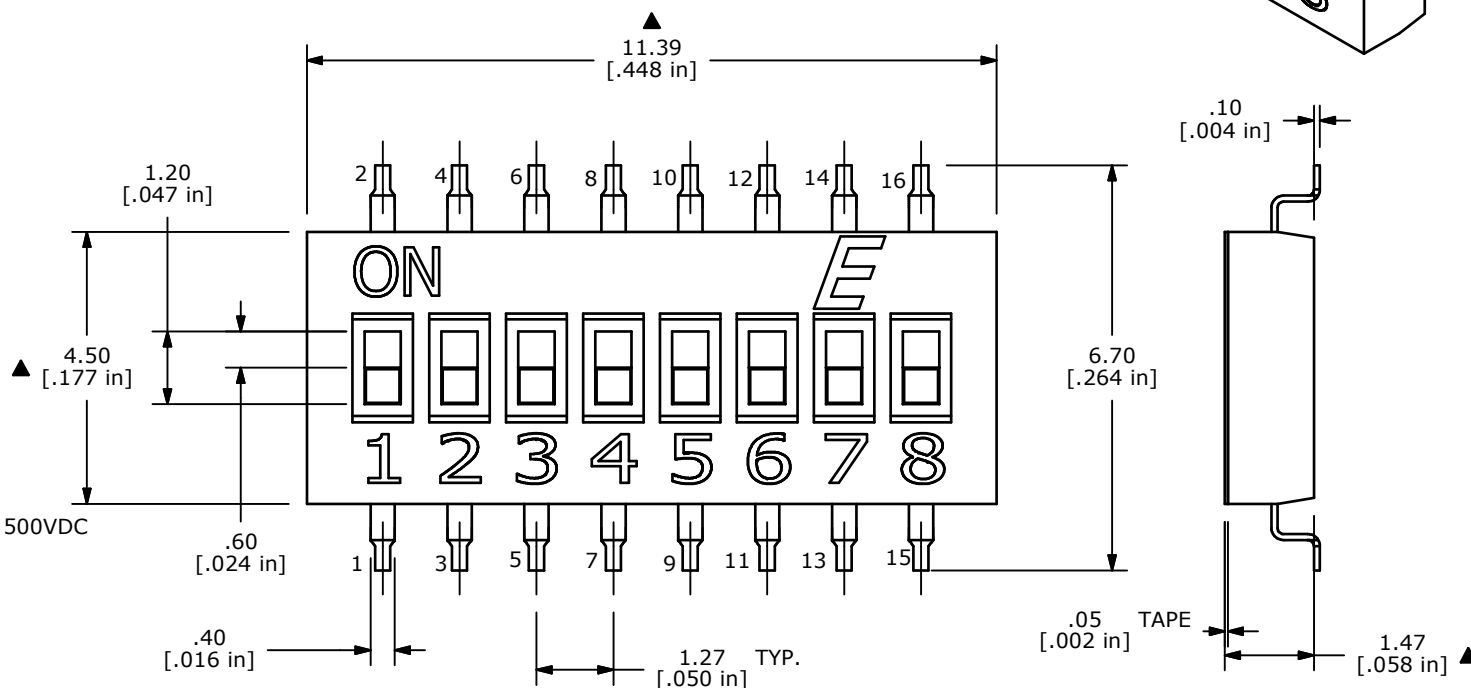

E-SWITCH®

TITLE KAN1108RR-OFF

A	20892	RELEASED FOR PRODUCTION	11/27/12	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE 11/27/2012	DR EBP	DWG N111195	REV A
-------	--------------------	-----------	----------------	----------