

FEATURES

- 5 x 3.2mm SMD package with AT-Cut crystal for high stability
- Frequency 32.768kHz for real time clock applications
- Tristate (Enable/Disable) function as standard
- Supply voltage 3.3V, 2.5V or 1.8 Volts



DESCRIPTION

XOA53 miniature oscillators consist of a TTL/CMOS-compatible hybrid circuit together with a miniature AT-Cut quartz crystal packaged in a low-profile, industry-standard ceramic package. The AT-Cut crystal provides high frequency stability but with a low μA current consumption, usually only available with a X-Cut crystal.

SUPPLY VOLTAGE DEPENDANT SPECIFICATION


Supply Voltage (Vdd)	+1.8VDC	+2.5VDC	+3.3VDC
Current Consumption (32.768kHz, 15pF load)	65 μA typ., 80 μA max.	70 μA typ., 90 μA max.	75 μA typ., 100 μA max.
Output Logic HIGH (VOH; IOH= -1.0mA)	1.62 V min.	2.25V min.	2.97V min.
Output Logic LOW (VOL; IOL= -1.0mA)	0.18V max.	0.25V max.	0.33V max.
Rise Time/Fall Time	5.0ns typ., 10ns max.	4.0ns typ., 10ns max.	3.0ns typ., 10ns max.

GENERAL SPECIFICATION


Frequency:	from 10kHz to 100kHz
Supply Voltage:	1.8V or 2.5V \pm 10% or 3.3 Volts \pm 10%
Output Logic:	HCMOS/LSTTL
Frequency Stability:	\pm 25ppm, \pm 50ppm or \pm 100ppm over Operating Temp. Range
Operating Temp. Range:	-10 to +70°C (Commercial) -40 to +85°C (Industrial)
Supply V. vs. Freq. Stability:	\pm 1 ppm max.
Output Load :	15pF
Duty Cycle:	50% \pm 3% typical, 50% \pm 5% max.
Storage Temperature:	-55° to +125°C
Startup Time:	0.8ms typical 5.0ms max.
Ageing:	\pm 3ppm max. per year
Tristate Function (Pad 1):	Output (Pad 3) is active if Pad 1 is not connected or a voltage to Pad 1 is 'HIGH'. Output is high impedance when 'LOW' or GROUND is applied to Pad 1.
Enable/Disable Time:	Enable: 1ms max., Disab: 0.1 μs max.

Note: Parameters are measured at ambient temperature of 25°C, supply voltage as stated and a load of 15pF

OUTLINE & DIMENSIONS

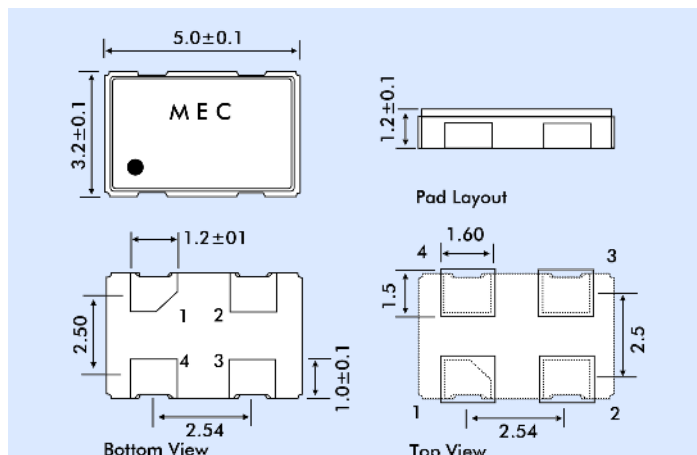

PART NUMBERING

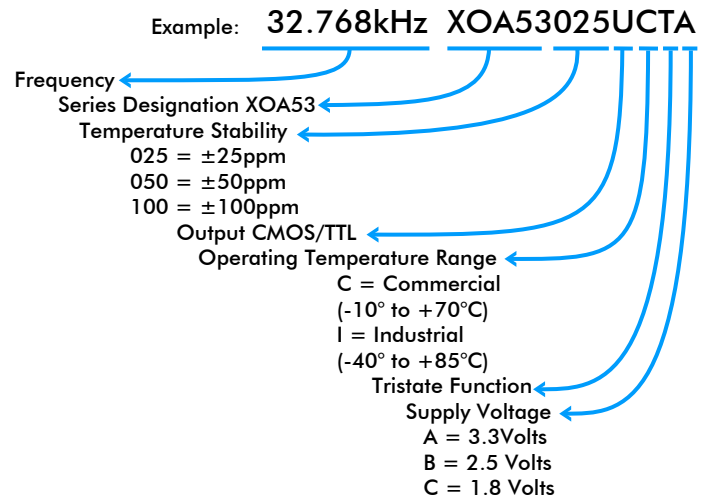

Pad Connections:

1. High Enable
2. Ground
3. Output
4. Supply Voltage