

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


DESCRIPTION

The KS05LL4 is a transient voltage suppressors (TVS) which provide a very high level protection for sensitive electronic components that may be subjected to electrostatic discharge (ESD). It is designed to replace multi-layer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

The KS05LL4 was past ESD transient voltage up to $\pm 8\text{KV}$ (contact) according to IEC61000-4-2 and withstand peak current up to 3A for 8/20 μs pulse according to IEC61000-4-5.

The KS05LL4 is available in SOT-553 package. Standard products are Pb-free and Halogen-free.

SOT-553

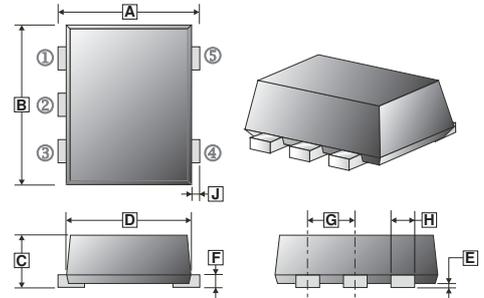

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.20	1.70	F	0.09	0.16
B	1.50	1.70	G	0.45	0.55
C	0.525	0.60	H	0.17	0.27
D	1.10	1.30	J	0.10	0.30
E	-	0.05			

APPLICATIONS

- TVs, monitors, audio
- Portable devices
- Notebooks, mother boards, graphic cards and ports.
- Set-top box and game consoles.


FEATURES

- Working voltage: 5V
- Peak power ($t_p=8/20\mu\text{s}$): 36W
- ESD protection--
IEC61000-4-2 (Contact): $\pm 8\text{KV}$
IEC61000-4-2 (Air): $\pm 15\text{KV}$
- Low leakage current
- Small package

MARKING



(Top view)

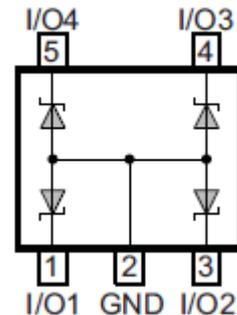

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-553	3K	7 inch


ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Rating		Symbol	Value	Unit
IEC 61000-4-2 (ESD)	Air contact	V_{ESD}	± 15	kV
	Contact discharge		± 8	
Peak pulse power ($t_p=8/20\mu\text{s}$)		P_{PK}	36	W
Peak pulse current ($t_p=8/20\mu\text{s}$)		I_{PP}	3	A
Operation & Storage temperature range		T_J, T_{STG}	150, -55 ~ 150	$^{\circ}\text{C}$
Lead temperature		T_L	260	$^{\circ}\text{C}$


ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Reverse Working Voltage	V_{RWM}	$I_R=1\mu\text{A}$	-	-	5	V
Reverse Leakage Current	I_R	$V_{RWM}=5\text{V}$	-	-	1	μA
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	6.2	6.8	7.5	V
Forward Voltage	V_F	$I_F=10\text{mA}$	0.4	0.8	1.2	V
Clamping Voltage	V_{Clamp}	$I_{PP}=1\text{A}, t_p=8/20\mu\text{s}$	-	-	9	V
		$I_{PP}=3\text{A}, t_p=8/20\mu\text{s}$	-	-	12	
Junction capacitance	C_J	I/O-to-GND $V_R=0, f=1\text{MHz}$	-	16	20	pF
		I/O-to-I/O $V_R=0, f=1\text{MHz}$	-	8	10	pF

RATINGS AND CHARACTERISTICS CURVES

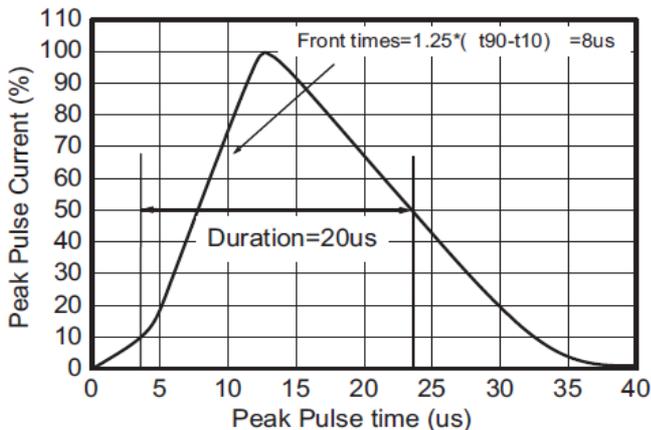

8/20us waveform

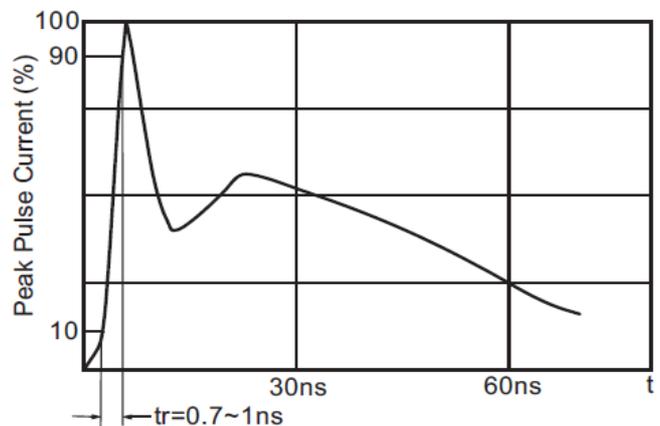

IEC61000-4-2 waveform

RATINGS AND CHARACTERISTICS CURVES

