

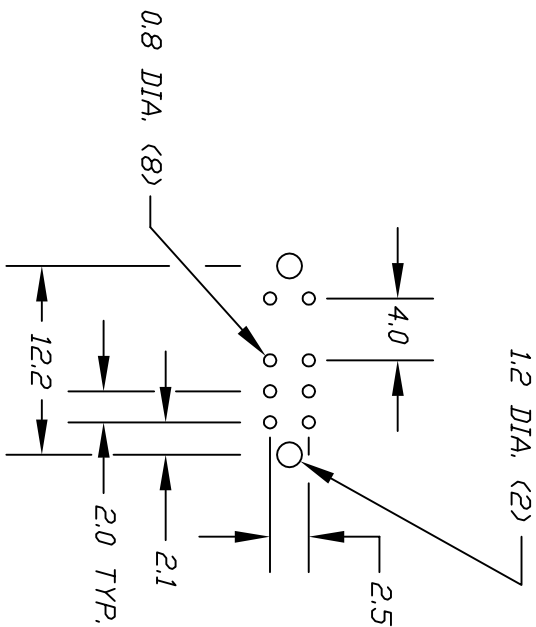
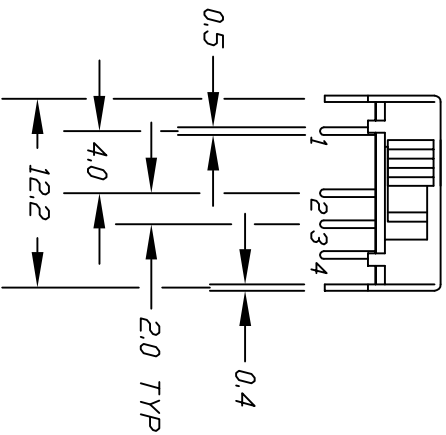
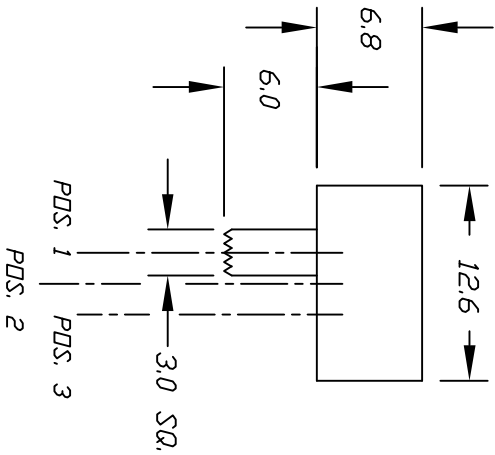




RECOMMEND P.C.B. HOLES

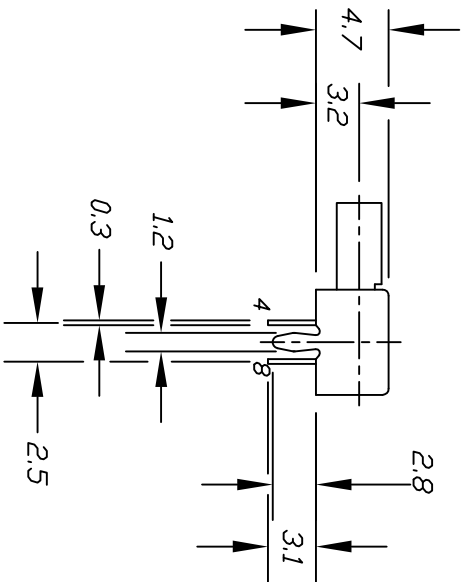

CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
2-1	2-3	2-4	
6-5	6-7	6-8	

- NOTES:
1. ALL DIMENSIONS IN MM
 2. TERM. NOS. FOR REF ONLY
 3. RATING: DC 30V, 0.2A
 4. TRAVEL: 2.0mm
 5. TIMING: NON-SPECIFIED
 6. 2002/95/EC (ROHS) COMPLIANT

B. E002730/EC (KUNHS) COMPLIANT													
B	ADD TIMING NOTE			1/20/09		BLR							
A	RELEASED FOR PRODUCTION												
REV.	DESCRIPTION			DATE		CHKD							
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED													
TOLERANCES													
0.0				±0.4									
0.00				±0.25									
 E-SWITCH										TITLE			
										EG 2315A			
SCALE		DATE		DR		DWG		REV					
2:1		1/20/09		BLR		P040241		B					