

**Main applications:**

Type CBB65V Capacitors are used in motor run, HVAC/R, UPS and other general purpose applications, are designed for continuous operation and are energized the entire time the motor is running.

Advantages:

- Low DF (dissipation factor)
- Protected with a pressure-sensitive interrupter
- Small size and light weight
- Special high temperature 100C versions available
- High insulation resistance
- UL-810 fault current protection
- Made to EIA-456-A standards
- RoHS compliant

Specifications:

Capacitance Range: 0.5uF to 100uF

Capacitance Tolerance: +/-10% standard; +/-3% to +/-6% optional

AC Voltage Range: 150VAC to 600VAC

Voltage Testing:

T-T (terminal to terminal): $2.0U_n$ (rated voltage)/2S

T-C (terminal to case): 2200VAC/2S

Frequency: 50/60Hz

DF (dissipation factor): shall not be greater than 0.1% at 60Hz

Temperature Range: -40C to +80C standard; +90C or +100C optional

Approval Certification: UL, cUL, CE, VDE, TUV, CQC

Construction characters:

MPP film: The capacitors' windings are manufactured with MPP film which is metalized with a thin self-healing mixture of zinc and aluminum directly on one side of the polypropylene film under vacuum.

Windings: Type CBB65V capacitor's winding can be cylinder or elliptic cylinder. The advantage of elliptic cylinder winding is to make the capacitor's oval size smaller and weight lower.


Metal spraying: The ends of the capacitor windings are sprayed with metal powder which facilitating a high current load and ensuring a low-inductance connection between the terminals and windings.

Oil-filled: The capacitors are filled with environmental friendly vegetable oil which protects metalized polypropylene film from corrosion, helps optimum heat transfer, and is good to decrease the degrading effects of corona (which may make premature failures).

Lead material: It's always 2+2 tabs AMP250 quick disconnecting terminals (for easy assembly), also available with 4+4 tabs.

Pressure-sensitive interrupter: Type CBB65V capacitors have a pressure-sensitive interrupter approved by UL to remove the capacitors from the electric circuit at end of life. When over-voltage or ageing happens at the end of the capacitor's life, an increasing number of self-healing breakdowns may cause the capacitor's inner pressure rising. To prevent them from bursting, the pressure-sensitive interrupter which is based on an attenuated spot at one of the connecting wires inside the capacitor will operate. With rising pressure the metal case begins to expand, mainly by opening the folded crimp and pushing the cover upwards. As the result, the prepared connecting wire is separated at the attenuated spot, and the current path is interrupted irreversibly.

(Below diagram shows the operation)

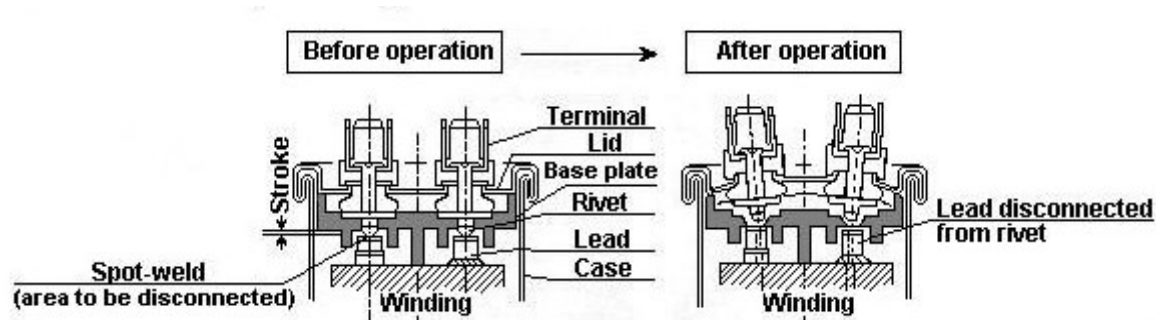

Knowledge points:

"Self-healing": CBB65V is a kind of self-healing capacitor. In the event of a voltage breakdown in the dielectric the metal layers around the breakdown channel are evaporated by the temperature of the electric arc that forms between the electrodes. They are removed within a few microseconds and pushed apart by the overpressure generated in the center of the breakdown spot. An insulation area is formed which is reliably resistive and voltage proof for all operating requirements of the capacitor. The capacitor remains fully functional during and after the breakdown.



Vacuum and heat treatment: The capacitors are processed with vacuum oil-filling and heat treatment which ensures thorough removal of moisture, resulting in superior capacitance stability and long term reliability.

Service life: In accordance with applicable standards (such as IEC 60252-1-2010), capacitor's service life is classified in some grades (see the right chart).

Application Class	Service Life
A	30,000h
B	10,000h
C	3,000h
D	1,000h

Capacitance's tolerance under different temp.: The capacitance of all capacitors should be within the specified tolerance limits of the nominal rating when measured at temperature of +25C. When measured at the operating case temperature limits, the capacitance of the capacitors will not change by more than -5% to +2% of the +25C capacitance value. Capacitance measurements shall be made on an AC bridge at a frequency of 60Hz.

Main factors influencing capacitor's life: The service life of a capacitor will be shortened by exceeding the voltage and temperature rating.

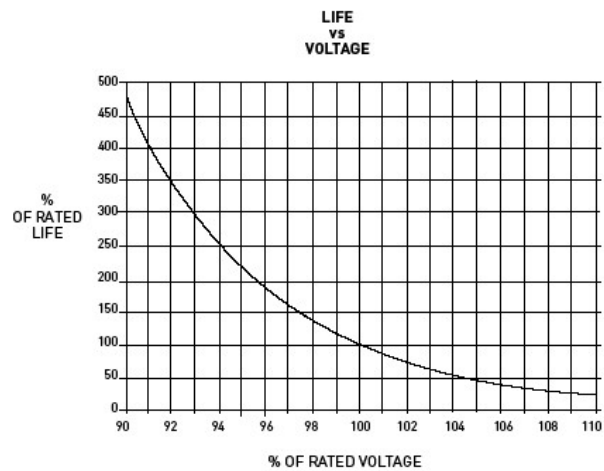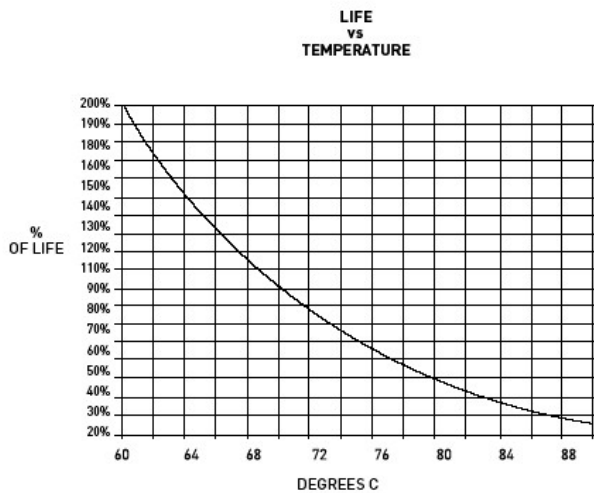


RoHS compliant: It means the capacitor complies with the EU Directive 2002/95/EC requirement restricting the use of Lead (Pb), Mercury (Hg), Cadmium (Cd), Hexavalent chromium (Cr(VI)), Poly-Brominated Biphenyls (PBB) and PolyBrominated Diphenyl Ethers (PBDE).

Safety protection: Degree of safety protection is always identified by one of below 3 codes to be marked on the capacitor:

- (P2) indicates that the capacitor will fail in the open-circuit mode only and is protected against fire or shock hazard.
- (P1) indicates that the capacitor will fail in the open-circuit OR short-circuit mode and is protected against fire or shock hazard.
- (P0) indicates that the capacitor has no specific failure protection.

Accelerated Life Test (ALT): The capacitors are operated at 125% voltage rating and temperature at 10C greater than maximum rating for 2000 hours. The capacitors shall be considered to have passed the life test if none of the following has occurred:

- A. Permanent short circuit between terminals or between terminals and case.
- B. Continuous or intermittent open circuit.
- C. Change in capacitance of greater than 3%.
- D. A dissipation factor bigger than 0.15%.

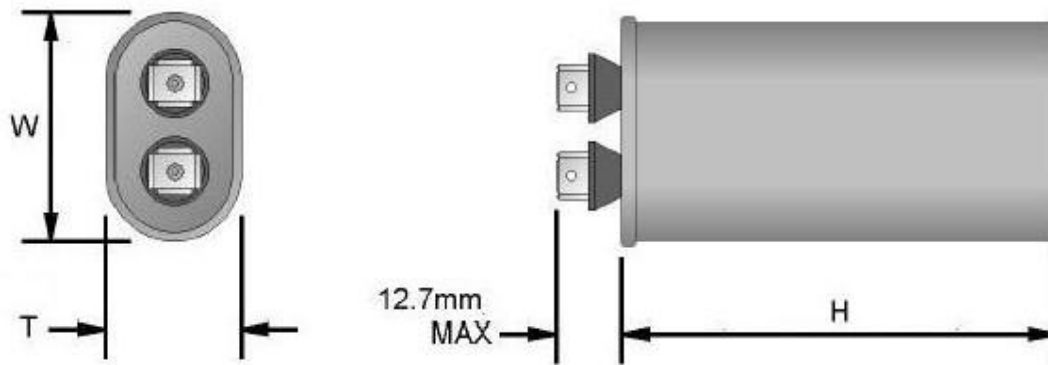

Size list: here only sizes of 370V and 440V given for example.

Cap. (uF)	370VAC			440VAC		
	Size W(mm)	Size T(mm)	Size H(mm)	Size W(mm)	Size T(mm)	Size H(mm)
2	55.1	33.5	55	55.1	33.5	55
3	55.1	33.5	55	55.1	33.5	55
4	55.1	33.5	55	55.1	33.5	55
5	55.1	33.5	55	55.1	33.5	55
6	55.1	33.5	55	55.1	33.5	65
7.5	55.1	33.5	55	55.1	33.5	65
10	55.1	33.5	65	55.1	33.5	75
11	55.1	33.5	65	55.1	33.5	75
12	55.1	33.5	65	55.1	33.5	75
12.5	55.1	33.5	70	55.1	33.5	85
15	55.1	33.5	80	55.1	33.5	95
17.5	55.1	33.5	95	73.7	47.5	70
20	55.1	33.5	95	73.7	47.5	70
25	73.7	47.5	95	73.7	47.5	80
30	73.7	47.5	95	73.7	47.5	90
35	73.7	47.5	95	73.7	47.5	100
40	73.7	47.5	95	73.7	47.5	110
45	73.7	47.5	95	73.7	47.5	115
50	73.7	47.5	95	73.7	47.5	125
55	73.7	47.5	105	92.6	50.2	90
60	73.7	47.5	110	92.6	50.2	90
65	92.6	50.2	110	92.6	50.2	95
70	92.6	50.2	110	92.6	50.2	105
75	92.6	50.2	110	92.6	50.2	110
80	92.6	50.2	110	92.6	50.2	115
85	92.6	50.2	110	92.6	50.2	120