

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.91Kg (2.01Lb) min.

Durability: 500 Cycles

Electrical

Current Rating: 1A

Contact Resistance: 35mΩ max. initial, 55mΩ max. after Test

Dielectric Withstanding Voltage: 500V/1 min.

Insulation Resistance: 1000MΩ min. initial, 100MΩ min. final

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION"


Operating Temperature: -55°C to +105°C

SCSI II/ III Connector


QA Series

Right Angle, T/H Type

1.27mm [.050"] Pitch

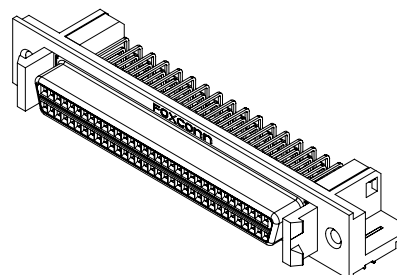

DRAWING

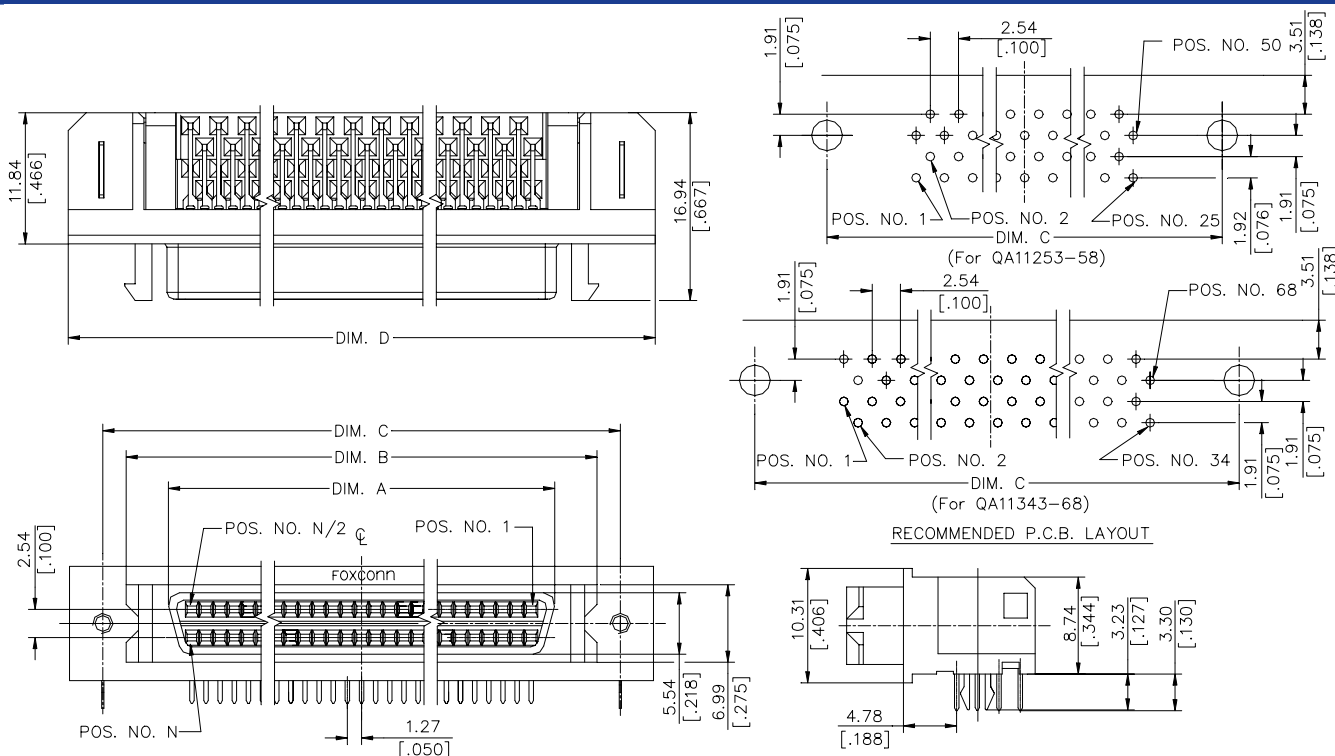

ORDERING INFORMATION

PRODUCT NO.: QA 1 1 * * * - 58/68-HT

Termination Type

1=Right Angle

Contact Design Type

1=Female

No. of Pos.

25=50 Pos.

34=68 Pos.

Package Code

HT=Tube Packing

Extension Code

Contact Area Plating

1=Gold Flash

2=20u" Gold

3=30u" Gold

6=10u" Gold

7=15u" Gold

P/N	POS.	N	DIM. A	DIM. B	DIM. C	DIM. D
QA1134*-68	68	68	46.13 [1.816]	53.72 [2.115]	57.91 [2.280]	63.88 [2.515]
QA1125*-58-HT	50	50	34.70 [1.366]	42.29 [1.665]	46.48 [1.830]	52.45 [2.065]