



REV	ECN	APPD
-	4785	

NOTES:

1 PARTS GREATER THAN 6 POSITIONS ASSEMBLED WITH APPROPRIATE COMBINATIONS OF 4 AND 6 POSITION MODULES. (4 POSITION MODULE SHOWN)

2 .197 [5mm] PITCH DIMENSIONS INDICATED IN PARENTHESES.

$$L = \text{PITCH} \times \text{POSITIONS} / 2$$

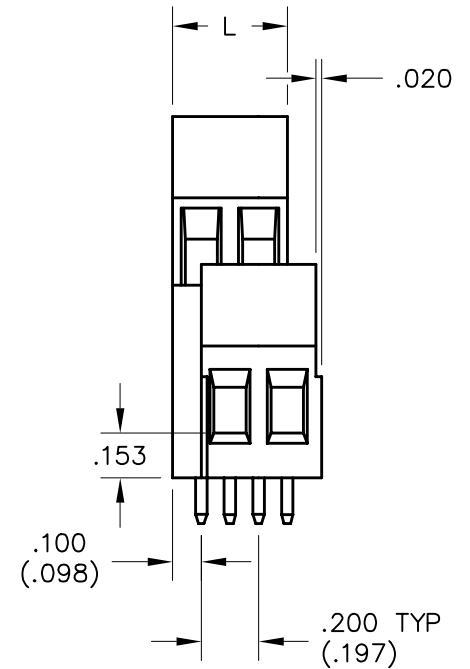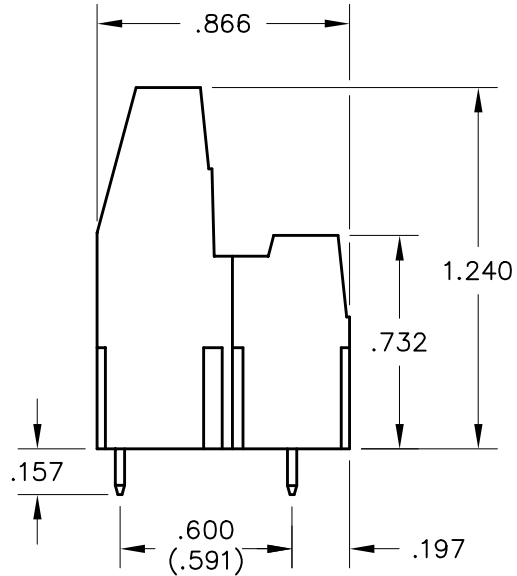

ESTTXXX40

1 NUMBER OF POSITIONS

2 PITCH:  
1=.197[5MM]  
2=.200[5.08MM]

**RU RATINGS**  
CURRENT - 24A  
VOLTAGE - 300V  
U.L. FILE NO.

**SF RATINGS**  
CURRENT - 24A  
VOLTAGE - 300V  
CSA FILE NO.


**INSTALLATION RECOMMENDATIONS**

WIRE RANGE: 12-30 AWG  
WIRE STRIP LENGTH: .256-.276  
TIGHTENING TORQUE: 4.4 LB-IN.

**MATERIALS**

HOUSING: POLYAMIDE 6/6, COLOR: BLACK  
CONTACT: COPPER ALLOY, TIN PLATED  
SCREW / CAGE CLAMP: COPPER ALLOY, NICKEL PLATED

OPERATING TEMPERATURE RANGE: -40°C TO 110°C  
RECOMMENDED PCB THICKNESS: .094 MAX

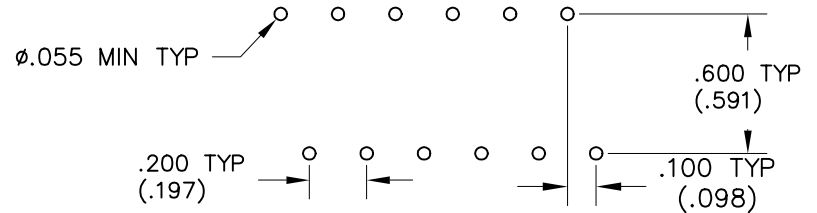

DIN VDE 0627:1986  
DIN VDE 0110-1:1989  
EN 60947-1:1991  
EN 60947-7-1:1992

CURRENT - 24A  
VOLTAGE - 250V  
TUV FILE NO.

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	<b>SPECIFICATION DRAWING</b>		<b>pcd</b>	<i>TITLE</i> ESTT TERMINAL BLOCK TALL PROFILE, 2-TIER .200/197 PITCH	
			ENGR B. JAWORSKI 11/1/01	CHKD		SIZE A	DWG NO. ESTT04140
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA		APPD	CODE: 58982	SCALE: NONE	SHEET 1 OF 1	