


## Triple Digit




### Features/Options

- ▶ Standard and high brightness chips
- ▶ Intensity grading available
- ▶ Easy use packaging in reels or tubes
- ▶ SMT package eliminates through hole soldering

### Applications/Uses


- ▶ Panel meter displays
- ▶ Time lapsed panels
- ▶ Diagnostic equipment
- ▶ Counter displays

## 0.20" triple digit

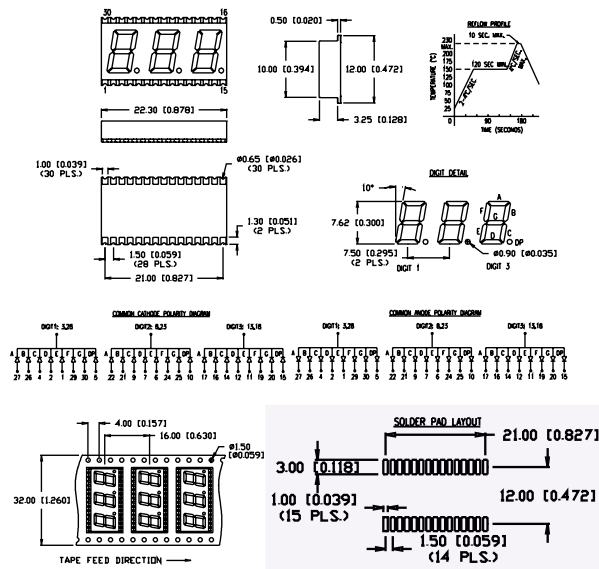

Part Number	Wave Length (nm)	Brightness (ucd) @ 10mA	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (column)
LDT-SMA2002RI-TR	565	2500	2.2	2.6	Green	Anode
LDT-SMA2004RI-TR	635	2500	2.0	2.5	Red	Anode
LDT-SMA2006RI-TR	660	8000	1.7	2.2	Red	Anode
LDT-SMA2002RISUGTR	574	7000	2.2	2.6	Green	Anode
LDT-SMA2004RI-SITR	636	15,000	2.0	2.6	Red	Anode
LDT-SMA2007RIUSBTR	470	6000	3.5	4.0	Blue	Anode
LDT-SMC2002RI-TR	565	2500	2.2	2.6	Green	Cathode
LDT-SMC2004RI-TR	635	2500	2.0	2.5	Red	Cathode
LDT-SMC2006RI-TR	660	8000	1.7	2.2	Red	Cathode
LDT-SMC2002RISUGTR	574	7000	2.2	2.6	Green	Cathode
LDT-SMC2004RI-SITR	636	15,000	2.0	2.6	Red	Cathode
LDT-SMC2007RIUSBTR	470	6000	3.5	4.0	Blue	Cathode

## 0.30" triple digit

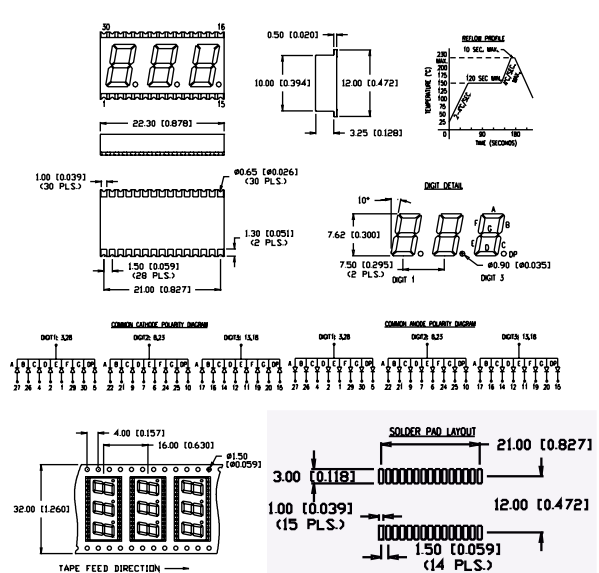

Part Number	Wave Length (nm)	Brightness (ucd) @ 10mA	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (column)
LDT-SMA3002RI-TR	565	2500	2.2	2.6	Green	Anode
LDT-SMA3004RI-TR	635	2500	2.0	2.5	Red	Anode
LDT-SMA3006RI-TR	660	8000	1.7	2.2	Red	Anode
LDT-SMA3002RISUGTR	574	7000	2.2	2.6	Green	Anode
LDT-SMA3004RI-SITR	636	15,000	2.0	2.6	Red	Anode
LDT-SMA3007RIUSBTR	470	6000	3.5	4.0	Blue	Anode
LDT-SMC3002RI-TR	565	2500	2.2	2.6	Green	Cathode
LDT-SMC3004RI-TR	635	2500	2.0	2.5	Red	Cathode
LDT-SMC3006RI-TR	660	8000	1.7	2.2	Red	Cathode
LDT-SMC3002RISUGTR	574	7000	2.2	2.6	Green	Cathode
LDT-SMC3004RI-SITR	636	15,000	2.0	2.6	Red	Cathode
LDT-SMC3007RIUSBTR	470	6000	3.5	4.0	Blue	Cathode

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29