

**Small kVA 3 Phase Isolation Transformer**

**TT2135-TT2141**

<b>VA:</b>	350, 500, 750, 1000, 1500 2000, 3000	<b>Phase:</b>	Three-Phase
<b>Input Voltage:</b>	415 Delta	<b>Frequency:</b>	50 Hz
<b>Output Voltage:</b>	600Y/347	<b>BIL:</b>	4 kV
<b>Taps:</b>	See wiring diagram	<b>Coils:</b>	Copper
<b>Insulation Class:</b>	Class F 155° C	<b>Temp Rise:</b>	100° C
<b>Impedance:</b>	2.5 - 3.5%		

Open Enclosure **10** Full 10 Year Warranty

**Feature Highlights**

10 Year Warranty  
UL Listed  
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

**Optional Features**

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


**Small kVA 3 Phase Isolation Transformer**

**TT2135-TT2141**

**60 Hz**


TT2135	350 VA
TT2136	500 VA
TT2137	750 VA
TT2138	1000 VA
TT2139	1500 VA
TT2140	2000 VA
TT2141	3000 VA

<b>Wiring Connection</b>		
<b>Pri. Volts</b>	<b>Connect Taps</b>	<b>Line Leads</b>
415	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
<b>Sec. Volts</b>	<b>Connect Taps</b>	<b>Line Leads</b>
600 (347)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

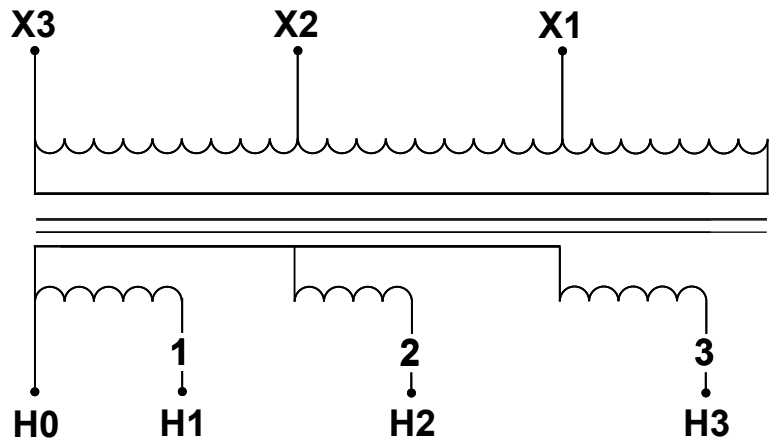

**Small kVA 3 Phase Isolation Transformer**

**TT2135-TT2141**

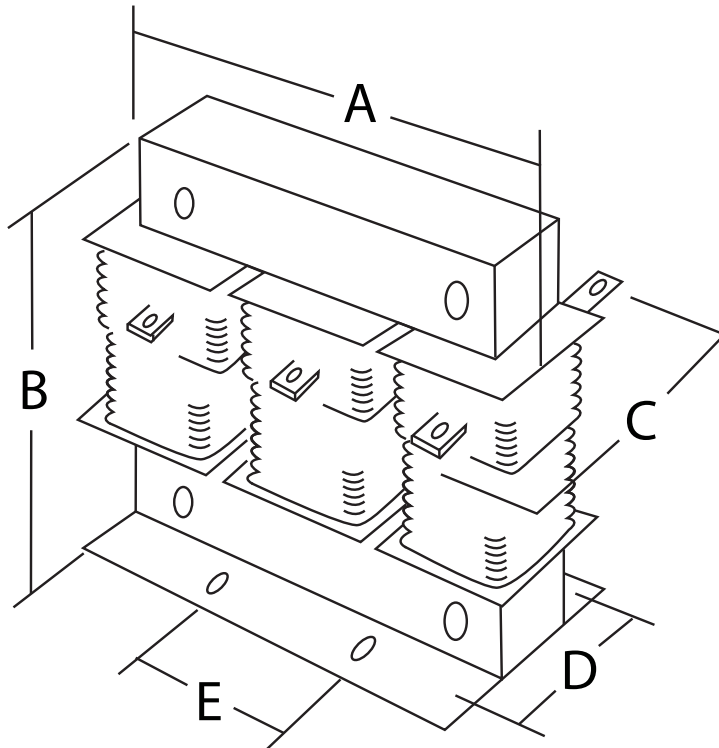

**Open Units - Dimension Table**

Part # (60 Hz)	VA	A	B	C	D	E	Mounting Holes	Ship Weight (lbs)
TT2135	350	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	12
TT2136	500	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	14
TT2137	750	9	6.75	3.9	2.75	3	0.35 x 0.788	23
TT2138	1000	9	6.75	4.1	2.75	3	0.35 x 0.788	26
TT2139	1500	9	6.75	5.4	4.25	3	0.35 x 0.788	40
TT2140	2000	9	6.75	5.55	4.25	3	0.35 x 0.788	46
TT2141	3000	9	6.75	6	4.25	3	0.35 x 0.788	55

Approximate dimensions given in inches.

Note: All dimensions are +/- 0.06 in. except for "C," which is +/- 0.25 in.