

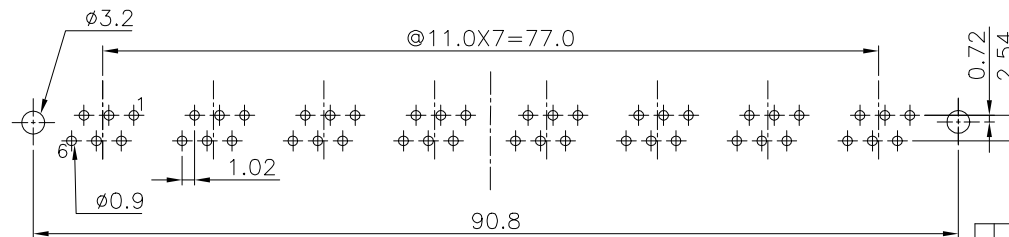
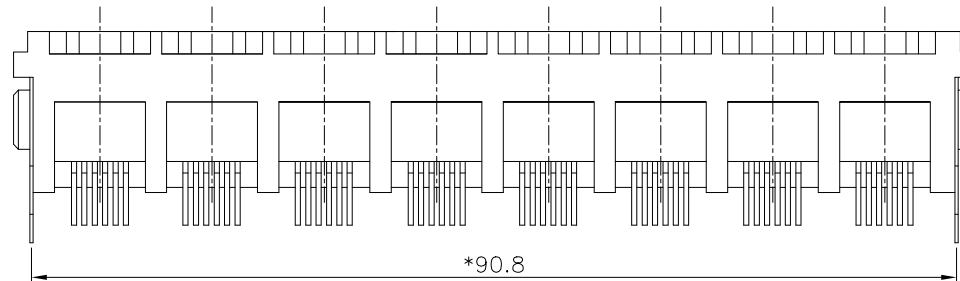


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
A		MODIFY DRAWING	QIANPU 10/8/04	

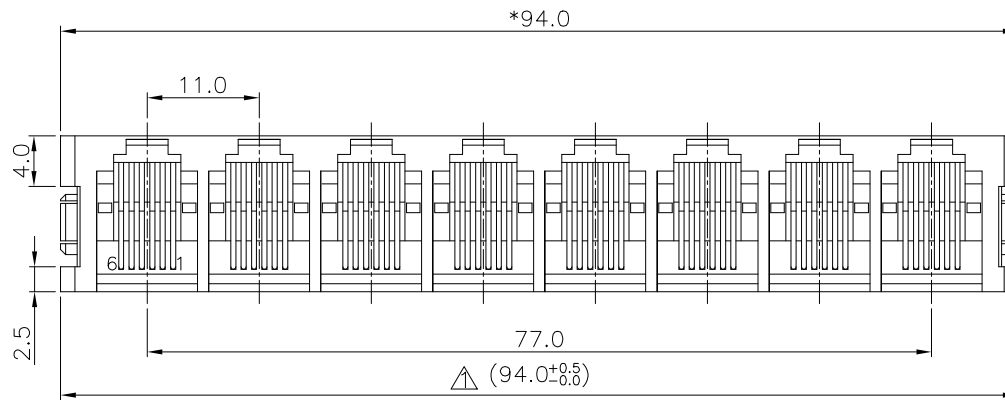

PC Board Layout Component Side Shown

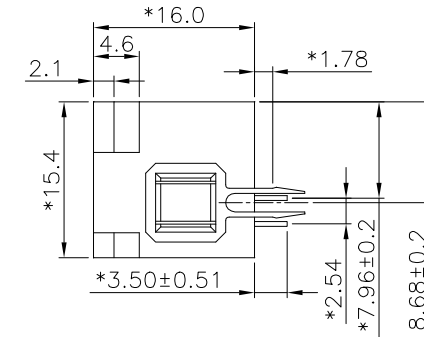

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE: -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5H6X-20GX1X

NO. OF CONTACT	1- 3u"	2- 6u"
2-2 CONTACTS	3-15u"	4-30u"
4-4 CONTACTS	5-50u"	6-Pd 20u"
6-6 CONTACTS	1-Black	2-Gray

5-0354-8

MM (INCH)		DFTO YING	DATE 7/29/99	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD LUXIN	DATE 2004/10/8		
MM		MFO	DATE	TITLE	
.0 ±0.20		APPVL LUSHENG	DATE 2004/10/8	TOP ENTRY METAL FOOT PCB JACK	
.00 ±0.15		MATERIAL :		DRAWING NO. GE5H3009	
.000 ±0.075		QT'Y :		/PART NO. SEE NOTE	
ANGLES ±		FINISH :		SIZE A3	
THIRD ANGLE PROJECTION		SCALE : 2:1		REV 1	
DETACHED LISTS		DO NOT SCALE DRAWING		SHEET X OF Y	