


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- General Purpose Switching and Amplification.
- High Total Power Dissipation.
- High h_{FE} and Good Linearity

CLASSIFICATION OF h_{FE}

Product-Rank	STB1277-O	STB1277-Y
Range	100~200	160~320

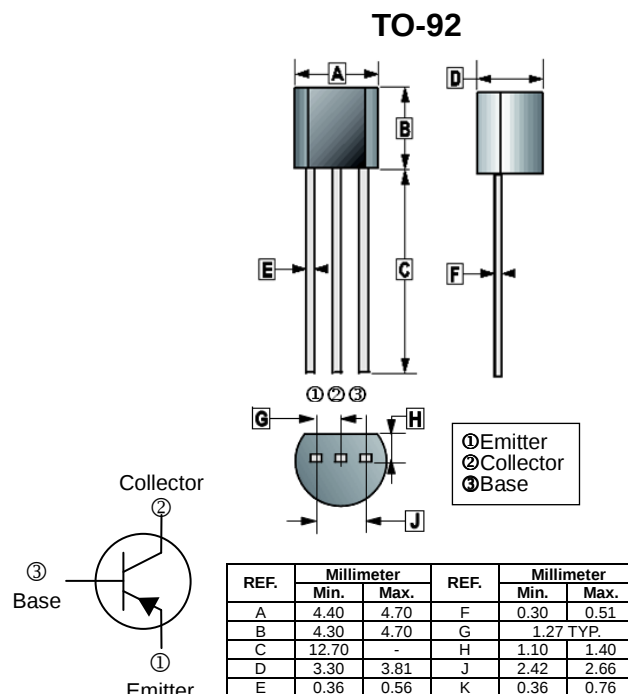

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-30	V
Collector to Emitter Voltage	V_{CEO}	-30	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-2	A
Collector Power Dissipation	P_C	0.625	W
Junction, Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-30	-	-	V	$I_C = -0.1\text{mA}, I_E = 0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	-30	-	-	V	$I_C = -1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -1\text{mA}, I_C = 0$
Collector Cut-Off Current	I_{CBO}	-	-	-0.1	μA	$V_{CB} = -30\text{V}, I_E = 0$
Emitter Cut-Off Current	I_{EBO}	-	-	-0.1	μA	$V_{EB} = -5\text{V}, I_C = 0$
DC Current Gain	h_{FE}	100	-	320		$V_{CE} = -2\text{V}, I_C = -500\text{mA}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.8	V	$I_C = -2\text{A}, I_B = -0.2\text{A}$
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	-	-	-1	V	$I_C = -500\text{mA}, V_{CE} = -2\text{V}$
Transition Frequency	f_T	-	170	-	MHz	$V_{CE} = -5\text{V}, I_C = -50\text{mA}$
Collector Output Capacitance	C_{ob}	-	48	-	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$