

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Distributed Power Architectures
Semiconductor Equipment
Microprocessor Power Applications

FEATURES

- OUTPUT CURRENT UP TO 6A
- SMALL SIZE AND LOW PROFILE :
0.80" X 0.45" X 0.22" (SMD) ; 0.9" X 0.40" X 0.20" (SIP)
- HIGH EFFICIENCY UP TO 94% @ 3.3V FULL LOAD
- INPUT RANGE FROM 2.4VDC TO 5.5VDC
- FIXED SWITCHING FREQUENCY
- SMD & SIP PACKAGES
- SMD PACKAGE QUALIFIED FOR LEADFREE REFLOW SOLDER PROCESS ACCORDING IPC J-STD-020D
- OUTPUT VOLTAGE PROGRAMMABLE FROM 0.75VDC TO 3.3VDC VIA EXTERNAL RESISTOR
- INPUT UNDER-VOLTAGE PROTECTION
- SAFETY MEETS UL60950-1, EN60950-1 AND IEC60950-1
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2011/65/EU

OPTIONS

POSITIVE LOGIC REMOTE ON/OFF

DESCRIPTION

DOS06-05T (SMD type), DOH06-05T (for Vertical Mounting SIP type) and DOH06-05TA (for Horizontal Mounting SIP type) are non-isolated DC/DC converters that can deliver up to 6A of output current with full load efficiency of 94% at 3.3V output.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			INPUT SPECIFICATIONS				
Output current	6A max		Input voltage range	Vout(set) < Vin – 0.5V	2.4 ~ 5.5VDC		
Voltage accuracy	± 2%Vout(set)		Maximum input current	Vin=Vin(min); Vout(set)=3.3V; Io=Io(max)	6A		
Minimum load	0%		Input filter (Note 5)	C filter			
Line regulation	Vin=Vout(set)+0.5V to Vin(max) at Full Load	± 0.3%Vout(set)	Input no load current	Vout(set) =0.75VDC (Vin=5V, Io=0, module enabled)	20mA 45mA		
Load regulation	No Load to Full Load	± 0.4%Vout(set)	Input under voltage lockout	Start-up voltage Shutdown voltage	2.2VDC 2.0VDC		
Ripple and noise (Note2)	20MHz bandwidth	20mVRms, max. 50mVp-p, max.	Input reflected ripple current	5~20MHz, 1μH source impedance	35mA _{p-p}		
Temperature coefficient		±0.4%	ENVIRONMENTAL SPECIFICATIONS				
Dynamic load response (Note2)	△Io / △t = 2.5A/μs ,Vin(nom)	Peak deviation	Operating ambient temperature	–40°C ~ +85°C (with derating)			
	Load change step (50% to 100% or 100% to 50% of Io(max))	Setting time (Vout<10%peak deviation)	Storage temperature range	–55°C ~ +125°C			
Dynamic load response (Note3)	△Io / △t = 2.5A/μs ,Vin(nom)	Peak deviation	Thermal shock	MIL-STD-810F			
	Load change step (50% to 100% or 100% to 50% of Io(max))	Setting time (Vout<10%peak deviation)	Vibration	MIL-STD-810F			
Output current limit		220%	Relative humidity(non-condensing)	5% ~ 95% RH			
Output short-circuit current		Continuous, automatics recovery	Lead-free reflow solder process	IPC J-STD-020D			
External load capacitance	ESR ≥1mΩ ESR ≥10mΩ	1000μF,max 3000μF,max	Moisture sensitivity level(MSL)	IPC J-STD-033B Level 2a			
Output voltage overshoot-startup	Vin=2.4 ~ 5.5V, F.L.	1% Vout(set)	Over temperature protection	135 °C			
Voltage adjustability (see fig.1)	(Note 4)	0.7525V ~ 3.63V	FEATURE SPECIFICATIONS				
GENERAL SPECIFICATIONS							
Efficiency	See table		Remote ON/OFF(Note 6)	ON = Open or 0V < Vr < 0.3V OFF = 1.5V < Vr < Vin(max)			
Isolation voltage	None		(Negative logic)(standard)	I _{IN} =10μA, max I _{IN} =1mA, max			
Switching frequency	300kHz±10%		(Positive logic)(option)	ON = Open or Vin(max) OFF=0V < Vr < 0.3V			
Design meets safety standard	IEC60950-1, UL60950-1, EN60950-1		Input current of Remote control pin	I _{IN} =10μA, max I _{IN} =1mA, max			
Dimensions	SMD 0.80 X 0.45 X 0.22 Inch (20.3 X 11.4 X 5.5 mm)		Remote off state input current	Nominal Input 10μA~1.0mA			
	SIP 0.90 X 0.40 X 0.20 Inch (22.9 X 10.2 X 5.0 mm)		Rise time	Time for Vout to rise from 10% to 90% of Vout(set)			
Weight	2.8g(0.1oz)		Turn-on delay time	Case 1 (Note 7) Case 2 (Note 8)			
MTBF (Note 1)	MIL-HDBK-217F	9.398 x 10 ⁶ hrs		1ms 1ms			



Model Name	ON/OFF Logic	Package	Input Voltage	Output Voltage	Output Current		Efficiency (%) 5.0Vin, 3.3VDC@6A
					Min. Load	Max. Load	
DOS06-05T	Negative	SMD	2.4 ~ 5.5VDC	0.75 ~ 3.3VDC	0A	6A	94%
DOS06-05T-P	Positive	Vertical Mounting SIP	Vin(min)=Vout(set)+0.5V				
DOH06-05T	Negative	Horizontal Mounting SIP					
DOH06-05T-P	Positive						
DOH06-05TA	Negative						
DOH06-05TA-P	Positive						

Note

1. MIL-HDBK-217F @Ta=25 °C, Full load.
2. External with $C_{out} = 1\mu F$ ceramic// $10\mu F$ tantalum capacitors.
3. External with $C_{out} = 2$ pcs of $150\mu F$ polymer capacitors.
4. Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as R_{trim} in Table 1) between the TRIM and GND pins of the module. To calculate the value of the resistor R_{trim} for a particular output voltage V_{out} , use the following equation:
5.
$$R_{trim} = \left[\frac{21070}{V_{out} - 0.75} - 5110 \right] \Omega$$
 It's necessary to equip the external input capacitors at the input of the module. The capacitors should connect as close as possible to the input terminals that ensuring module stability. The external C_{in} is 2pcs of $150\mu F$ low-ESR polymer capacitors // 2pcs of $47\mu F$ ceramic capacitors at least.
6. Device code with suffix “-P” – Positive logic(ON/OFF is open collector/drain logic input; Signal referenced to GND)
- Device code with no suffix – Negative logic (ON/OFF pin is open collector/drain logic input with external pull-up resistor; signal referenced to GND)
7. Case 1 :On/Off input is set to logic low (module on) and then input power is applied (delay from instant at which $Vin=Vin(min)$ until $Vout=10\%$ of $Vout(set)$)
8. Case 2 :Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay form instant at which $Von/off=0.3V$ until $Vout=10\%$ of $Vout(set)$)

CAUTION: This power module is not internally fused. An input line fuse must always be used.

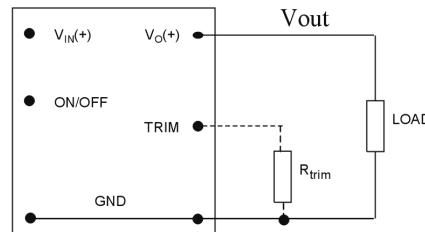
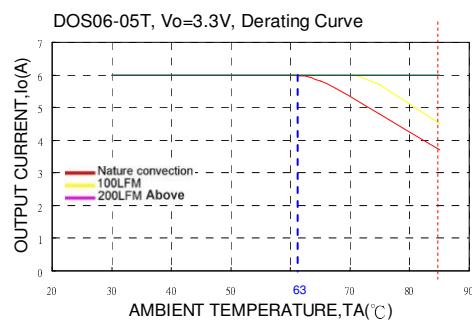


Fig. 1


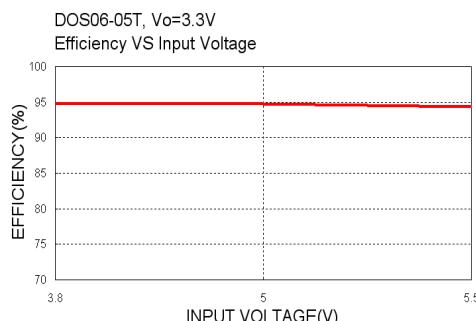



Table 1	
Vout(set) (V)	Rtrim (KΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160



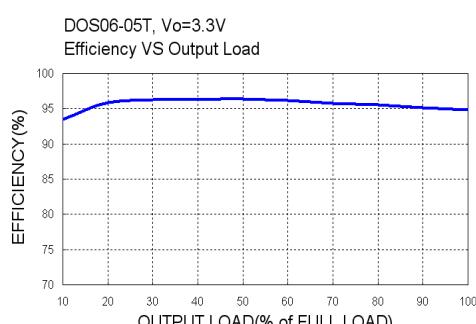


MECHANICAL DRAWING :

DOH06-05T TYPE

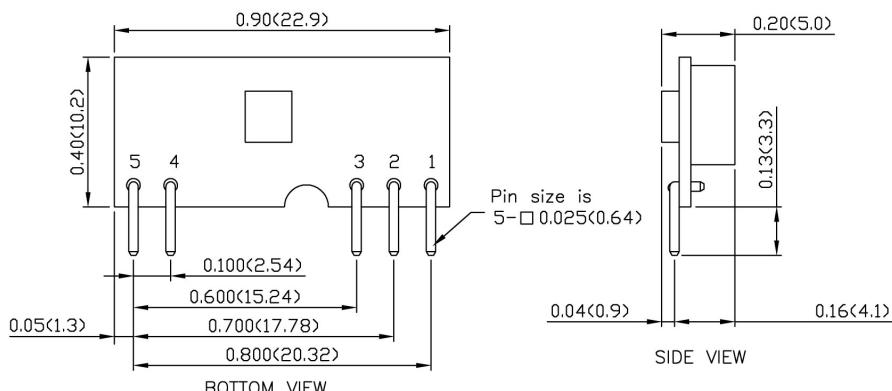


PIN CONNECTION	
PIN	DEFINITION
1	+OUTPUT
2	TRIM
3	GND
4	+ INPUT
5	CTRL

DOH06-05TA TYPE

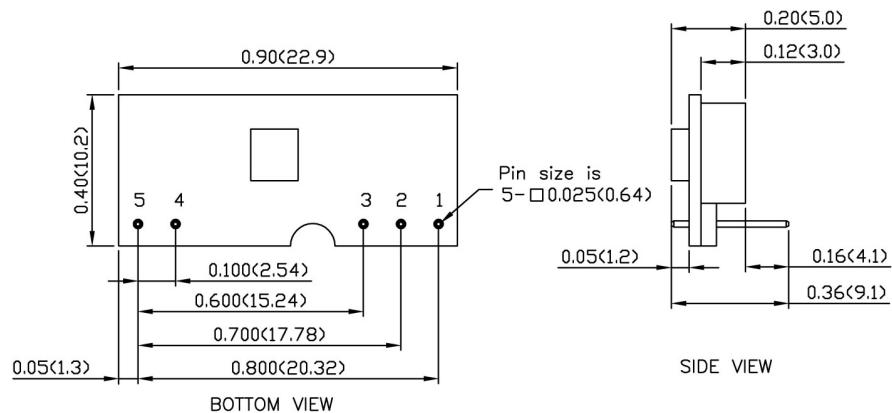

PIN CONNECTION	
PIN	DEFINITION
1	+OUTPUT
2	TRIM
3	GND
4	+ INPUT
5	CTRL

DOS06-05T TYPE

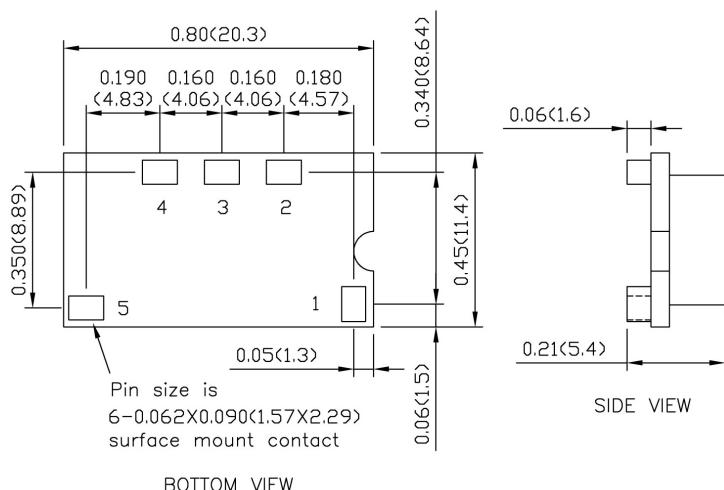

PIN CONNECTION	
PIN	DEFINITION
1	CTRL
2	+OUTPUT
3	TRIM
4	GND
5	+ INPUT

1. All dimensions in Inch (mm)

Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)

2. Pin pitch tolerance ±0.01 (0.25)
3. Pin dimension tolerance ±0.004 (0.1)