




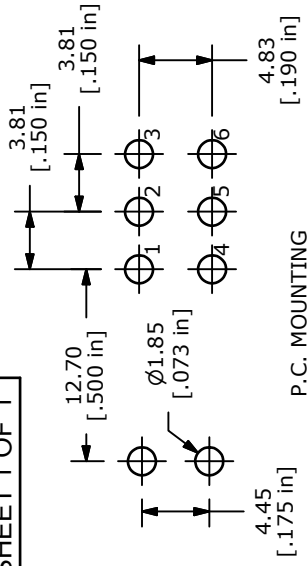


SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
ON	NONE	ON	
2-1, 5-4	N/A	2-3, 5-6	



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RATING: 5A @120VAC OR 28VDC, 2A @250VAC
- ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- CONTACT RESISTATNCE: 10 m-OHMS TYP.
- 2002/95/EC (ROHS) COMPLIANT

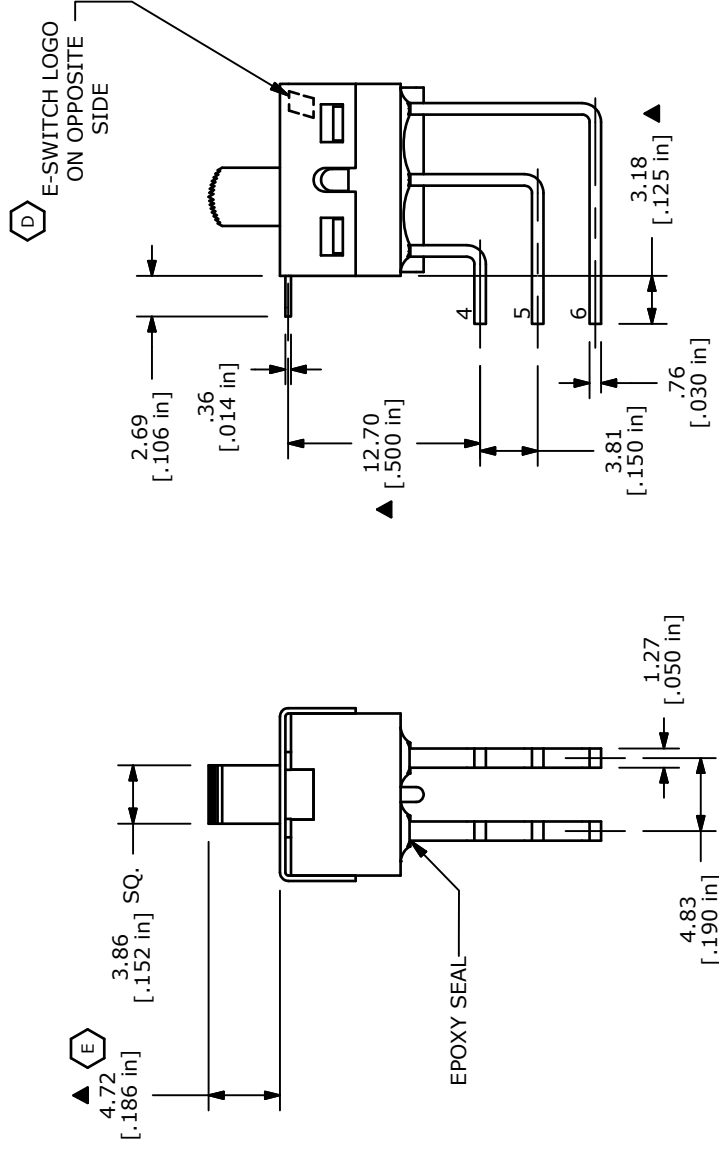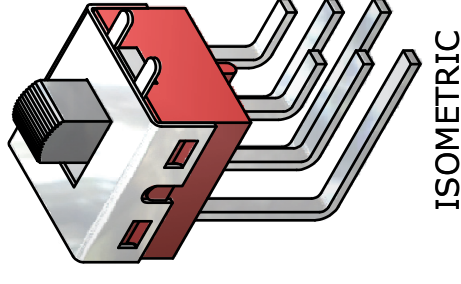

E-SWITCH™

TITLE 500SDP1S1M7QEA

E	19570	DRAWING UPDATE / CLEAN-UP	1/7/11	BGL
D	18678	REVISED LOGO LOCATION NOTE	10/12/09	BLR
C	16919	REVISED AND REDRAWN	1/25/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	2:1	DATE	10/12/2009	DR	BLR	DWG	T521012	REV	E
-------	-----	------	------------	----	-----	-----	---------	-----	---