



Bestückungsplan / contact layout

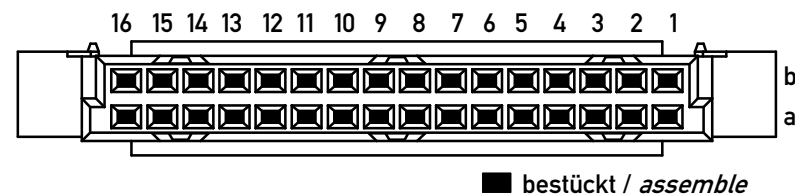

Leiterplatten-Lochbild / PCB drillhole pattern

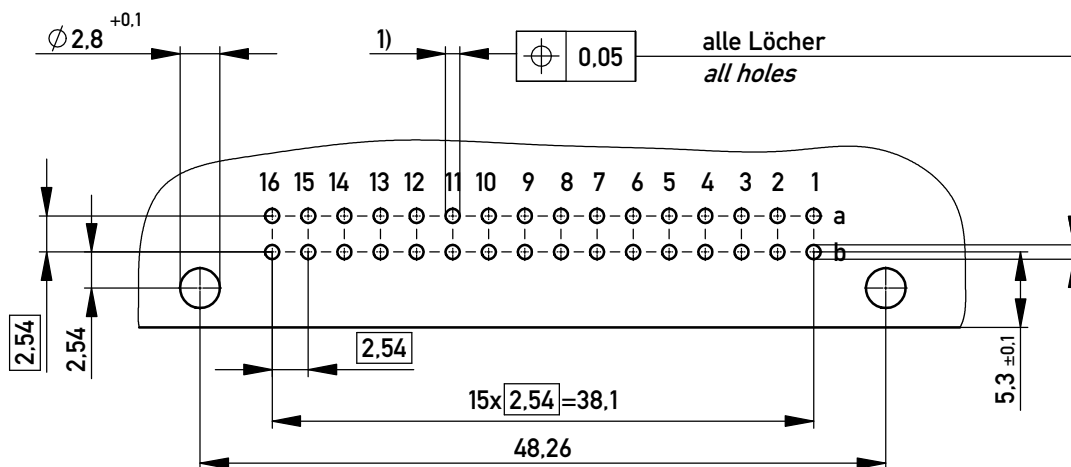

Elastische Einpresszone / compliant pressfit zone  
 Isolierwerkstoff / housing material: PBT GF30  
 Bauart 7 / type 7  
 Anforderungsstufe 2 = 400 Steckzyklen / class 2 = 400 mating cycles  
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2  
 Missing information and dimensions per IEC 60 603-2  
 Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6  
 diameter of drilled hole see drawing 164062/No.6  
 1)  $\phi 1.0^{+0.09}_{-0.06}$  Durchmesser des metallisierten Loches  
 $\phi 1.0^{+0.09}_{-0.06}$  diameter of finished plated-through hole

Information:  All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances  All Dimensions in mm	Scale 2:1	Designation <b>Federleiste Q/2 32 EE</b> <i>female conn. Q/2 32 pressfit</i>
	Subject to modification without prior notice. Drawing will not be updated.	www.ERNI.com	
b Index	13.12.2011 Date		i A3 Class STVQ/2

Copyright by ERNI GmbH  
Proprietary notice pursuant to ISO 16016 to be observed.