

GI1182

PNP SILICON EPITAXIAL PLANAR TRANSISTOR


Description

The GI1182 is designed for medium power amplifier applications.

Features

- Low collector saturation voltage : $V_{CE(sat)} = -0.5V$ (Typ.)

Package Dimensions

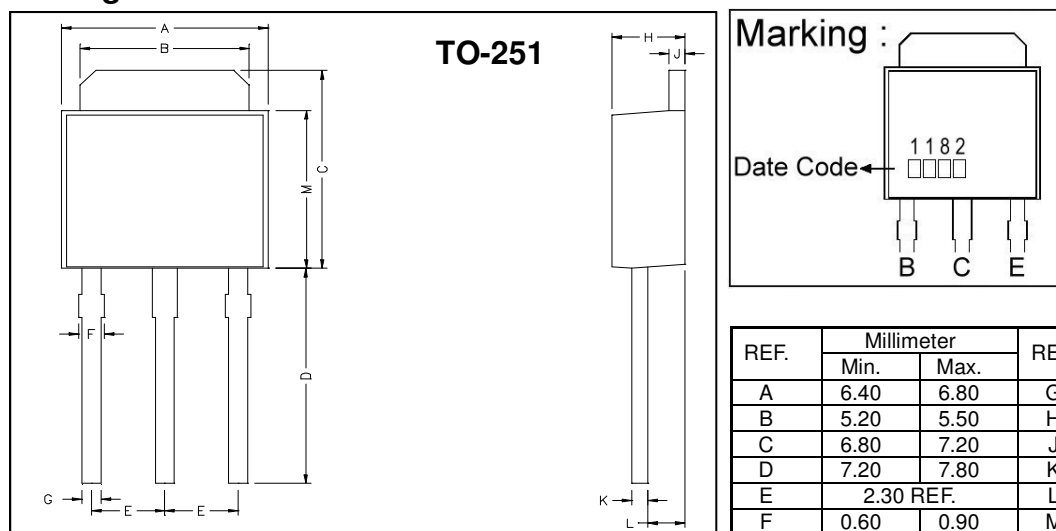

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Ratings	Unit
Junction Temperature	T_j	+150	$^\circ C$
Storage Temperature	T_{stg}	-55~+150	$^\circ C$
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-32	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-2	A
Collector Current (Pulse, $P_w=100ms$)	I_C	-3	A
Total Power Dissipation($T_c=25^\circ C$)	P_D	10	W

Electrical Characteristics ($T_a = 25^\circ C$, unless otherwise noted)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
V_{CBO}	-40	-	-	V	$I_C = -50\mu A$, $I_E = 0$
V_{CEO}	-32	-	-	V	$I_C = -1mA$, $I_B = 0$
V_{EBO}	-5	-	-	V	$I_E = -50\mu A$, $I_C = 0$
I_{CBO}	-	-	-1	μA	$V_{CB} = -20V$, $I_E = 0$
I_{EBO}	-	-	-1	μA	$V_{EB} = -4V$, $I_C = 0$
* $V_{CE(sat)}$	-	-500	-800	mV	$I_C = -2A$, $I_B = -200mA$
* h_{FE}	82	-	390		$V_{CE} = -3V$, $I_C = -500mA$
f_T	-	100	-	MHz	$V_{CE} = -5V$, $I_C = -500mA$, $f = 100MHz$
Cob	-	50	-	pF	$V_{CB} = -10V$, $I_E = 0$, $f = 1MHz$

* Pulse Test: Pulse Width $\leq 380\mu s$, Duty Cycle $\leq 2\%$

Classification Of h_{FE}

Rank	P	Q	R
Range	82 ~ 180	120 ~ 270	180 ~ 390

Characteristics Curve

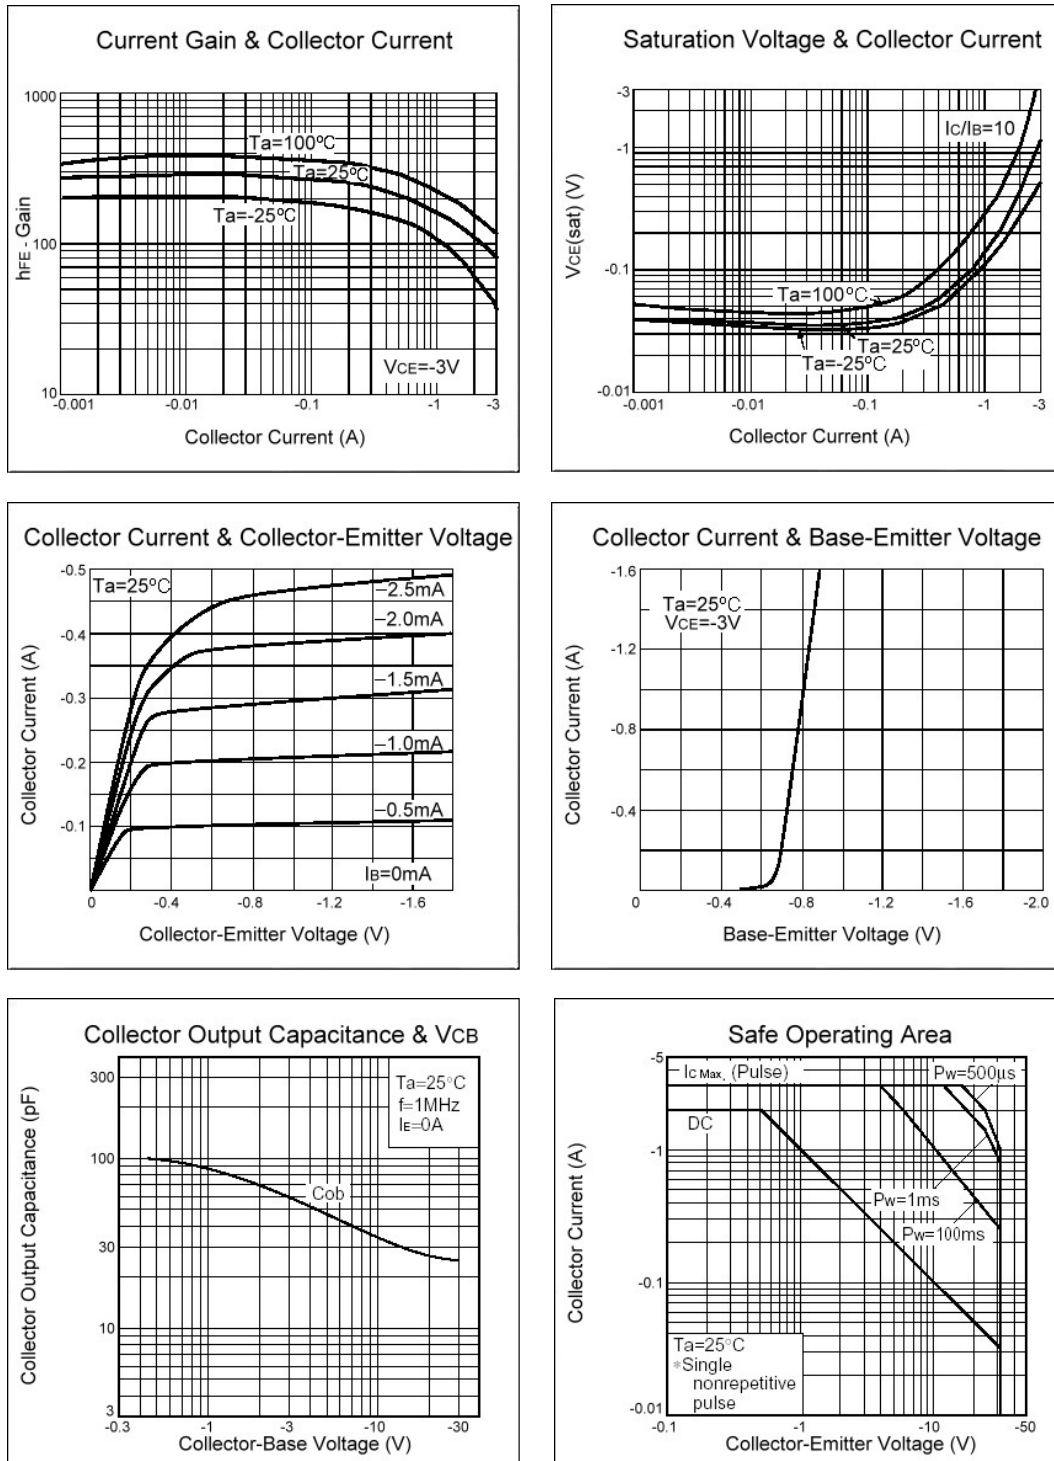

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165