


CONTACT CONFIGURATION

\*(Pos. 1 Denotes Pin No. 1)

RECOMMEND P.C.B. LAYOUT

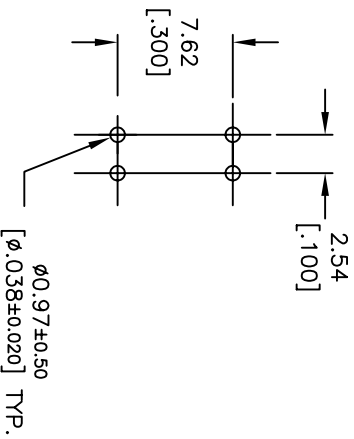

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  - ▲ 4. CONTACT RATINGS: 25mA @24VDC.
  5. MATERIAL (TERMINALS/CONTACTS):  
PHOSPHOR BRONZE w/Gold Plate over  
Nickel Plate
  6. INSULATION RESISTANCE:  
100Mega-OHMS min @500VDC
  7. CONTACT RESISTANCE (INITIAL):  
50MILLI-OHMS @2-4VDC @100mA
  8. OPERATING FORCE: 1000gf max.
  9. TRAVEL: 2mm typical
  10. PACKAGED: DISPENSING TUBES  
WITH ALL POLES IN THE "OFF" POSITION.
  11. ▲ DENOTES CRITICAL PARAMETER.
  12. 2002/95/EC (ROHS) COMPLIANT

B	16865	REVISED AND REDRAWN	1/15/2007	TN
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE		KAS1102E		
SCALE	DATE	DR	DWG	REV
2:1	1/15/2007	TN	N211020	B

