

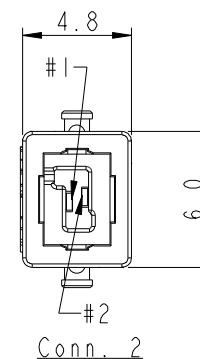
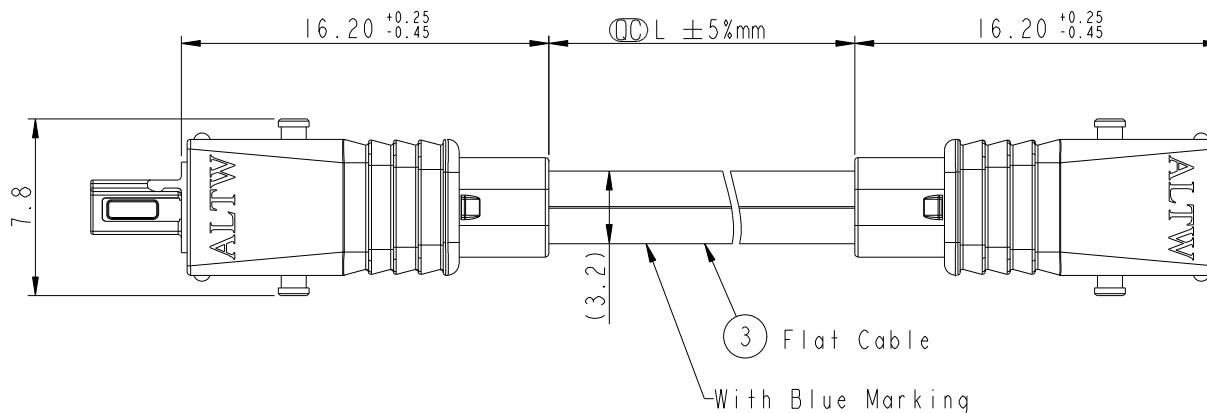


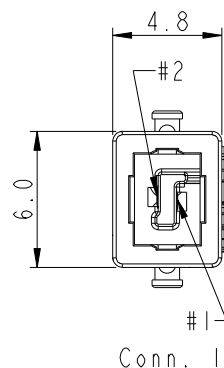

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-04-16	Fisher	Initial Release

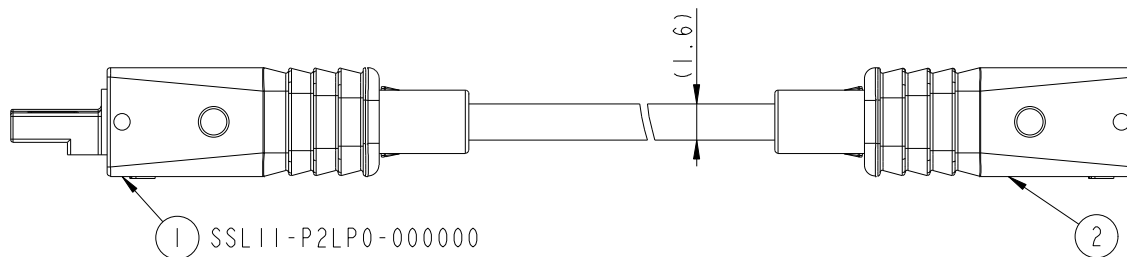


SSL11-P2LJP-022DXX

06: L=600mm.
Cable Length Range(L): 100~9900mm

22: 22AWG

LOCK&LATCH OPTION
0: W/O LOCK



- Notes:
- * $\varnothing$ Important Dimensions To Check.
 - * Housing: Thermoplastic, UL94V-0, Natural White.
 - * Terminal: Copper Alloy, Gold Plated.
 - * Hood: Thermoplastic, UL94V-0, Natural White.
 - * SR Mold: PP, UL94V-0, Natural White.
 - * Flat Cable: UL21016, 2F * 22AWG, XLPE Insulation, White

2	White	2
1	Blue Marking	1
Conn. 1	Wire Color	Conn. 2
Pin Out		

UNIT:mm		TITLE	SSL1.1 Flat Cable, 2-Pos. W/O Lock, Plug to Jack
TOLERANCE		SCALE	3:1
.X ±0.25		SIZE	A4
.XX ±0.1		SHEET	1 OF 1
.XXX ±0.05		REV.	A
ANGLES ±1°		WC-REV.	A.2
			$\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Fisher_Wang	2014-04-16
SSL11-P2LJP-022DXX	CHECKED BY	DATE
CUSTOMER	Ivan_Lin	2014-04-16
ALTW	APPROVED BY	DATE
	Kevin_Hu	2014-04-16

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.