
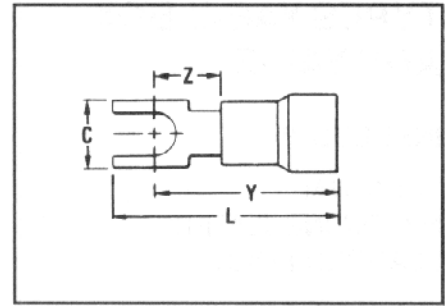


### TYPES TP-F AND BA-EF

VINYLUG™

TERMINAL -  
POLYVINYLCHLORIDE  
INSULATED, FORK TONGUE

600 VOLTS MAX. 105° C MAX

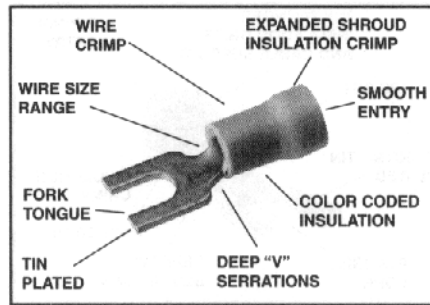

B-31

### Features and Benefits

The Type TP-F is a fork tongue variation of the TP design and makes installation easier.

- Fork tongue design.
  - ◇ Faster installation-screw needs only to be loosened for termination.



CATALOG NUMBER	WIRE RANGE	STUD SIZE	DIMENSIONS				BULK CATALOG NUMBER •	INSTALLATION TOOLING	TAPE MOUNTED CATALOG NO. 2000/Reel	INSTALLATION TOOLING	WIRE STRIP LENGTH
			C	L MAX.	Y MAX.	Z MIN.					
TP16-2F	22-16	1-2	.17	.75	.66	.23	BA16EF2	Plier Type: Y10-22	BA16EF2M	TFM with DFM3D-1 Die	13/64"
TP16-6F	Max. Insul.	4-6	.28	.80	.66	.23	BA16EF6		BA16EF6M		
TP16-8F	Dia. Accom.: .145	6-8	.31	.86	.69	.26	BA16EF8		BA16EF8M		
TP16-10F	Color Code: Red	8-10	.41	.95	.75	.31	BA16EF10		BA16EF10M		
TP14-2F	16-14	1-2	.17	.75	.66	.23	BA14EF2	Ratchet Tool: MR8-89-1, MR15	BA14EF2M	TFM with DFM2D-1 Die	13/64"
TP14-6F	Max. Insul.	4-6	.28	.80	.66	.23	BA14EF6		BA14EF6M		
TP14-8F	Dia. Accom.: .180	6-8	.31	.86	.69	.26	BA14EF8		BA14EF8M		
TP14-10F	Color Code: Blue	8-10	.41	.95	.75	.31	BA14EF10		BA14EF10M		
TP10-6F	12-10	4-5	.28	.95	.81	.26	BA10EF6		*BA10EF6M	TFM with DFM1D5 Die	19/64"
TP10-8F	Max. Insul.	6-8	.31	.98	.81	.26	BA10EF8		*BA10EF8M		
TP10-10F	Color Code: Yellow	8-10	.41	1.07	.87	.31	BA10EF10		*BA10EF10M		

• UL and CSA listed with MR8-89-1 and MR15.  
\* 1000/Reel.