

Photo Interrupter

KIT4001A

Description

The KIT4001A is a high performance transmissive type photo interrupter, combines high-output GaAs IRED with high sensitive phototransistor.

Features

- PWB direct mount type.
- Widely applicable.
- 4.5mm gap.
- RoHS compliant.



Applications

- Cameras.
- Copiers.
- Printers.
- Ticket vending machines.

Absolute Maximum Ratings (T_a=25°C, Unless otherwise specified)

Characteristic		Symbol	Ratings	Unit
Input	Power Dissipation	P _D	75	mW
	Forward Current	I _F	50	mA
	Reverse Voltage	V _R	5	V
	Peak Forward Current ^{*1}	I _{FP}	0.5	A
Output	Power Dissipation	P _D	75	mW
	Collector Current	I _C	20	mA
	Collector-Emitter Voltage	V _{CEO}	30	V
	Emitter-Collector Voltage	V _{ECO}	5	V
Operating Temperature ^{*2}		T _{opr}	-20 ~ +85	°C
Storage Temperature ^{*2}		T _{stg}	-30 ~ +85	°C
Soldering Temperature ^{*3}		T _{sol}	260	°C

*1 : Pulse width (tw) ≤ 100μs, Period (T) = 10msec.

*2 : No icebond or dew.


*3 : The soldering should be 1mm away from bottom of the case t=within 5sec

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Electrical Characteristics (T_a=25°C)









Characteristic		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	-	1.2	1.7	V
	Peak Wavelength	λ _p	I _F =20mA	-	940	-	nm
	Reverse Current	I _R	V _R =5V	-	-	10	uA
Output	Dark Current	I _{CEO}	V _{CE} =10V, E=0lux	-	1	100	nA
	Peak Wavelength	λ _p	-	-	880	-	nm
Transfer Characteristics	Collector Current	I _C	V _{CE} =5.0V, I _F =20mA (Non shading)	0.2	-	-	mA
	Leakage current	I _{CEOD}	I _F =10mA, V _{CE} =5V Shading	-	0.5	10	uA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.1mA, I _F =20mA	-	-	0.4	V
Response Time	Rise Time	t _r	V _{CC} =5.0V, I _C =0.1mA RL=1KΩ	-	50	-	usec
	Fall Time	t _f		-	50	-	usec

- Circuit for Measuring Response Time

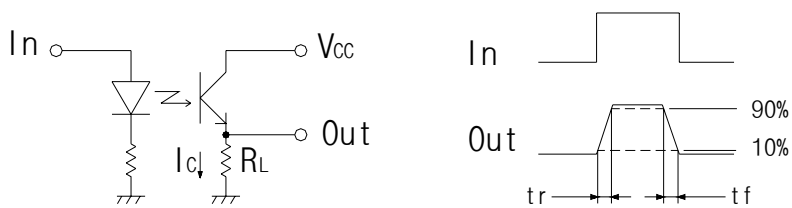


The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.


Electrical and optical characteristic curves

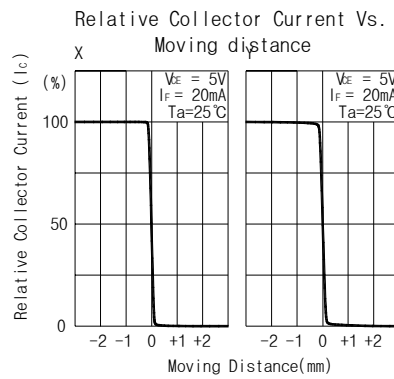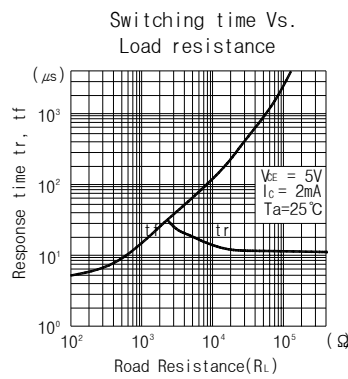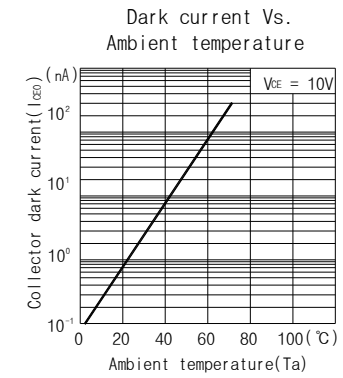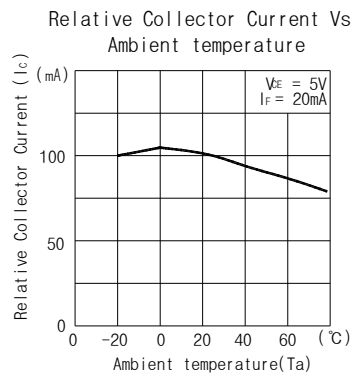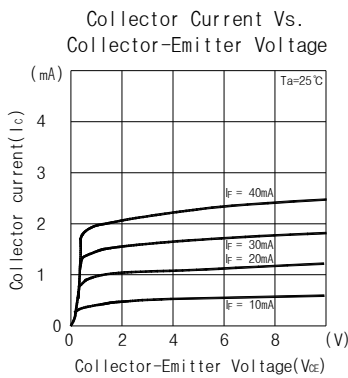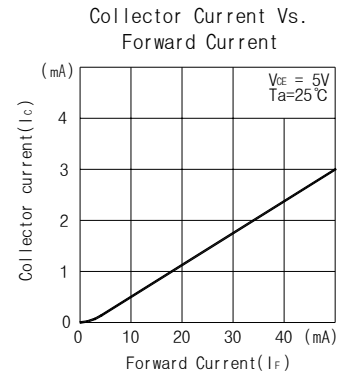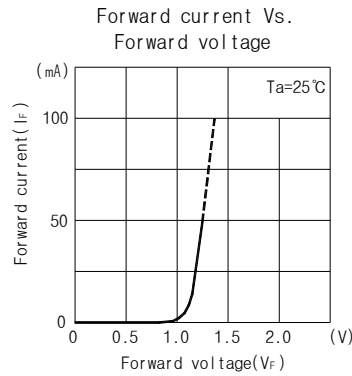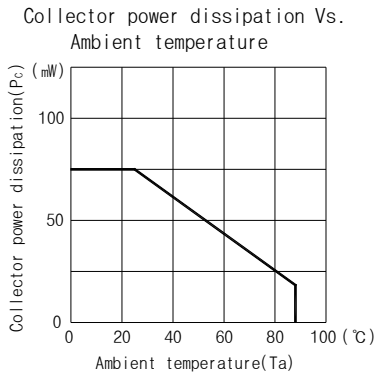

Switching time measurement circuit




Method of measuring position detection characteristic

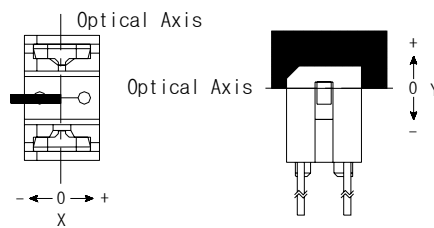

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.

Package Outline Dimensions(Unit : mm)

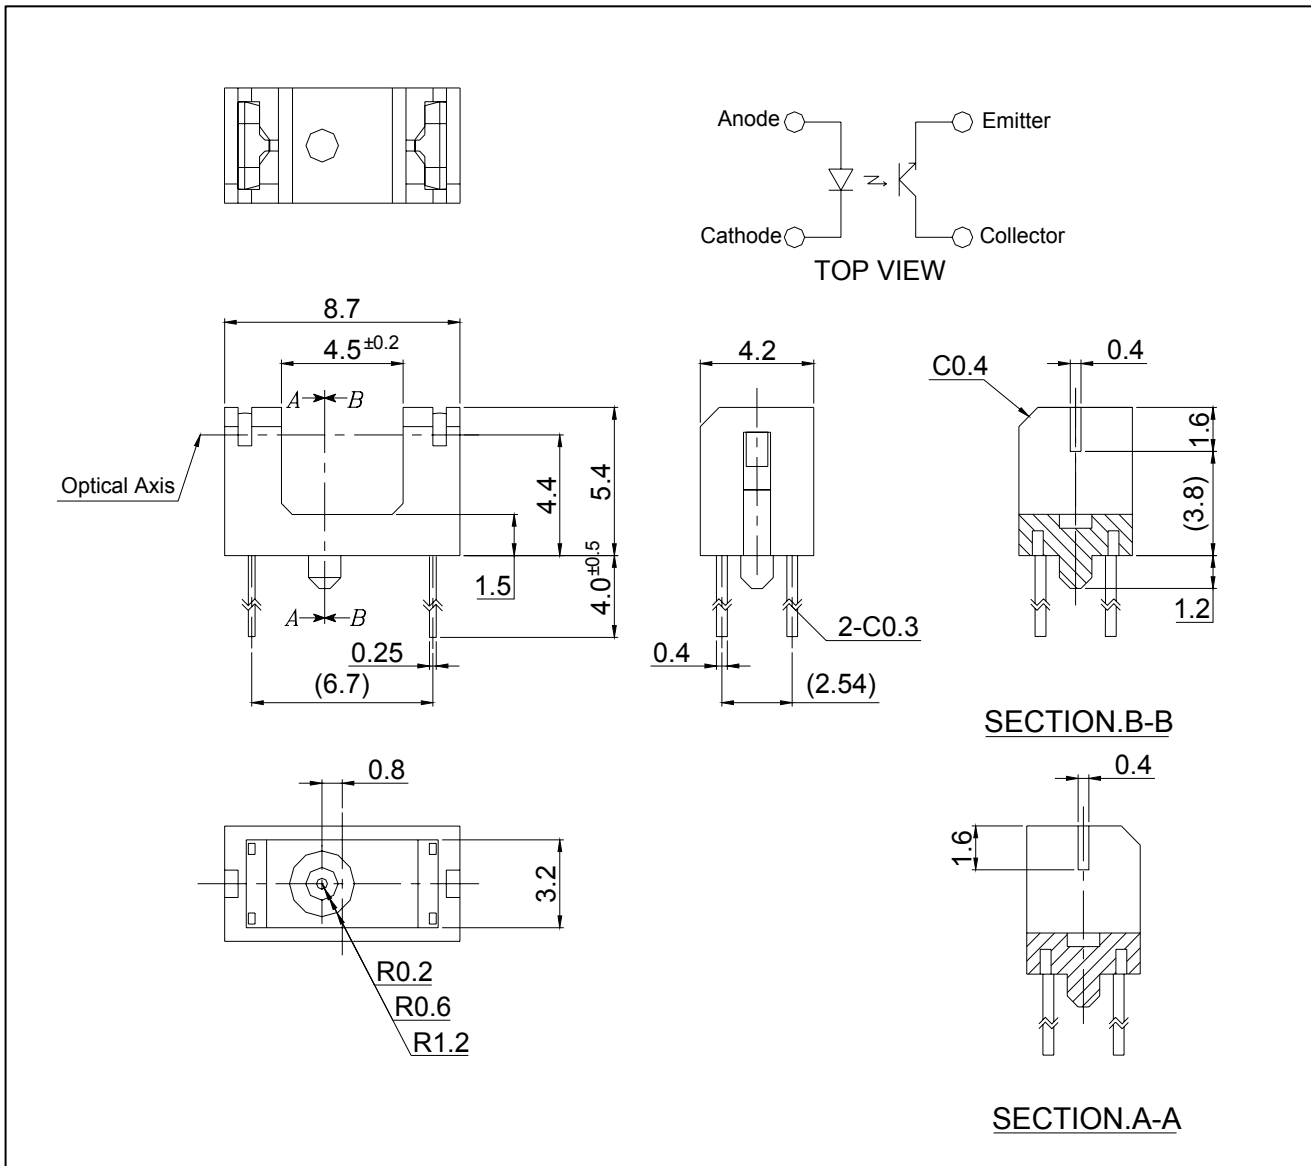

The contents of this data sheet are subject to change without advance notice for the purpose of improvement. When using this product, would you please refer to the latest specifications.