



Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MBR10200CT

10 Amp High Voltage Power Schottky Barrier Rectifier 200 Volt

Features

- High Junction Temperature Capability
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Low Leakage Current
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Marking: Type Number

Maximum Ratings

- Operating Junction Temperature : 150°C
- Storage Temperature: - 65°C to +150°C
- Type Thermal Resistance 2.5°C/W Junction to Case

MCC Catalog Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR10200CT	200 V	140V	200 V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10 A	$T_L = 100^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	150A	8.3ms half sine
Maximum Instantaneous Forward Voltage	V_F	.95V	$I_{FM} = 10A$ * $T_J = 25^\circ\text{C}$
Maximum Reverse Current At Rated DC Blocking Voltage	I_R	0.5mA 50m A	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ *

*Pulse Test: Pulse Width 300µsec, Duty Cycle 1%

Note:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

TO-220AB

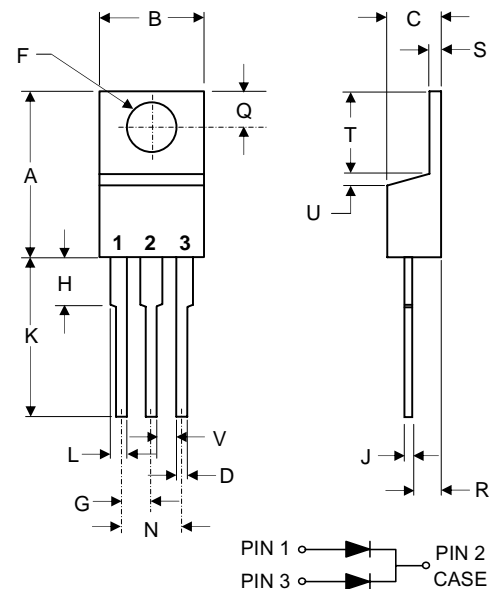

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	∅
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	----	.050	----	1.27	
V	.045	----	1.15	----	



KERSEMI

MBR10200CT

FIG.1-FORWARD CURRENT DERATING CURVE

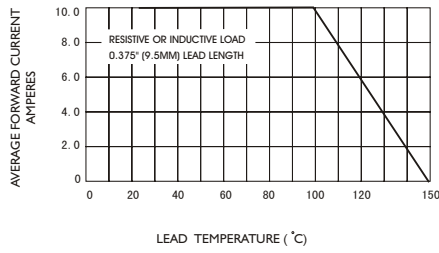


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

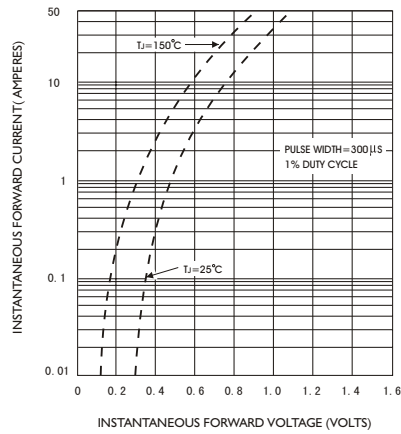


FIG.5-TYPICAL JUNCTION CAPACITANCE

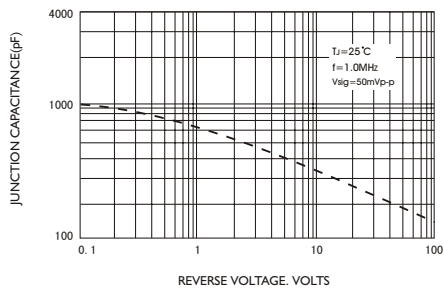


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

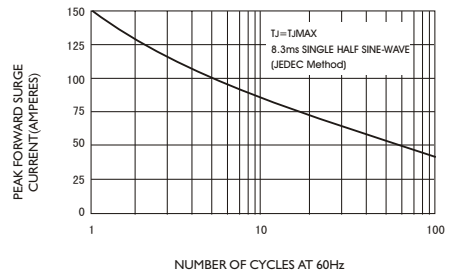


FIG.4-TYPICAL REVERSE CHARACTERISTICS

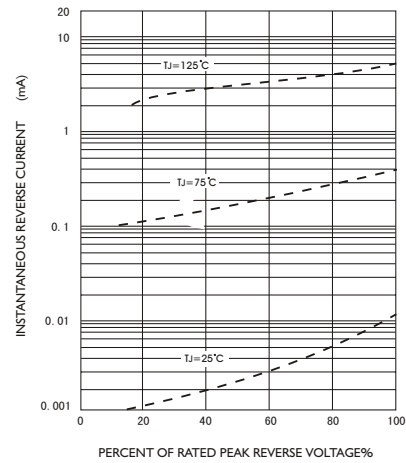


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

