


Internal Ribbon Cable, Dual Ultra, 33/66/100 ATA/DMA EIDE, (3Conn 40P), 18-in.

MODEL NUMBER: **P906-18I**

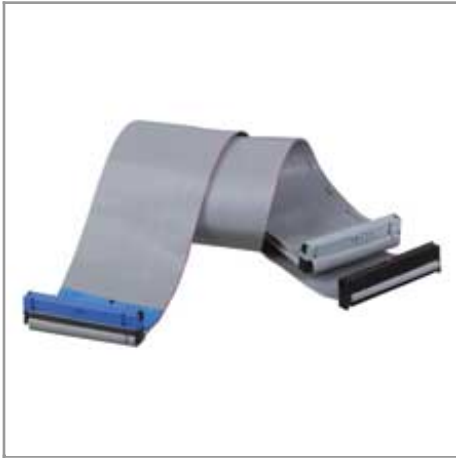

Highlights

- An assortment of high quality internal cables
- Includes IDE and EIDE ribbon cables, power cables and CD-ROM cable assemblies

System Requirements

- EIDE device drive
- EIDE controller channel with Pin 20 blocked

Package Includes

- 18-in. Int Dual Ultra 33/66/100 ATA/DMA EIDE Ribbon Cable 3Conn 40P

Description

Tripp Lite's enhanced IDE (EIDE) ribbon cable connects up to two internal IDE hard drives to a controller card. This internal dual Ultra DMA/ATA ribbon supports UDMA/33, ATA/66 and ATA/100. This 18-inch cable is constructed with 80 conductor ribbon and contains three 40pin socket connectors (one for the controller card and the other two for drives).

Features

- Connects up to two internal IDE hard drives to a controller card
- 80 conductor cable
- Supports UDMA/33, ATA/66 and ATA/100
- Cable contains three 40pin socket connectors (one for the controller card and the other two for drives)
- NOTE: pin 20 on the controller side is blocked so this is not a generic EIDE cable solution. controllers must be missing pin 20 to attach to this cable

Specifications

OVERVIEW	
Cable Type	Ribbon/Internal
INPUT	
Cable Length (ft.)	1.5
Cable Length (m)	0.46
Cable Length (in.)	18
PHYSICAL	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Color	Gray
ENVIRONMENTAL	
Operating Temperature Range	(-10°) - 75° C
Storage Temperature Range	(-20°) - 80° C
CONNECTIONS	
Connector A	40 POS. SOCKET (FEMALE)
Connector B	40 POS. SOCKET (FEMALE) (X2)
Connector C	40 pos. Socket (Female)
Number of Connectors	3
CERTIFICATIONS	
Certifications	RoHS-Compliant
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2015 Tripp Lite. All rights reserved. All trademarks are the sole property of their respective owners. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos may differ slightly from final products.