
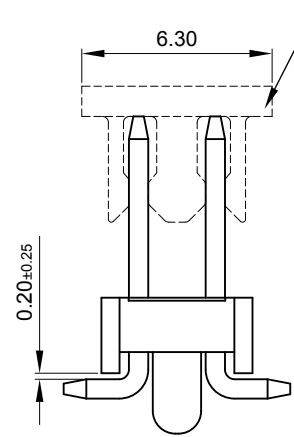
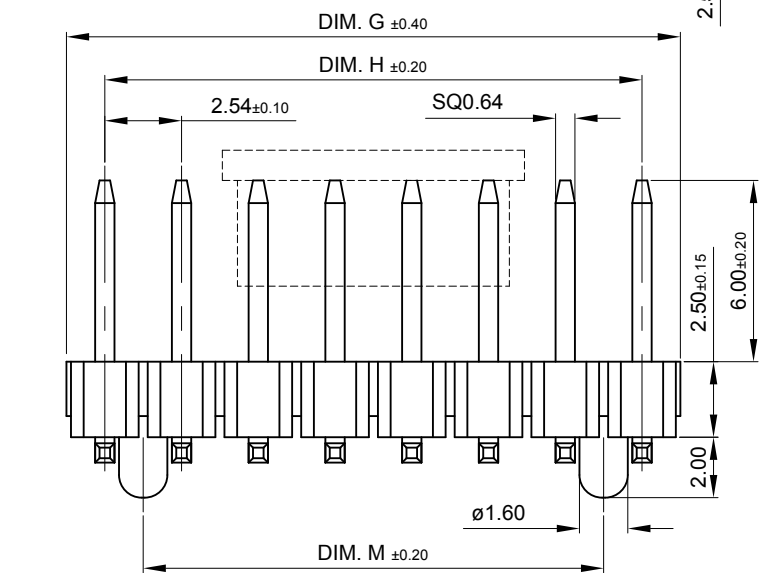


Tape & Reel packaging (with Pick and Place Cap) 300pcs per reel

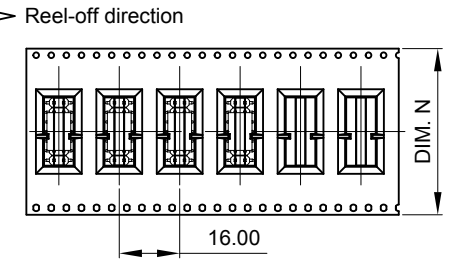

Pick and Place Cap for tape and reel packaging

Notes:

Material and finish:

Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black


Specifications:

Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

20	22
18	25
16	28
14	33
12	38
10	46
8	57
6	77
4	114
No. of positions	Q'ty per tube

129226	129217	129208	129199	20	25.40	22.86	20.32	44	10.00
129225	129216	129207	129198	18	22.86	20.32	17.78	44	10.00
129224	129215	129206	129197	16	20.32	17.78	15.24	44	10.00
129223	129214	129205	129196	14	17.78	15.24	12.70	44	10.00
129222	129213	129204	129195	12	15.24	12.70	10.16	32	10.00
129221	129212	129203	129194	10	12.70	10.16	7.62	24	10.00
129220	129211	129202	129193	8	10.16	7.62	5.08	24	7.00
129219	129210	129201	129192	6	7.62	5.08	2.54	24	7.00
129218	129209	129200	129191	4	5.08	2.54	0.00	24	7.00
Id-Nr. Tape&Reel	Id-Nr. Tube	Id-Nr. Tape&Reel	Id-Nr. Tube	No of Pos.	DIM. G	DIM. H	DIM. M	DIM. N	DIM. P
10u" gold plating	10u" gold plating	0.8u" gold plating	0.8u" gold plating						

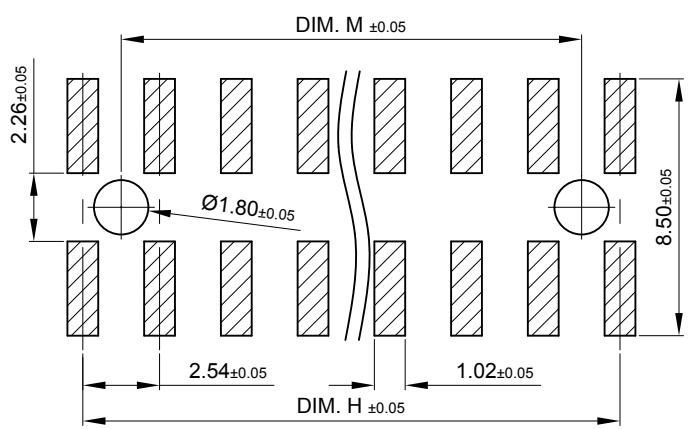

PCB Layout

Information:	Tolerances X: ±0.50 X*: ±10" X.X ±0.40 X.X*: ±5" X.XX ±0.25 X.XX*: ±5"	Scale 4:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using	Subject to modification without prior notice. Drawing will not be updated.	For further information about I. D. number see manufacturing document
ERNI Asia Holding www.erni.com		Designation 2.54mm Vertical Dual Row Header SMT with Locating Pegs 129190
Rev. -	Date 13-08-2013	Class STLHW