

CMXTVS5V6
CMXTVS6V2

**SURFACE MOUNT SILICON
QUAD TVS/ZENER ARRAY**



www.centrasemi.com



Specified by
BREAKDOWN VOLTAGE

SOT-26 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMXTVS5V6 and CMXTVS6V2 are 4-line TVS/Zener arrays packaged in a surface mount case. These devices are designed to protect sensitive electronic equipment, such as computers, networking communication, cell phones and instrumentation from over-voltage transients and ESD damage.

**MARKING CODES: CMXTVS5V6: 5V6C
CMXTVS6V2: 6V2C**

FEATURES:

- Very Low Clamping Voltage
- Low Leakage Current
- 150W Peak Power Dissipation

APPLICATIONS:

- Hand Held Portable Equipment
- Networks, Servers and Telecom
- Desktop and Notebook Computers
- Instrumentation

MAXIMUM RATINGS: (T_A=25°C)

Peak Power Dissipation (8x20µs)
Peak Power Dissipation (10x1000µs)
ESD Voltage (IEC 61000-4-2, Air)
ESD Voltage (IEC 61000-4-2, Contact)
Operating and Storage Junction Temperature

SYMBOL

P_{PK} 150
P_{PK} 24
V_{ESD} 20
V_{ESD} 15
T_J, T_{stg} -55 to +150

UNITS

W
W
kV
kV
°C

ELECTRICAL CHARACTERISTICS PER DIODE: (T_A=25°C)


Type	Breakdown Voltage			Maximum Leakage Current		Maximum Clamping Voltage (10x1000µs)		Maximum Clamping Voltage (8x20µs)		Maximum Capacitance @ 0V Bias	Maximum Capacitance @ 2.8V Bias	Maximum Impedance
	V _{BR} @ 1.0mA			I _{RWM} @ V _{RWM}		V _C @ I _{PP}		V _C @ I _{PP}		pF	pF	Ω
	MIN V	NOM V	MAX V	µA	V	V	A	V	A			
CMXTVS5V6	5.32	5.6	5.88	2.0	3.0	8.0	3.0	12	12.5	275	160	400
CMXTVS6V2	5.89	6.2	6.51	0.7	4.3	9.0	2.66	12.5	12	260	150	300

CMXTVS5V6
CMXTVS6V2


SURFACE MOUNT SILICON
QUAD TVS/ZENER ARRAY



SOT-26 CASE - MECHANICAL OUTLINE

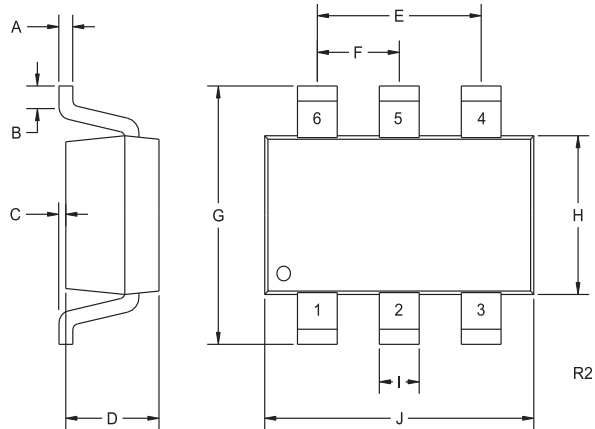

PIN CONFIGURATION



SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.11	0.19
B	0.016	-	0.40	-
C	-	0.004	-	0.10
D	0.039	0.047	1.00	1.20
E	0.074	0.075	1.88	1.92
F	0.037	0.038	0.93	0.97
G	0.102	0.118	2.60	3.00
H	0.059	0.067	1.50	1.70
I	0.016		0.41	
J	0.110	0.118	2.80	3.00

SOT-26 (REV: R2)

LEAD CODE:

- 1) Cathode D1
- 2) Anode D1, D2, D3, D4
- 3) Cathode D2
- 4) Cathode D3
- 5) Anode D1, D2, D3, D4
- 6) Cathode D4

MARKING CODES: CMXTVS5V6: 5V6C
CMXTVS6V2: 6V2C

R4 (6-April 2015)

CMXTVS5V6
CMXTVS6V2

SURFACE MOUNT SILICON
QUAD TVS/ZENER ARRAY



SERVICES

- Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/ Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

LIMITATIONS AND DAMAGES DISCLAIMER: In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R4 (6-April 2015)