

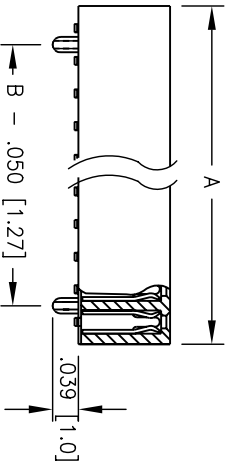
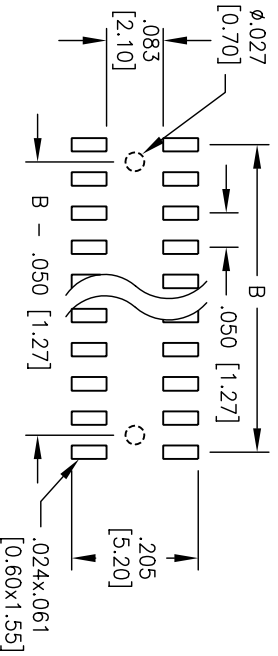


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/10/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

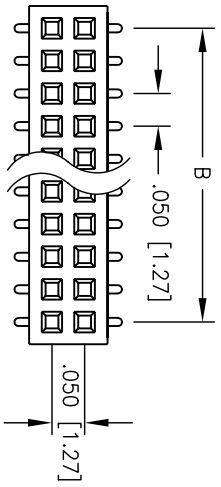

**SPECIFICATIONS:**  
 Material: Insulator: Nylon 46, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating: Gold Flash over Nickel underplate overall

A = .050 [1.27] X No. of Positions + .018 [0.46]  
 B = .050 [1.27] X No. of Spaces

Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max.  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 5000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES EXCEPT AS NOTED  
 INCHES HOLES

.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010

APPROVALS

DATE	DATE

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RECEPTACLE, DUAL ROW, .050 X .050  
 .134 [3.4] INSULATOR HEIGHT, SMT W/ PEG

DRAWN	SS	1/10/05	SIZE	PART NO.	HRS-2E-XX-G-SMT-P	REV.	-
CHECKED			X				
APPROVED			REF:	SCALE:	MKS	SHEET	1 OF 1