
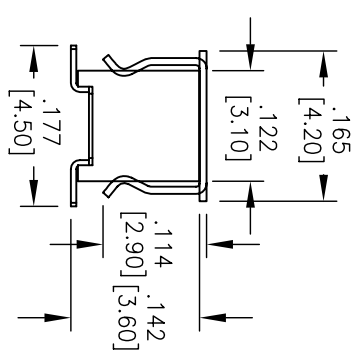
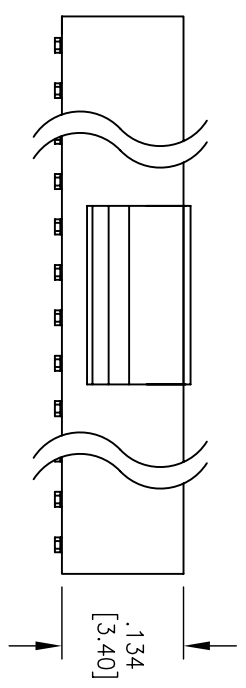
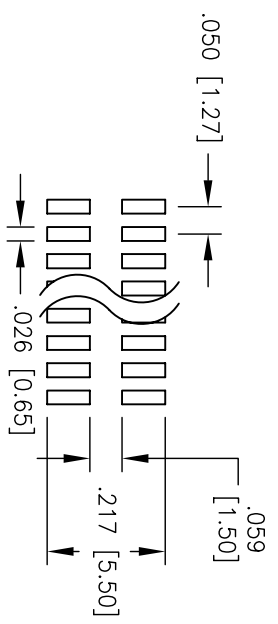


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/17/08	

APPROVED: _____
 DATE: _____ TITLE: _____

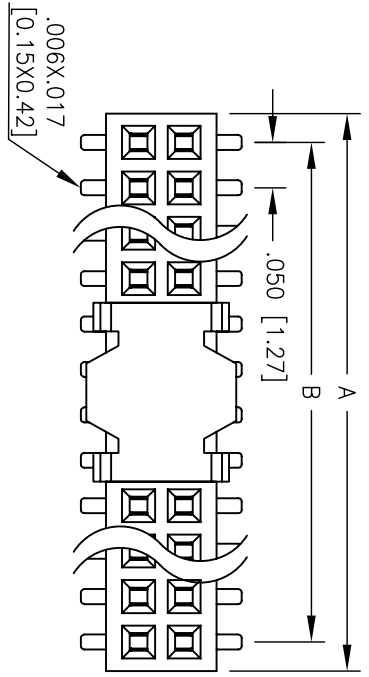

SPECIFICATIONS:

Material:
 Insulator: Nylon 46, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold Flash over nickel underplate

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260° for 5 sec.



NOTE: PACKAGED ON TAPE & REEL

A = .050 [1.27] X No. of Positions + .014 [0.35]
 B = .050 [1.27] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES			
X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	DY	7/17/08	
CHECKED			
APPROVED			

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .050" RECEPTACLE STRIP, DUAL ROW, SMT
 .134" INSULATOR HEIGHT, GOLD PLATED

SIZE	PART NO.	REV.
X	HRS-2E-XX-G-SMT-PP-TR	-

REF: SCALE: NTS SHEET 1 OF 1