

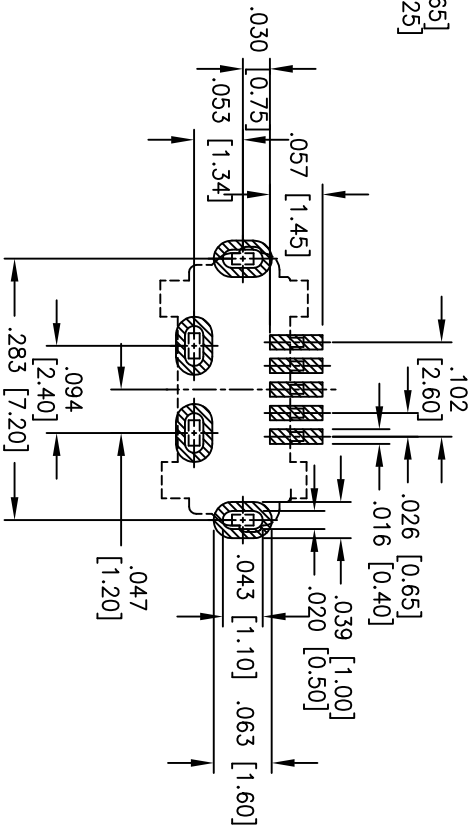
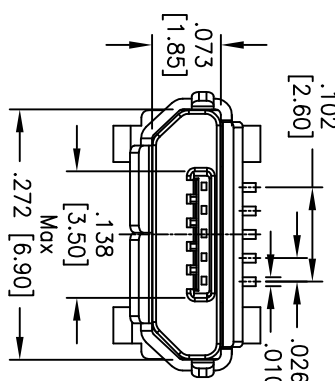
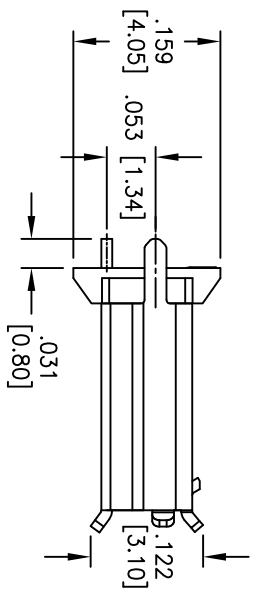


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/19/10	

APPROVED: _____ TITLE: _____
 DATE: _____

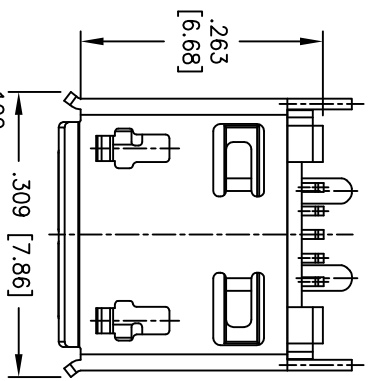

RECOMMENDED PCB LAYOUT
(TOP VIEW)

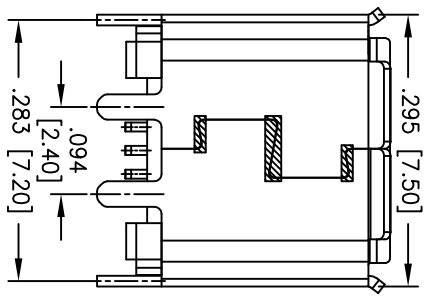

SPECIFICATIONS:
Material:
 Insulator: PA9T, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Stainless, Nickel plated
 Plating:
 Gold flash over Nickel underplate overall
Electrical:
 Current rating: 1 Amp max.
 Contact resistance: 30 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 100 VAC for 1 minute
Temperature Rating:
 Operating temperature: -30°C to +80°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN	DY	1/19/10	X	MCR-B-S-V-SMT	NTS	1	1
CHECKED							
APPROVED							