


P/N	APPLICABLE NOTE(S)							
CCSF	1, 2.1, 2.3, 2.4							
CC	1, 2.2, 2.3, 2.4							

REVISIONS								
NE	REV.	DESCRIPTION(S)	DATE	BY				
-	-		1	_				

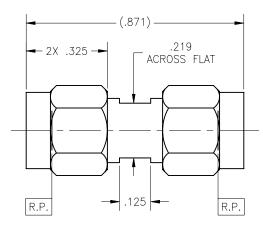

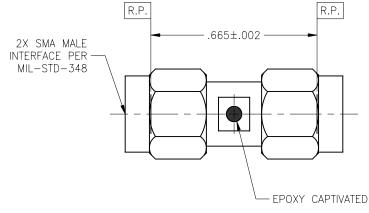



prawing no.

NOTE(S):

- MATERIAL(S):
 - 1.1 BODY AND COUPLING NUT: 303 SST PER ASTM A-582.
 - 1.2 CENTER CONDUCTOR: BRASS ALLOY PER ASTM B-16.
 - 1.3 INSULATOR PTFE PER ASTM D-1710.
 - 1.4 RETAINING RING: BeCu ALLOY PER ASTM B-197.
 - 1.5 GASKET: SILICONE RUBBER PER A-A-59588.
 - 1.6 EPOXY: SIGMA VF TYPE HV.

2. FINISH(ES):

- 2.1 BODY AND COUPLING NUT (FOR CCSF): PASSIVATE PER ASTM A-967.
- 2.2 BODY AND COUPLING NOT (FOR CC): GOLD PLATE PER ASTM B-488

 OVER NICKEL UNDERPLATE PER AMS-QQ-N-290.
- 2.3 CENTER CONDUCTOR: GOLD PLATE PER ASTM B-488 OVER NICKEL UNDERPLATE PER AMS-QQ-N-290 OVER COPPER STRIKE.
- 2.4 INSULATOR, RETAINING RING, GASKET AND EPOXY: NONE.

APPLICABLE TENSOLITE DOCUMENTS							
WORK STD	PROD INST	ASSY INST					
NA	NA	NA					
	NOTICE						

DOTICE

DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN
MATED BY TENSOUTE COMPANY AND ALL DESIGN, MANUFACTURING
MATER BY TENSOUTE COMPANY AND ALL DESIGN, MANUFACTURING
MATERIAL PROPRIETARY AND ALL DESIGN AND AL

TOLERANCES AND NOTES EXCEPT AS NOTED DIMENSIONS ARE IN INCHES.

LINEAR .XX ± .015 ANGULAR ± 1/2' .XXX ± .005 ANGULAR ± 1/2'

FRACTION ± 1/32

MACHINE FINISH: 63 RMS
 BREAK ALL SHARP EDGES .003 MAX

	SEE NOTE(S)				- SEE NOTE(S)			_					
					SIZE	SPECIFICATION			PROCUREMENT				
	NEXT ASSY		Tensolite HIGH PERFORMANCE CABLES & INTERCONNECT SYSTEMS Long Beach, California 90815										
	APPROVAL	INITIALS	DATE	TITLE	, , , , , , , , , , , , , , , , , , ,								
VE	DRAWN BY	P.MAO	04.18.05	STRAIGHT ADAPTER									
VE.	CHECKED	P.MAO	04.18.05	SCALE SUB-DIRECTORY/FILENAME									
	QUALITY			5:1		OL_\			SHEET	1	OF	1	
	ENGINEERING	P.MAO	04.18.05	SIZE	CAGE		DRAWING I	NO.					REV.
		PM	04.18.05	C	309	990			5390				