

SR160-SR1100

SCHOTTKY BARRIER RECTIFIER


Reverse Voltage 60 to 100 Volts
Forward Current – 1.0 Ampere

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

MECHANICAL DATA

- Case Molded plastic
- Epoxy UL94-0 rate flame retardant
- Lead Axial lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity Color band denotes cathode end
- Mounting position Any

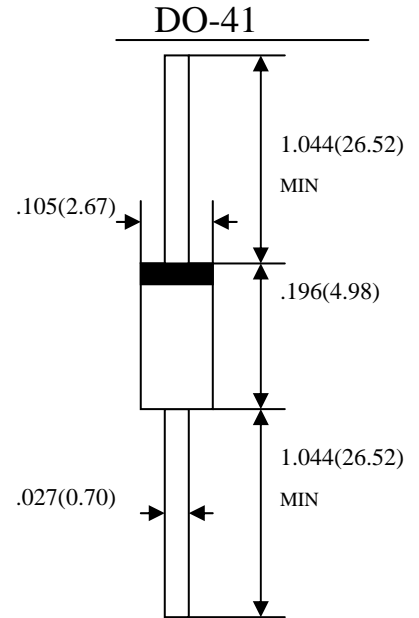

1.0 Amp Schottky Barrier Rectifier
Dimensions in inches (mm)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave, 50HZ resistive or inductive load
For capacitive load, derate by 20%)

TYPE NUMBER	Symbols	SR160	SR1100	Units
-------------	---------	-------	--------	-------