



TAI-SAW TECHNOLOGY CO., LTD.

TEL: 986 2 4600020

FAX: 986 2 4602500


TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

D. OUTLINE DRAWING:

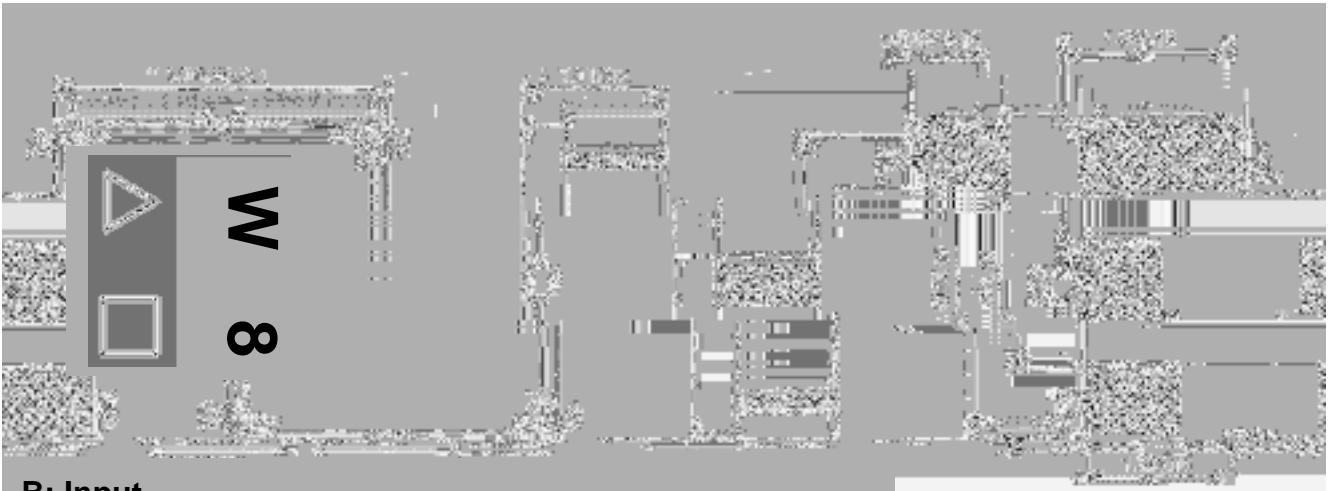

B: Input

E: Output


A, C, D, F: Ground

Unit: mm


: Year Code (2011->1, 2012->2, ..., 2019->9, 2020->0)

: Date Code

Date Code Table:

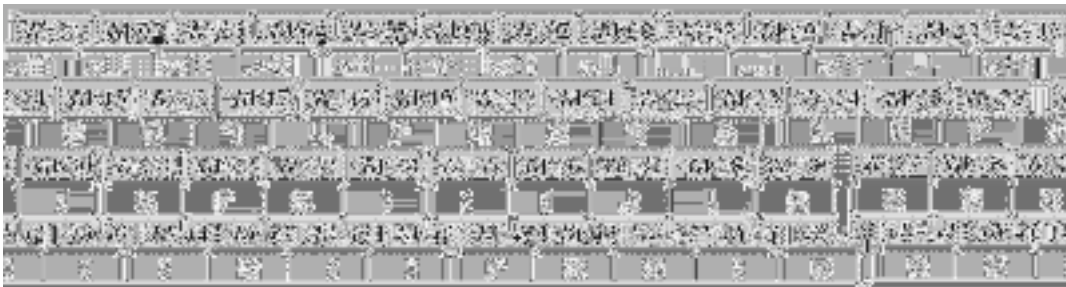

E. PCB Footprint:

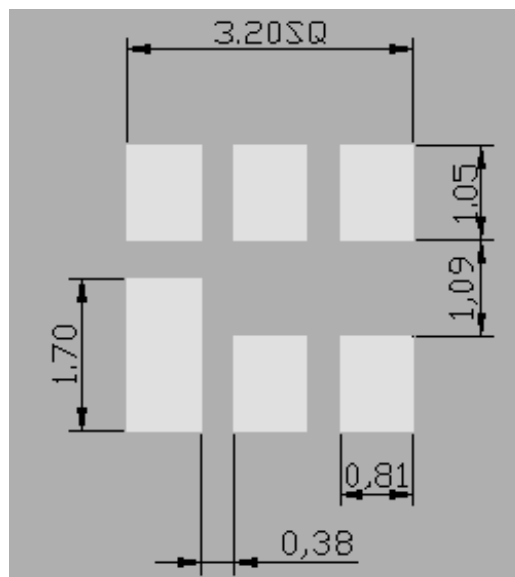

G. PACKING:

1. REEL DIMENSION

(Please refer to FR-75D10 for packing quantity)



2. TAPE DIMENSION



H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150~180 for 60~90 seconds.
2. Ascending time to preheating temperature 150 shall be 30 seconds min.
3. Heating shall be fixed at 220 for 50~80 seconds and at 250±10 peak (max. 10sec).
4. Time: 2 times.

