

Silicon PNP Power Transistors

2SB1287

DESCRIPTION

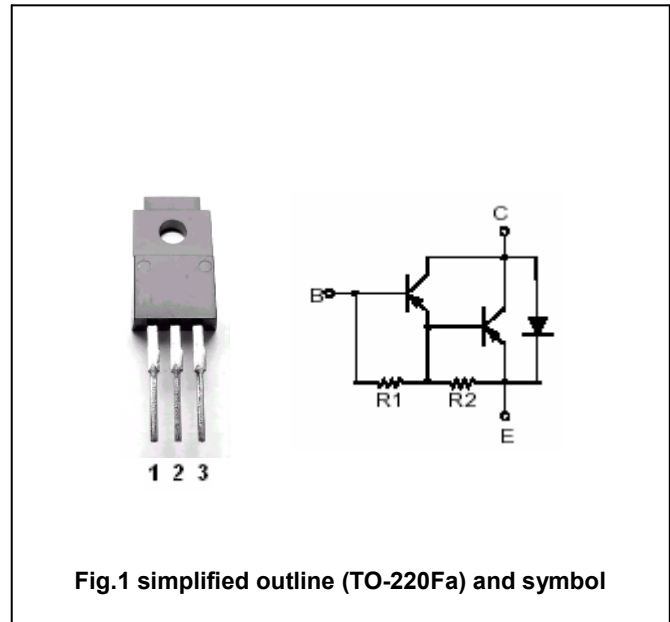
- With TO-220Fa package
- High DC current gain
- Low saturation voltage
- Complement to type 2SD1765
- DARLINGTON

APPLICATIONS

- For low frequency power amplifier and power driver applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-100	V
V_{CEO}	Collector -emitter voltage	Open base	-100	V
V_{EBO}	Emitter-base voltage	Open collector	-8	V
I_C	Collector current		-2	A
I_{CM}	Collector current-peak		-3	A
P_C	Collector power dissipation	$T_a=25^\circ\text{C}$	2	W
		$T_C=25^\circ\text{C}$	20	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SB1287

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-5mA; I _B =0	-100			V
V _{(BR)CBO}	Collector-base breakdown voltage	I _C =-50μA; I _E =0	-100			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-1A ; I _B =-1mA			-1.5	V
I _{CBO}	Collector cut-off current	V _{CB} =-100V; I _E =0			-10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-7V; I _C =0			-3.0	mA
h _{FE}	DC current gain	I _C =-1A ; V _{CE} =-2V	1000		10000	
C _{OB}	Output capacitance	I _E =0 ; V _{CB} =-10V; f=1MHz		35		pF

Silicon PNP Power Transistors

2SB1287

PACKAGE OUTLINE



Fig.2 Outline dimensions (unindicated tolerance: ± 0.15 mm)