



TO-92 Plastic-Encapsulate Transistors

79L15

CJ79L15 Three-terminal positive voltage regulator


FEATURES

Maximum Output current

I_{OM} : 100 mA

Output voltage

V_O : -15 V

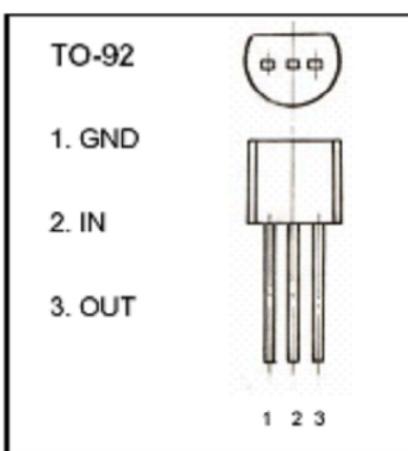

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_i	-35	V
Operating Junction Temperature Range	T_{OPR}	-20~+120	°C
Storage Temperature Range	T_{STO}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_{IS}=-23V$, $I_O=40mA$, $0^\circ C < T_j < 125^\circ C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^\circ C$	-14.4	-15	-15.6	V
		$-17.5 \leq V_i \leq -30V$, $I_o=1mA \sim 40mA$	-14.25	-15	-15.75	V
		$-17.5 \leq V_i \leq -30V$, $I_o=1mA \sim 70mA$	-14.25	-15	-15.75	V(note)
Load Regulation	ΔV_o	$T_j=25^\circ C$, $I_o=1mA \sim 100mA$, $V_i=-23V$		25	150	mV
		$T_j=25^\circ C$, $I_o=1mA \sim 40mA$, $V_i=-23V$		15	75	mV
Line regulation	ΔV_o	$-17.5 \leq V_i \leq -30V$, $T_j=25^\circ C$, $I_o=40mA$		65	300	mV
		$-20V \leq V_i \leq -30V$, $T_j=25^\circ C$, $I_o=40mA$		5	250	mV
Quiescent Current	I_q	$T_j=25^\circ C$			6.5	mA
Quiescent Current Change	ΔI_q	$-20V \leq V_i \leq -30V$, $I_o=40mA$			1.5	mA
	ΔI_q	$1mA \leq I_o \leq 40mA$, $V_i=-23V$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		90		µV
Ripple Rejection	RR	$-18.5V \leq V_i \leq -28.5V$, $f=120Hz$, $25^\circ C \leq T_j \leq 125^\circ C$	34	39		dB
Dropout Voltage	V_d	$T_j=25^\circ C$			1.7	V

TYPICAL APPLICATION

