

**C/A-413X, C/A-503XA THREE DIGITS DISPLAY**

Shape	Part No.		Chip		Wave Length $\lambda$ p(nm)	Electro-Optical Characteristics			Fig. No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Vf(V)20mA		Iv(ucd)10mA	
						Typ.	Max.	Typ.	
	C-413H	A-413H	GaP	Red	700	2.1	2.8	550	D39
	C-413E	A-413E	GaAsP/GaP	Hi. effi Red	635	2.0	2.8	1800	
	C-413G	A-413G	GaP	Green	565	2.1	2.8	1600	
	C-413Y	A-413Y	GaAsP/GaP	Yellow	585	2.1	2.8	1500	
	C-413SR	A-413SR	GaAlAs	Super Red	660	1.8	2.4	21000	
	C-503HA	A-503HA	GaP	Red	700	2.1	2.8	550	D40
	C-503EA	A-503EA	GaAsP/GaP	Hi. effi Red	635	2.0	2.8	1800	
	C-503GA	A-503GA	GaP	Green	565	2.1	2.8	1600	
	C-503YA	A-503YA	GaAsP/GaP	Yellow	585	2.1	2.8	1500	
	C-503SRA	A-503SRA	GaAlAs	Super Red	660	1.8	2.4	21000	

Fig.D39


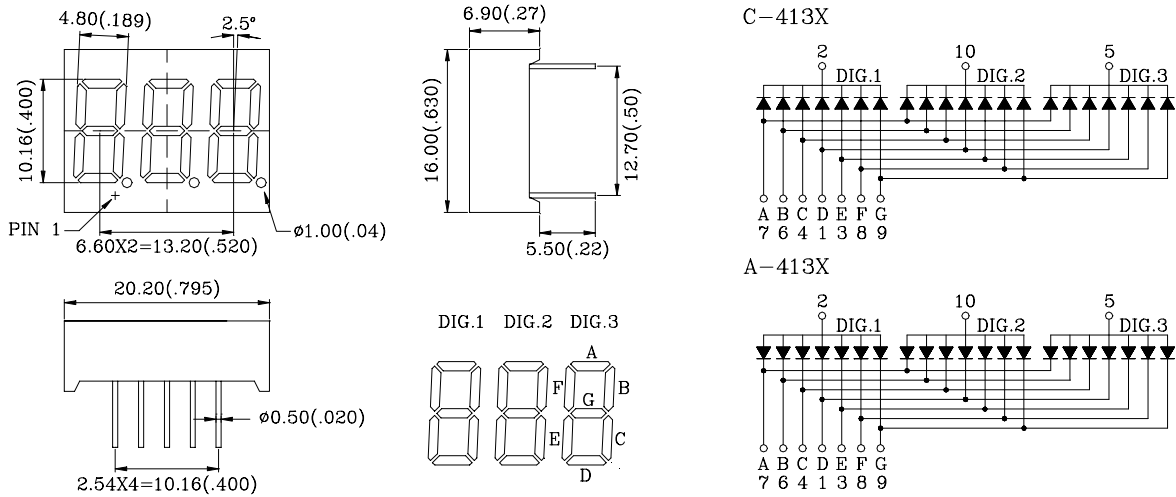


Fig.D40

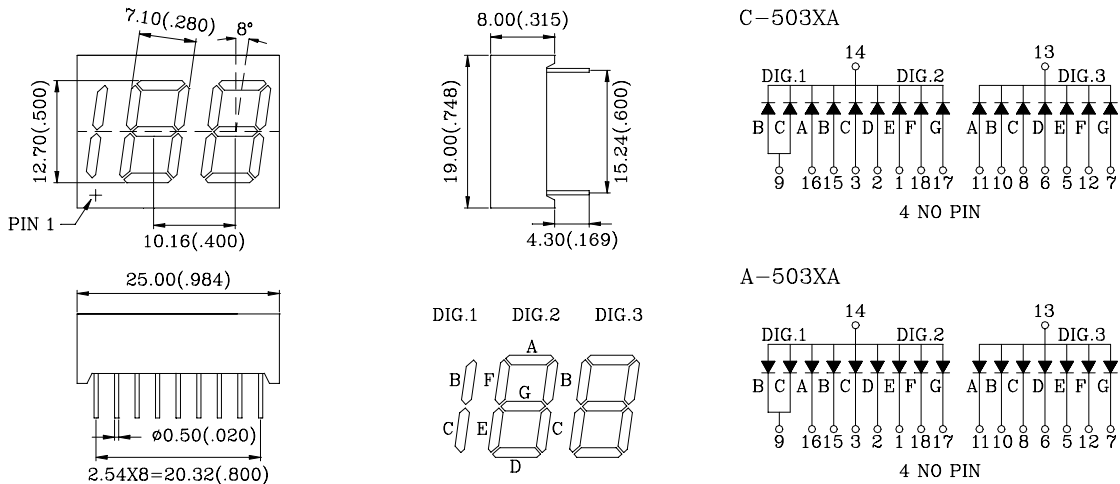

1.All dimension are in millimeters (inches).  
2.Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise specified.