


4572mm ± 76.2mm [180" ± 3"]


51mm (REF) [2" (REF.)]

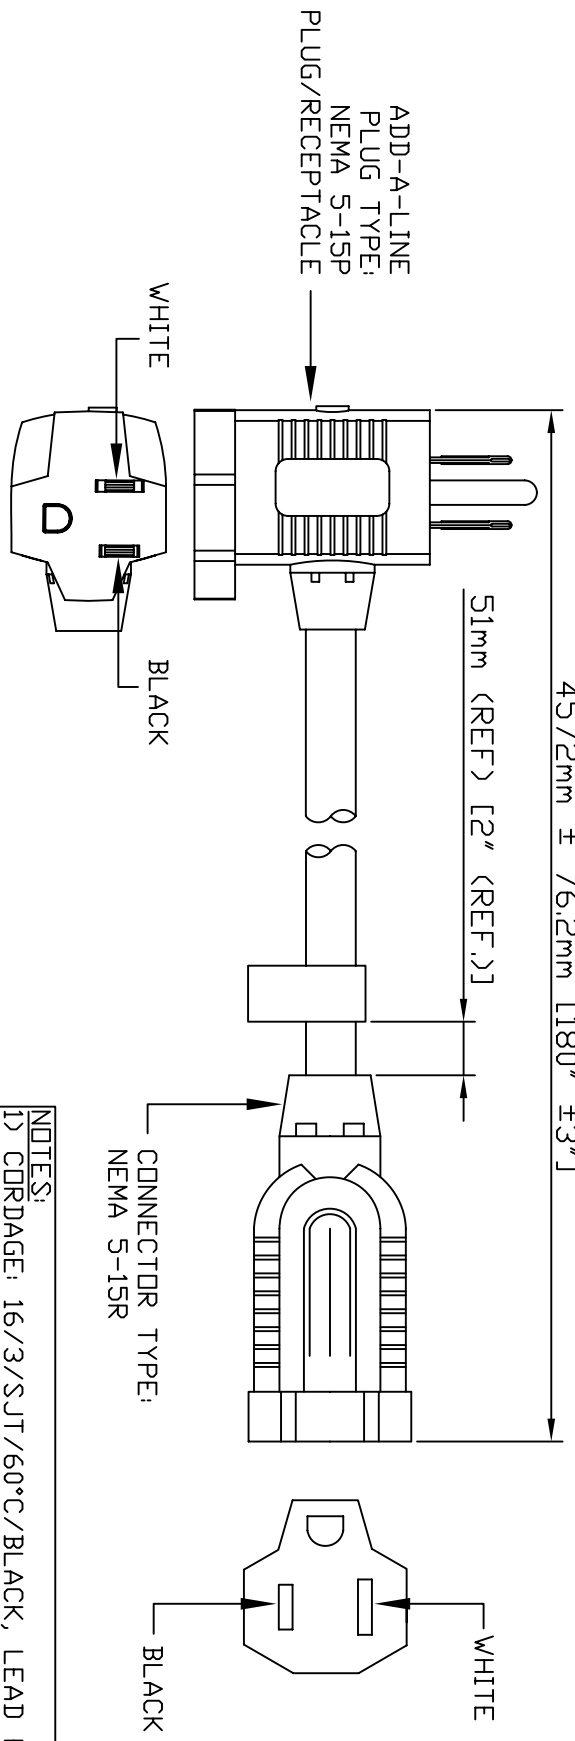

VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

PACKAGING: COIL & BAG

152.4mm ± 25.4mm O.D.
(6' ± 1' O.D.)



NOTES:
1) CORDAGE: 16/3/SJT/60°C/BLACK, LEAD FREE
2) APPROVALS: (UL) (CSA)

- 3) RATING: 13 AMP/125 VOLTS
- 4) FLAME RATING : FT2
- 5) CORDAGE D.D. : .340 (REF.)
- 6) PACKAGING: 10 BAGS/CARTON
- 7) ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED.
- 8) RESTRICTED USE DETACHABLE POWER SUPPLY CORD FOR BUSINESS, MAILING MACHINES AND ELECTRICAL EQUIPMENT THAT HAVE A BUILT IN RECEPTACLE WITH BLADES AND GROUNDING PIN FOR CORD ATTACHMENT.

REV	DESCRIPTION	DATE
1	C.U.D - NEW RELEASE	9/10/07

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.



CUD

FORM IN71-07 REV.A

- Indianapolis, IN
- Conover, N.C.
- Freemont, CA
- Aguascalientes, MX
- Tijuana, Mexico
- Hermosillo, MX
- Clinton, AR
- Kanata, Canada

MATERIAL:
PLUG: PVC, BLACK
JACKET: PVC, BLACK,
LEAD FREE

FINISH:
JACKET: SMOOTH

SCALE:	ECD:
NOT TO SCALE	N/A

ITEM DESCRIPTION	APPROVED	DRAWN BY	DATE:
CORDSET - NORTH AMERICAN DETACHABLE POWER SUPPLY CORD (15')	STC	STC	9/10/07

PART NO. 17463 10 S2

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ± .005
.XX ± .02
.X ± .03
FRACT. ± 1/32
ANGULAR ± 1/2°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Volex:](#)

[17463 10 S2](#)