

VCXO Series (PECL) PJ-A3670 Series

PRELIMINARY

Description


The **PJ-A3670 Series** of voltage controlled quartz crystal oscillators provide frequency control by applying a voltage to Pin 1. This unit supplies ECLiPS compatible outputs which are enabled when Pin 2 is set to a logic high or left open.

Features

- Frequency range—80.0MHz to 162.0MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- 3.3 volt operation
- Metal lid electrically connected to ground to reduce EMI
- Low Jitter - Wavecrest jitter characterization available
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- High frequencies due to proprietary design
- Gold plated leads - Solder dipped leads available upon request

Electrical Connection

Pin	Connection
1	V _{CO}
2	Output Enable
3	V _{EE}
4	Output
5	Output Complement
6	V _{CC}

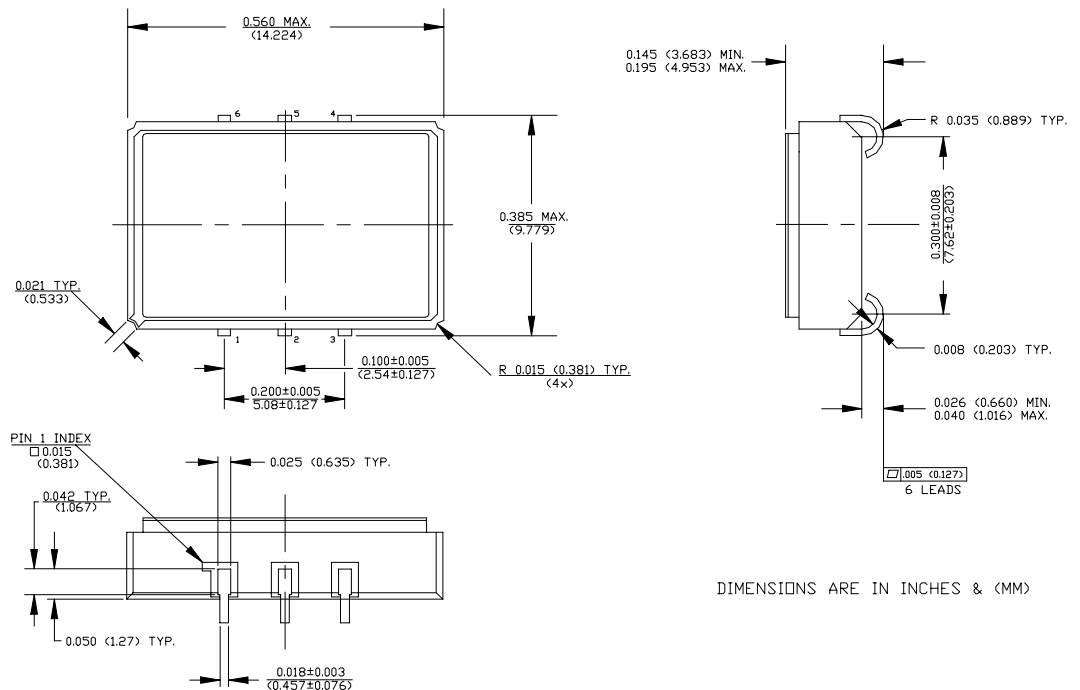

PJ-A3670 Series Continued
VCXO (PECL)

Rev. D

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	----	----	80.0MHz	----	162.0MHz
Duty Cycle	----	@ $V_o / 2$	45/55%	----	55/45%
Logic 0	V_{OL}	----	$V_{CC}-1.810V_{dc}$	----	$V_{CC}-1.620V_{dc}$
Logic 1	V_{OH}	----	$V_{CC}-1.200V_{dc}$	----	$V_{CC}-0.880V_{dc}$
Rise & Fall Time	tr,tf	20-80% V_o	----	----	600 ps
Jitter, RMS ⁽²⁾	----	----	----	3 psec	----
Pullability	----	0.3 to 3.0V	±75ppm	----	----
Vco input impedance	----	50na dc current max	100K ohm	----	----
Vco linearity	----	----	----	----	25%
Frequency Stability ⁽¹⁾	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	$V_{CC}-V_{EE}$	Nominal	3.135V	3.3V	3.465V
Supply Current	I_{CC}	----	----	----	80 mA
Output current	I_o	----	0.0 mA	----	±50.0 mA
Operating temperature	T_A	----	0°C	----	70°C
Storage temperature	T_S	----	-55°C	----	125°C
Power Dissipation	P_D	----	----	----	278 mW
Lead temperature	T_L	Soldering, 10 sec.	----	----	300°C
Load	50 Ohm to $V_{CC}-2V$ or Thevenin Equivalent, Bias Required				

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-833, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Soldering Condition	300°C for 10 seconds
Hermetic Seal	Leak rate less than 1×10^{-8} atm.cc/sec of helium

Footnotes:

- Standard frequency stability (±20,±25,±50ppm & others available)
- Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.

Creating a Part Number	
PJ - A367X - FREQ	
Package Code	Tolerance/Performance
PJ 6 J Lead SMD	0 ±100ppm 0-70°C
	1 ±50ppm 0-70°C
	7 ±25ppm 0-70°C
	9 Customer Specific
Input Voltage	A ±20ppm 0-70°C
Code Specification	B ±50ppm -40 to +85°C
A 3.3V	C ±100ppm -40 to +85°C
5V	



**FREQUENCY
CONTROLS, INC.**