
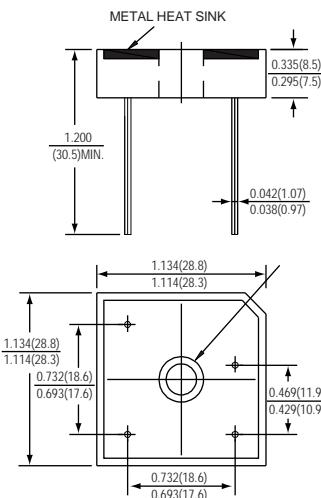


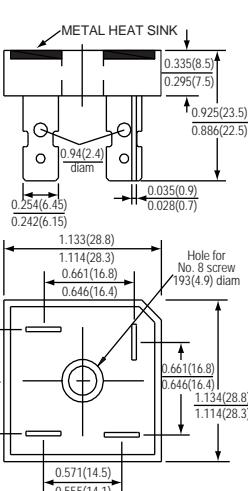

# GBPC25 AND 35 SERIES GLASS PASSIVATED BRIDGE RECTIFIER

Reverse Voltage - 200 to 1000 Volts

Forward Current - 25~35 Amperes

GBPC-W  
Wire leadsGBPC  
Standard

\*Dimensions in inches and (millimeters)

GBPC-W  
Wire leads**FEATURES**

- \* Glass passivated chip junctions
- \* Plastic Material has Underwriters Laboratory Flammability Classification 94V-0
- \* Integrally mold heatsink provides very low thermal resistance for maximum heat dissipation
- \* High forward surge current capability
- \* Universal 3-way terminals ; snap-on, wire wrap-around, or P.C.B. mounting
- \* Typical IR less than 0.3uA
- \* High temperature soldering guaranteed : 260°C/10 seconds at 5 lbs. (2.3kg) tension

**MECHANICAL DATA**

**Case :** Molded Plastic with heatsink integrally mounted in the bridge encapsulation

**Polarity :** As marked on Body

**Mounting Torque :** 20 in. -lb. max. **Weight :** 15 grams (approx)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	GBPC 25 AND 35					UNITS
		02(W)	04(W)	06(W)	08(W)	10(W)	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	1000	Volts
Maximum average forward rectified current (SEE FIG.1)	GBPC25 GBPC35	I <sub>(AV)</sub>		25 35			Amps
Peak forward surge current single half sine-wave superimposed on rated load (JEDEC Method)	GBPC25 GBPC35	I <sub>FSM</sub>		340 400			Amps
Rating (non-repetitive for greater than 1ms and less than 8.3ms) for fusing	GBPC25 GBPC35	I <sup>2</sup> t		375 660			A <sup>2</sup> s
Maximum instantaneous forward voltage drop per leg at	GBPC25 GBPC35	I <sub>F</sub> =12.5A I <sub>F</sub> =17.5A	V <sub>F</sub>		1.1		Volts
Maximum DC reverse current at rated DC blocking voltage	@ T <sub>A</sub> =25°C @ T <sub>A</sub> =125°C	I <sub>R</sub>		10 500			uA
RMA isolation voltage from case to leads	V <sub>ISO</sub>			2500			Volts
Typical Junction Capacitance per leg (NOTE 1)	C <sub>J</sub>			300			pF
Typical thermal resistance per leg (NOTE 2)	GBPC25 GBPC35	R <sub>θJC</sub>		1.9 1.4			°C / W
Operating junctionStorage temperature range	T <sub>J,TSTG</sub>			-55 to +150			°C

NOTES : (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

(2) Thermal resistance from junction to case per leg

(3) Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #10 screw

# RATINGS AND CHARACTERISTIC CURVES GBPC25 AND 35

FIG.1 - FORWARD CURRENT DERATING CURVE

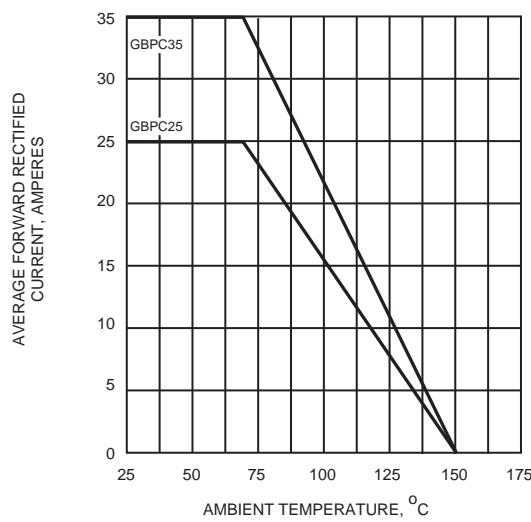


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

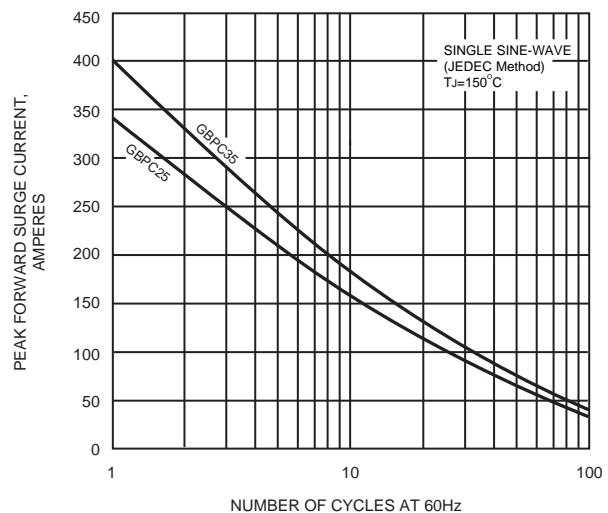


FIG.5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

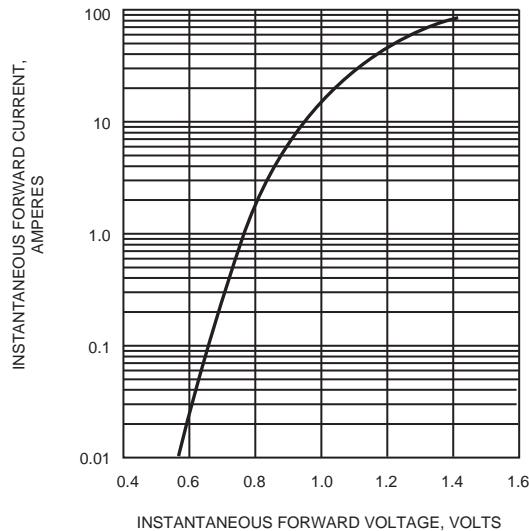


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

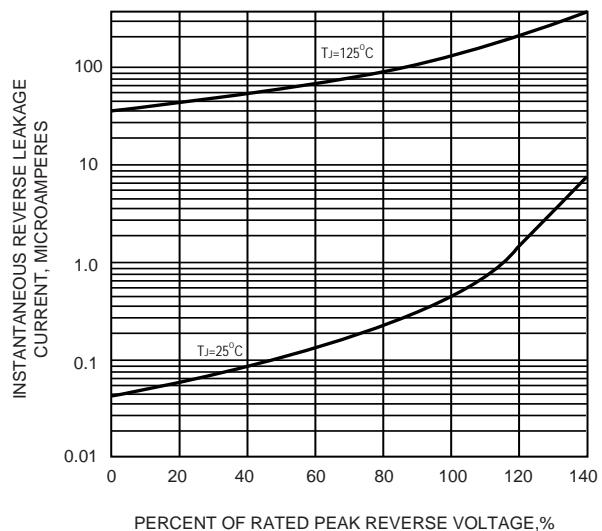


FIG.5 - TYPICAL JUNCTION CAPACITANCE

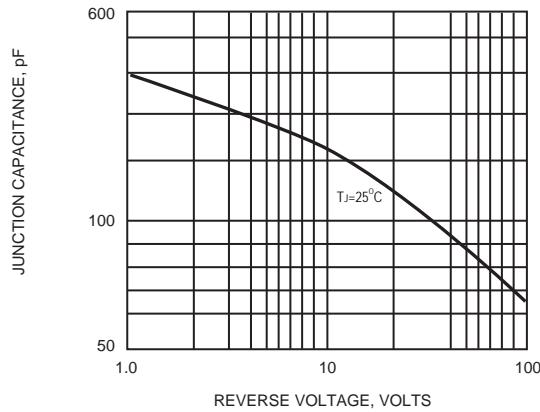


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

