



Main Product Characteristics


V_{DS}	75V
$R_{DS(on)}$	7.3m Ω (typ.)
I_D	80A ①



TO-220



Marking and Pin Assignment



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Special designed for PWM, load switching and general purpose applications
- Ultra low on-resistance with low gate charge
- Fast switching and reverse body recovery
- 175°C operating temperature
- Lead free product



Description

It utilizes the latest processing techniques to achieve the high cell density and reduces the on-resistance with high repetitive avalanche rating. These features combine to make this design an extremely efficient and reliable device for use in power switching application and a wide variety of other applications.

Absolute Max Rating

Symbol	Parameter	Max.	Units
I_D @ TC = 25°C	Continuous Drain Current, V_{GS} @ 10V	80 ①	A
I_D @ TC = 100°C	Continuous Drain Current, V_{GS} @ 10V	70 ①	
I_{DM}	Pulsed Drain Current ②	320	
P_D @ TC = 25°C	Power Dissipation ③	200	W
	Linear Derating Factor	2.0	W/°C
V_{DS}	Drain-Source Voltage	75	V
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy @ L=0.3mH	375	mJ
I_{AS}	Avalanche Current @ L=0.3mH	50	A
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 175	°C


Thermal Resistance

Symbol	Characteristics	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-case ③	—	0.75	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient ($t \leq 10\text{s}$) ④	—	62	$^{\circ}\text{C/W}$
	Junction-to-Ambient (PCB mounted, steady-state) ④	—	40	$^{\circ}\text{C/W}$

Electrical Characteristics @ $T_A=25^{\circ}\text{C}$ unless otherwise specified


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source breakdown voltage	75	—	—	V	$V_{GS} = 0\text{V}$, $I_D = 250\mu\text{A}$
$R_{DS(on)}$	Static Drain-to-Source on-resistance	—	7.3	9	$\text{m}\Omega$	$V_{GS}=10\text{V}$, $I_D = 30\text{A}$
		—	14.5	—		$T_J = 125^{\circ}\text{C}$
$V_{GS(th)}$	Gate threshold voltage	2	—	4	V	$V_{DS} = V_{GS}$, $I_D = 250\mu\text{A}$
		—	2.56	—		$T_J = 125^{\circ}\text{C}$
I_{DSS}	Drain-to-Source leakage current	—	—	1	μA	$V_{DS} = 75\text{V}$, $V_{GS} = 0\text{V}$
		—	—	50		$T_J = 125^{\circ}\text{C}$
I_{GSS}	Gate-to-Source forward leakage	—	—	100	nA	$V_{GS} = 20\text{V}$
		—	—	-100		$V_{GS} = -20\text{V}$
Q_g	Total gate charge	—	93	—	nC	$I_D = 30\text{A}$, $V_{DS}=30\text{V}$, $V_{GS} = 10\text{V}$
Q_{gs}	Gate-to-Source charge	—	36	—		
Q_{gd}	Gate-to-Drain("Miller") charge	—	29	—		
$t_{d(on)}$	Turn-on delay time	—	19	—	ns	$V_{GS}=10\text{V}$, $V_{DS}=30\text{V}$, $R_L=15\Omega$, $R_{GEN}=2.5\Omega$
t_r	Rise time	—	17	—		
$t_{d(off)}$	Turn-Off delay time	—	88	—		
t_f	Fall time	—	31	—		
C_{iss}	Input capacitance	—	6305	—	pF	$V_{GS} = 0\text{V}$
C_{oss}	Output capacitance	—	340	—		$V_{DS} = 25\text{V}$
C_{rss}	Reverse transfer capacitance	—	208	—		$f = 1\text{MHz}$

Source-Drain Ratings and Characteristics


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	80 ①	A	MOSFET symb showing the integral reverse p-n junction diode. 
I_{SM}	Pulsed Source Current (Body Diode)	—	—	320	A	
V_{SD}	Diode Forward Voltage	—	0.88	1.3	V	$I_S=30\text{A}$, $V_{GS}=0\text{V}$
t_{rr}	Reverse Recovery Time	—	45	—	ns	$T_J = 25^{\circ}\text{C}$, $I_F = 75\text{A}$, $di/dt = 100\text{A}/\mu\text{s}$
Q_{rr}	Reverse Recovery Charge	—	101	—	nC	

Test Circuits and Waveforms


EAS test circuits:

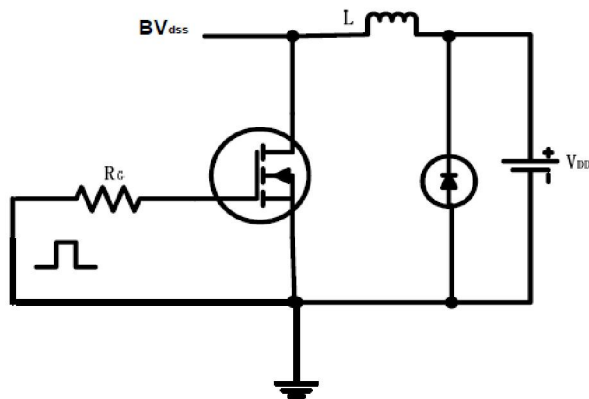


Gate charge test circuit:

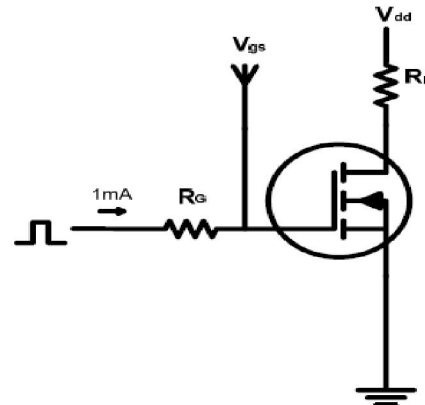

Switch Time Test Circuit:

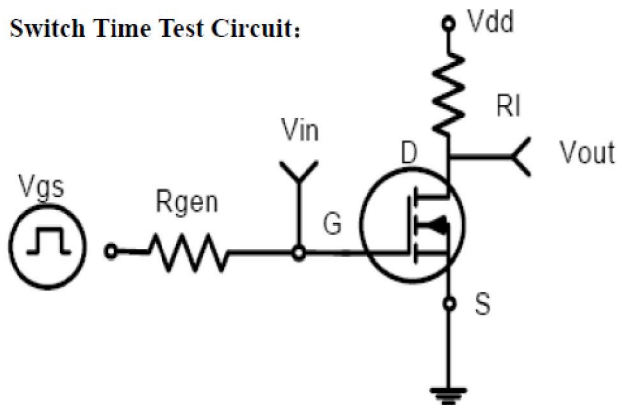

Waveforms:

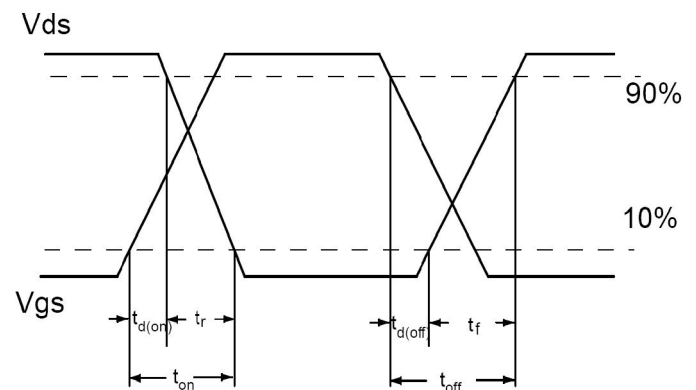

Notes:

- ① Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 75A.
- ② Repetitive rating; pulse width limited by max. junction temperature.
- ③ The power dissipation PD is based on max. junction temperature, using junction-to-case thermal resistance.
- ④ The value of $R_{\theta JA}$ is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$
- ⑤ These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)} = 175^\circ\text{C}$.

Typical Electrical and Thermal Characteristics

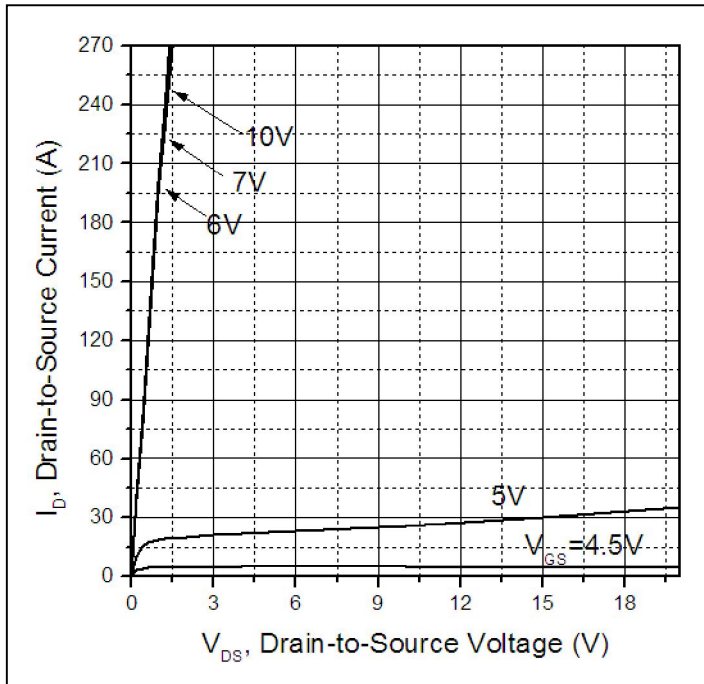


Figure 1: Typical Output Characteristics

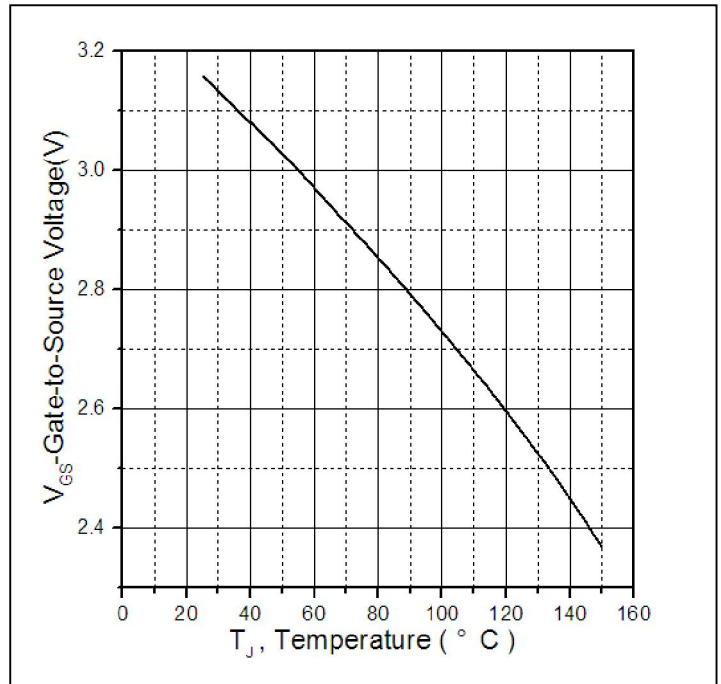


Figure 2: Gate to source cut-off voltage

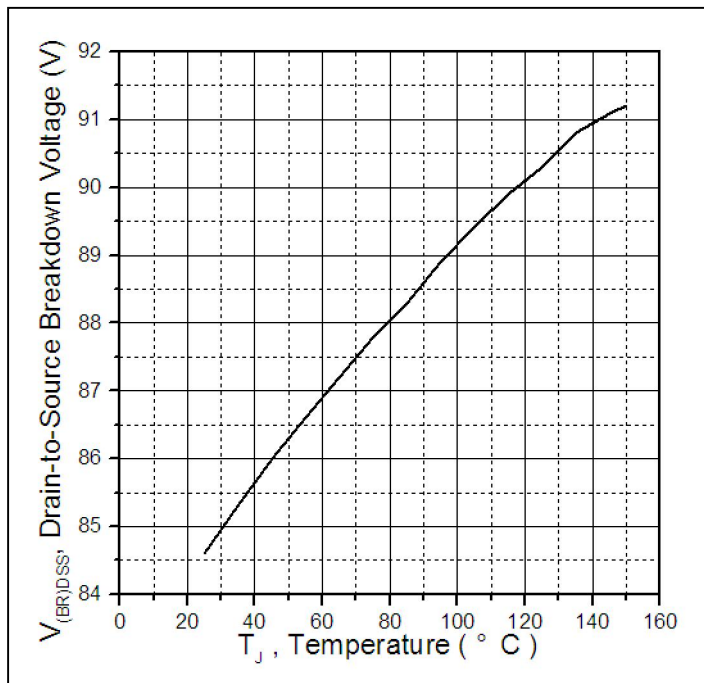


Figure 3: Drain-to-Source Breakdown Voltage vs. Temperature

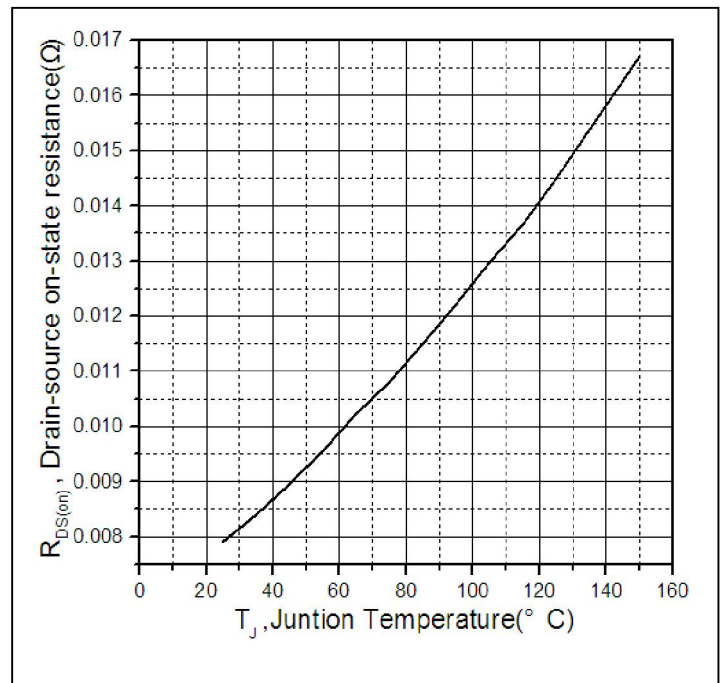


Figure 4: Normalized On-Resistance Vs. Case Temperature

Typical Electrical and Thermal Characteristics

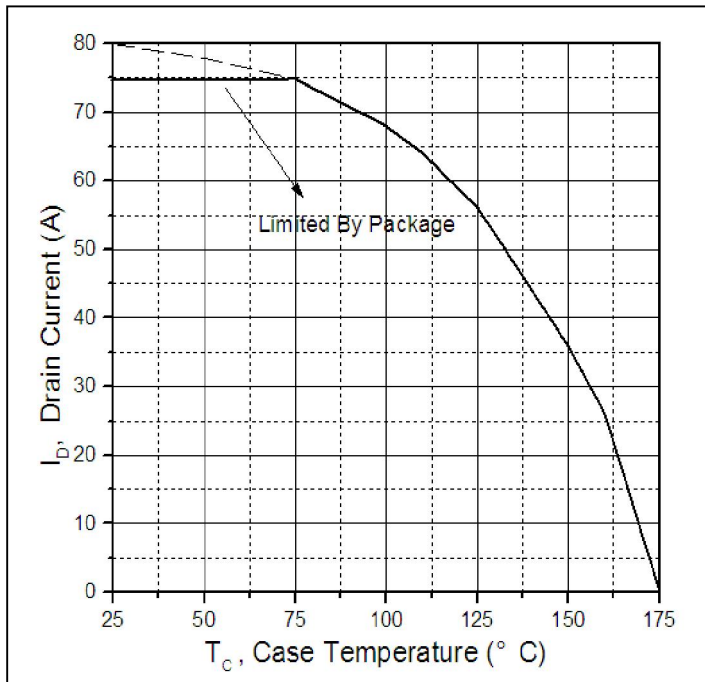


Figure 5. Maximum Drain Current Vs. Case Temperature

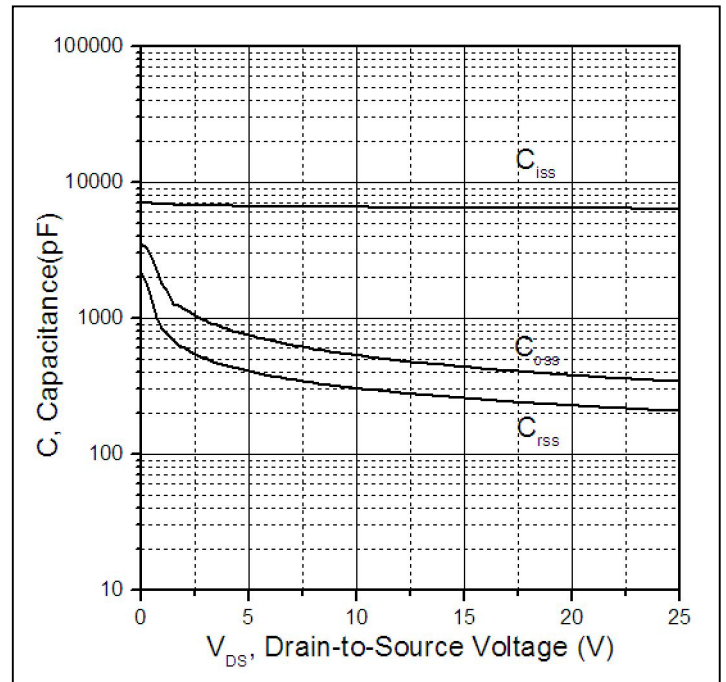


Figure 6. Typical Capacitance Vs. Drain-to-Source Voltage


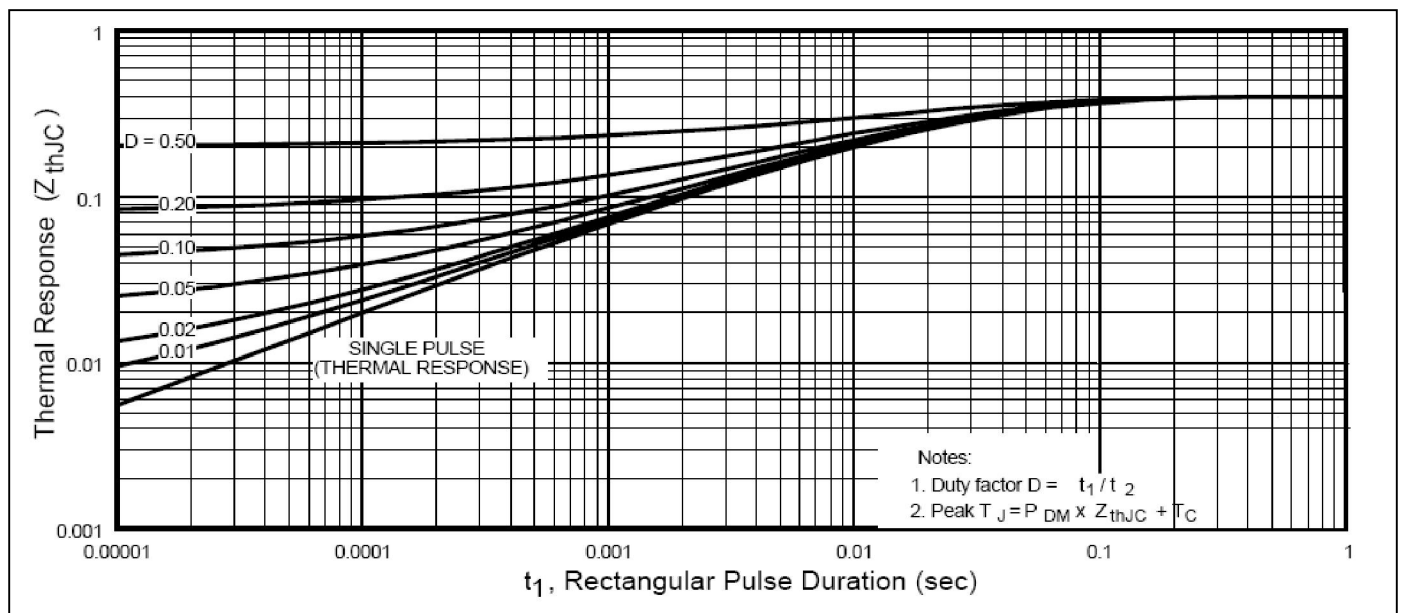


Figure7. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Mechanical Data

TO-220 PACKAGE OUTLINE DIMENSION_GN

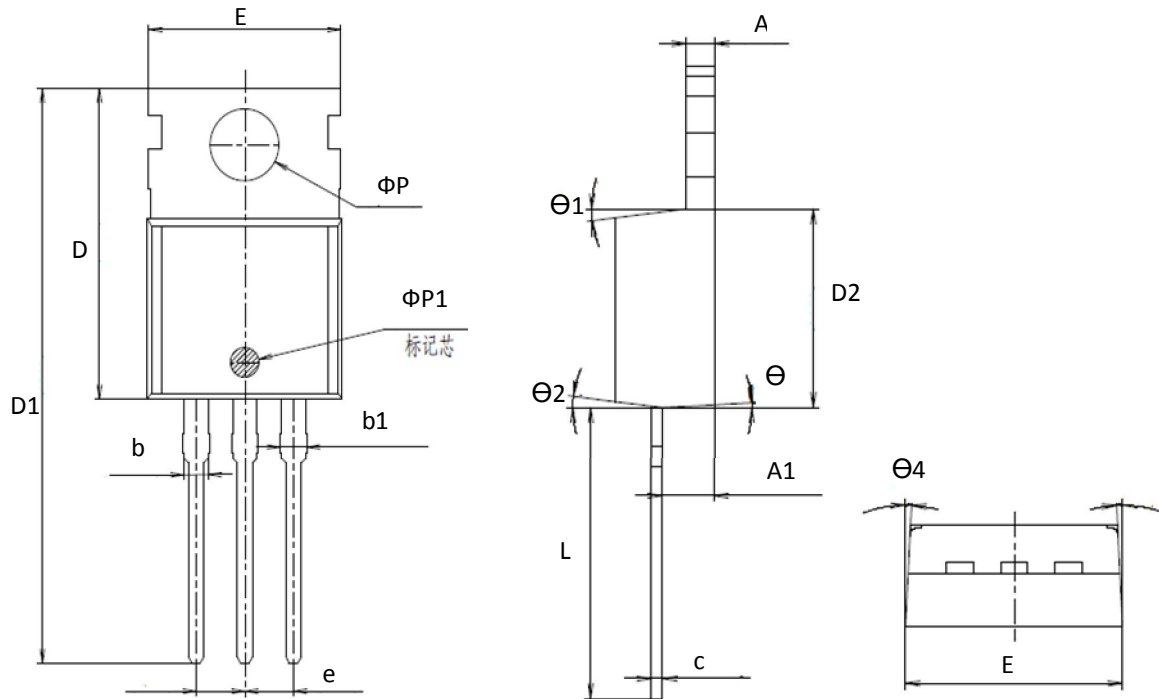

Symbol	Dimension In Millimeters			Dimension In Inches		
	Min	Nom	Max	Min	Nom	Max
A	-	1.300	-	-	0.051	-
A1	2.200	2.400	2.600	0.087	0.094	0.102
b	-	1.270	-	-	0.050	-
b1	1.270	1.370	1.470	0.050	0.054	0.058
c	-	0.500	-	-	0.020	-
D	-	15.600	-	-	0.614	-
D1	-	28.700	-	-	1.130	-
D2	-	9.150	-	-	0.360	-
E	9.900	10.000	10.100	0.390	0.394	0.398
E1	-	10.160	-	-	0.400	-
ΦP	-	3.600	-	-	0.142	-
$\Phi P1$		1.500			0.059	
e	2.54BSC			0.1BSC		
L	12.900	13.100	13.300	0.508	0.516	0.524
$\Theta 1$	-	7°	-	-	7°	-
$\Theta 2$	-	7°	-	-	7°	-
$\Theta 3$	-	3°	-	5°	7°	9°
$\Theta 4$	-	3°	-	1°	3°	5°

Ordering and Marking Information

Device Marking: SSF7609

Package (Available)
TO-220
Operating Temperature Range
C : -55 to 175 °C

Devices per Unit

Package Type	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Carton Box	Units/Carton Box
TO-220	50	20	1000	6	6000

Reliability Test Program

Test Item	Conditions	Duration	Sample Size
High Temperature Reverse Bias(HTRB)	$T_j=125^{\circ}\text{C}$ to 175°C @ 80% of Max $V_{DSS}/V_{CES}/V_R$	168 hours 500 hours 1000 hours	3 lots x 77 devices
High Temperature Gate Bias(HTGB)	$T_j=150^{\circ}\text{C}$ or 175°C @ 100% of Max V_{GSS}	168 hours 500 hours 1000 hours	3 lots x 77 devices