

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA  
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

www.centrasemi.com

<b>NPN</b>	<b>PNP</b>
<b>MPS6512</b>	<b>MPS6516</b>
<b>MPS6513</b>	<b>MPS6517</b>
<b>MPS6514</b>	<b>MPS6518</b>
<b>MPS6515</b>	<b>MPS6519</b>

**COMPLEMENTARY  
SILICON TRANSISTORS**

**JEDEC TO-92 CASE**

## DESCRIPTION

The CENTRAL SEMICONDUCTOR MPS6512 Series (NPN) and MPS6516 Series (PNP) types are molded Epoxy Silicon Small Signal Transistors designed for general-purpose amplifier applications.

## MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

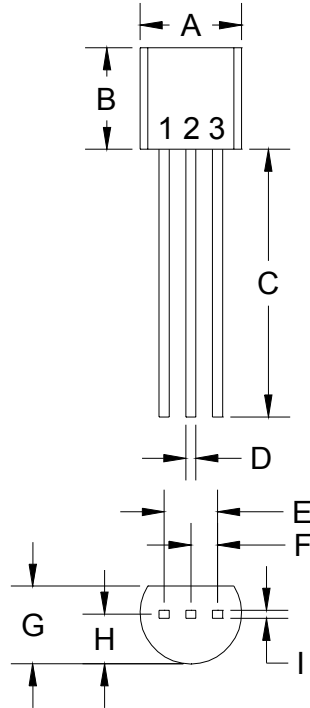
	<u>SYMBOL</u>	<u>MPS6512</u> <u>MPS6513</u>	<u>MPS6514</u> <u>MPS6515</u>	<u>MPS6516</u> <u>MPS6517</u> <u>MPS6518</u>	<u>MPS6519</u>	<u>UNITS</u>
Collector-Base Voltage	$V_{CBO}$	40	40	40	25	V
Collector-Emitter Voltage	$V_{CEO}$	30	25	40	25	V
Emitter-Base Voltage	$V_{EBO}$		4.0			V
Collector Current	$I_C$		100			mA
Power Dissipation	$P_D$		625			mW
Power Dissipation ( $T_C=25^\circ\text{C}$ )	$P_D$		1.5			W
Operating and Storage Junction Temperature	$T_J, T_{stg}$		-65 to +150			$^\circ\text{C}$
Thermal Resistance	$\theta_{JC}$		83.3			$^\circ\text{C/W}$
Thermal Resistance	$\theta_{JA}$		200			$^\circ\text{C/W}$

## ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted)

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MPS6512</u> <u>MPS6513</u> <u>MIN</u> <u>MAX</u>	<u>MPS6514</u> <u>MPS6515</u> <u>MIN</u> <u>MAX</u>	<u>MPS6516</u> <u>MPS6517</u> <u>MPS6518</u> <u>MIN</u> <u>MAX</u>	<u>MPS6519</u> <u>MIN</u> <u>MAX</u>	<u>UNITS</u>
$I_{CBO}$	$V_{CB}=30\text{V}$	50	50	50	-	nA
$I_{CBO}$	$V_{CB}=20\text{V}$	-	-	-	50	nA
$BV_{CEO}$	$I_C=0.5\text{mA}$	30	25	40	25	V
$BV_{EBO}$	$I_E=10\mu\text{A}$	4.0	4.0	4.0	4.0	V
$V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=5.0\text{mA}$	0.5	0.5	0.5	0.5	V
$C_{ob}$	$V_{CB}=10\text{V}, I_E=0, f=100\text{kHz}$	3.5	3.5	4.0	4.0	pF
<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MPS6512</u> <u>MPS6516</u> <u>MIN</u> <u>MAX</u>	<u>MPS6513</u> <u>MPS6517</u> <u>MIN</u> <u>MAX</u>	<u>MPS6514</u> <u>MPS6518</u> <u>MIN</u> <u>MAX</u>	<u>MPS6515</u> <u>MPS6519</u> <u>MIN</u> <u>MAX</u>	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=2.0\text{mA}$	50 100	90 180	150 300	250 500	
$h_{FE}$	$V_{CE}=10\text{V}, I_C=100\text{mA}$	30	60	90	150	

(Continued)

R0

TO-92 PACKAGE - MECHANICAL OUTLINE

R1

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.175	0.205	4.45	5.21
B	0.170	0.210	4.32	5.33
C	0.500	-	12.70	-
D	0.016	0.022	0.41	0.56
E	0.100		2.54	
F	0.050		1.27	
G	0.125	0.165	3.18	4.19
H	0.080	0.105	2.03	2.67
I	0.015		0.38	

TO-92 (REV: R1)

LEAD CODE

1. Emitter
2. Base
3. Collector

**Central**<sup>™</sup>  
Semiconductor Corp.

145 Adams Ave., Hauppauge, NY 11788 USA  
Phone (631) 435-1110 FAX (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

[www.centrasemi.com](http://www.centrasemi.com)