


MATERIALS

CONNECTORS	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HEAT SINK	ANODIZED ALUMINUM

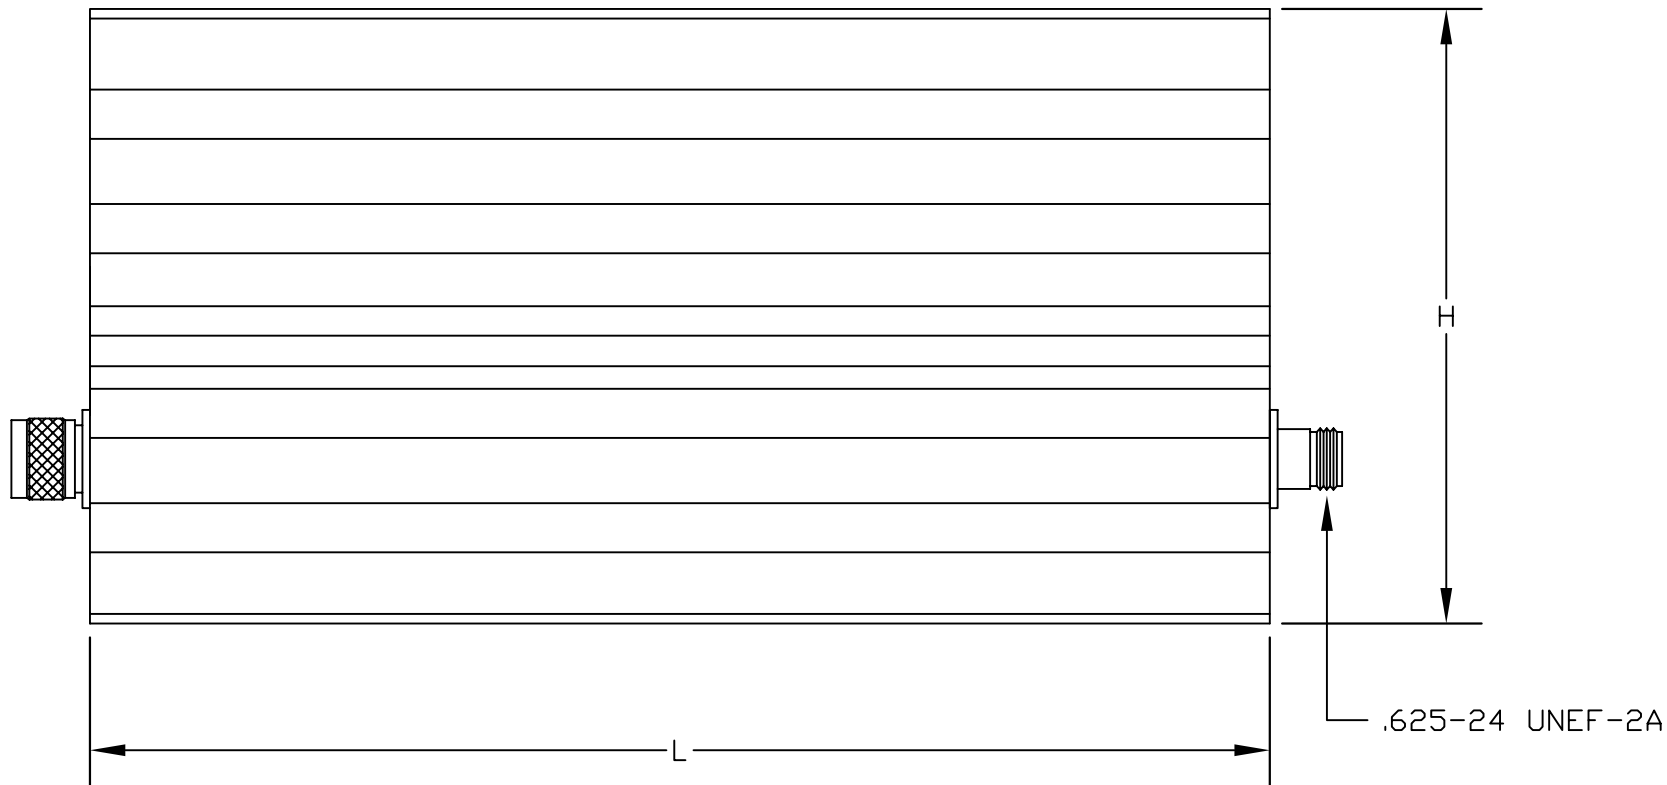

SPECIFICATIONS

FREQUENCY RANGE: DC TO 1 GHz
 ATTENUATION: 1 dB
 IMPEDANCE: 50 OHMS
 ACCURACY: ± 5 dB
 VSWR: 1.4:1 MAXIMUM
 RF INPUT POWER: 300 WATT AVERAGE AT 25°C
 DERATED TO 75 WATTS AT 85°C



PASTERNACK ENTERPRISES, INC.
 P.O BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE		DES.	
PE7031-1		N ATTENUATOR MALE TO FEMALE 300 WATT, FREQUENCY RANGE: DC TO 1 GHz	
SIZE A	FSCM NO. 53919	CAD FILE 072902	SCALE N/A
			127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.