


Radiation	Type	Electrodes
Infrared		N (cathode) up

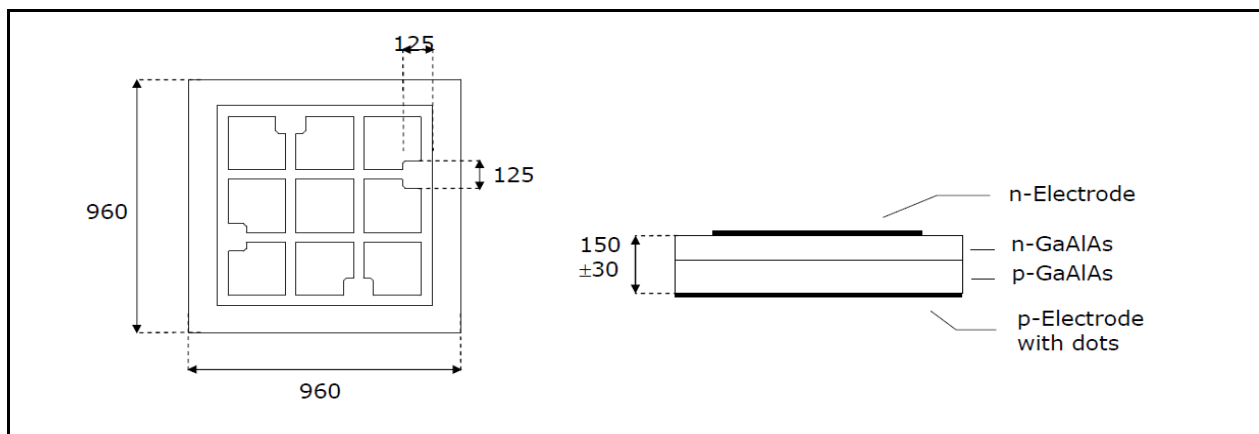

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	Vf	If=100mA	--	1.6	1.9	V
Reverse Current	Ir	Vr=5V	--	--	10	μA
Radiant Power*	Φe	If=20mA	3	4	--	mW
Switching Time	tr, tf	If=100mA	--	40	--	ns
Peak Wavelength	λp	If=100mA	790	800	810	nm
Spectral Bandwidth at 50%	Δλ0.5	If=100mA	--	29	--	nm

* Measured on gold plate

Absolute Maximum Ratings (Ta = 25°C)

ITEMS	SYMBOL	RATINGS	UNIT
Forward DC Current	If	500	mA



We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.