

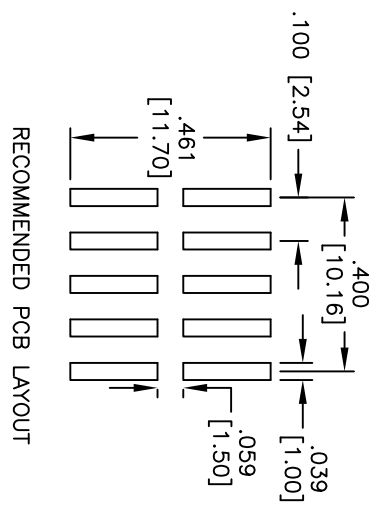
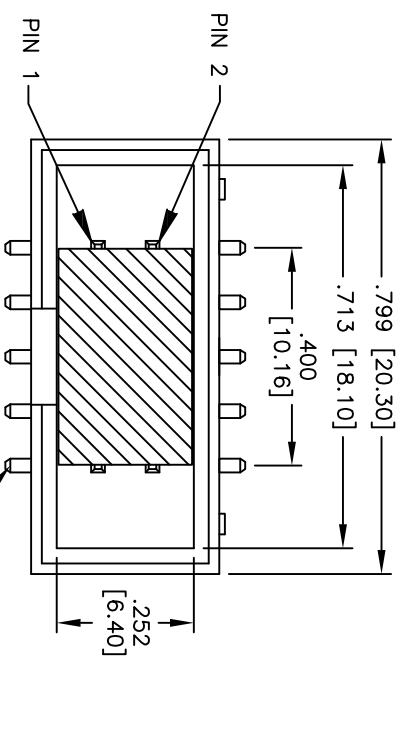


Rev	AWO #	Description	Date	Appr
-	10869	RELEASED	11/26/10	

APPROVED: _____
 DATE: _____ TITLE: _____

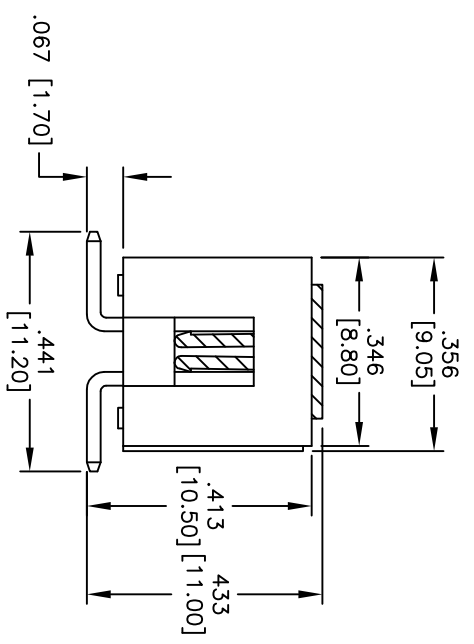

RECOMMENDED PCB LAYOUT

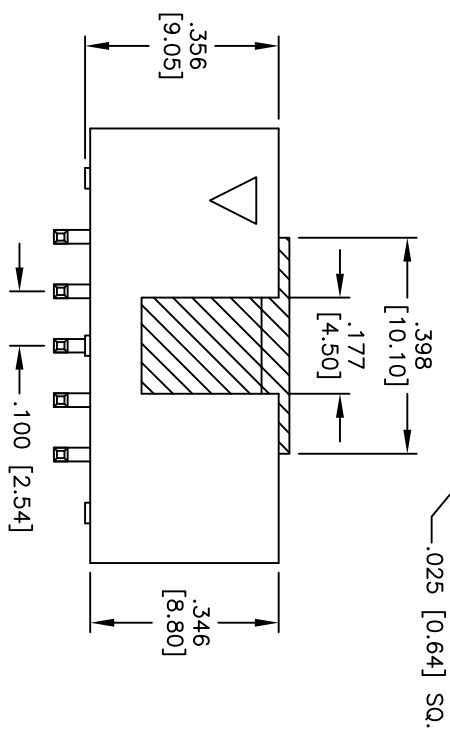

SPECIFICATIONS:

- Material: HI-temp thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.
- Electrical:
 - Current rating: 3 Amps max
 - Contact resistance: 20 mohms max
 - Insulation resistance: 5000 Mohms min
 - Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN	DATE
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **BOX HEADER, VERTICAL, SMT TYPE**
 SEL GOLD PLATED

SIZE	PART NO.	REV.
X	BHR-10-VSGA-SMT-PP-TR-11.18	-
REF: S0059T	SCALE: NTS	SHEET 1 OF 1

