



## Metallized Polypropylene Film Capacitor AC Filtering Radial Type



### FEATURES

- High peak current capabilities
- Long lifetime
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
**GREEN**  
(5-2008)

### APPLICATIONS

- AC filtering
- UPS systems
- Renewable energy - grid interface
- Harmonic filter
- Welding equipment


| QUICK REFERENCE DATA                                     |  |
|--|--|
| Rated capacitance range                                  | 1 µF to 70 µF  |
| Capacitance tolerance                                    | ± 5 % and 10 %   |
| AC voltage range, U <sub>N</sub>                         | 230 V <sub>AC</sub> , 250 V <sub>AC</sub> , 275 V <sub>AC</sub> , 310 V <sub>AC</sub> , 350 V <sub>AC</sub> , 440 V <sub>AC</sub>  |
| Climatic testing class                                   | 40/85/56   |
| Maximum application temperature                          | 105 °C   |
| Maximum permissible case temperature                     | 105 °C   |
| Reference standards                                      | IEC 61071, IEC 60068   |
| Dielectric   | Polypropylene film   |
| Electrodes   | Metallized dielectric film   |
| Construction   | Mono and internal serial construction  |
| Encapsulation  | Plastic case sealed with resin; flame retardant  |
| Terminals  | Tinned wire  |
| Self inductance (L <sub>S</sub> )                        | < 1 nH per mm of lead spacing  |
| Withstanding DC voltage between terminals <sup>(1)</sup> | 1.5 U <sub>NDC</sub> for 10 s, cut off current 10 mA, rise time ≤ 1000 V/s   |
| Insulation resistance                                    | RC between leads, after 1 min > 10 000 s<br>Measuring voltage: 500 V   |
| Life time expectancy                                     | Useful lifetime: > 60 000 h at U <sub>N</sub><br>FIT: < 10 x 10 <sup>-9</sup> /h (10 per 10 <sup>9</sup> component hours) at 0.5 x U <sub>N</sub> , 40 °C  |
| Marking  | C-value; tolerance; rated voltage; code for dielectric material; code for manufacturing origin; manufacturer's type designation; manufacturer location, year and week; manufacturer's logo or name |

### Notes

- For more detailed data and test requirements, contact [dc-film@vishay.com](mailto:dc-film@vishay.com)
- For general information like characteristics and definitions used for film capacitors follow the link: [www.vishay.com/doc?28147](http://www.vishay.com/doc?28147)
- <sup>(1)</sup> See document "Voltage Proof Test for Metallized Capacitors" ([www.vishay.com/doc?28169](http://www.vishay.com/doc?28169))


| AC VOLTAGE RATINGS (V <sub>RMS</sub> ) |       |       |       |       |       |       |
|--|-------|-------|-------|-------|-------|-------|
| U <sub>N</sub>                         | 230 V | 250 V | 275 V | 310 V | 350 V | 440 V |
| V <sub>RMS</sub> at 85 °C              | 230 V | 250 V | 275 V | 310 V | 350 V | 440 V |
| V <sub>RMS</sub> at 105 °C             | 160 V | 175 V | 190 V | 210 V | 240 V | 300 V |

## COMPOSITION OF CATALOG NUMBER

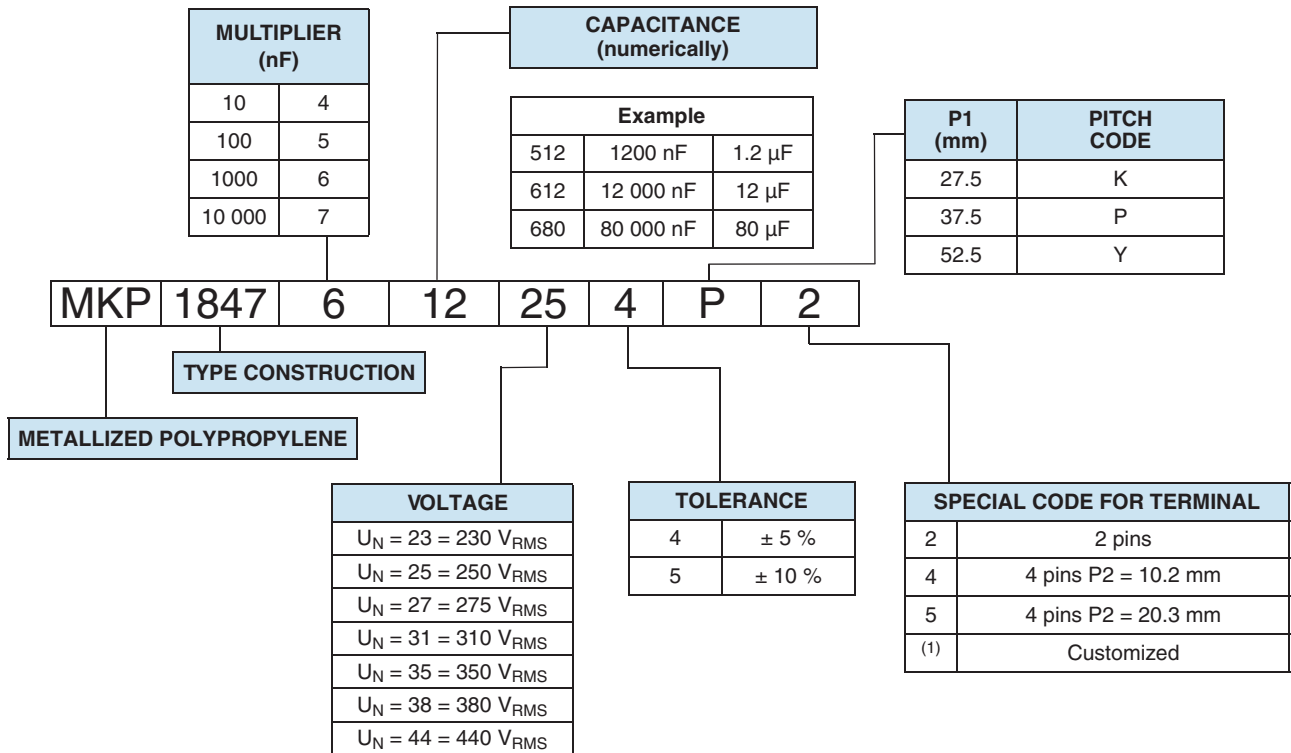

**Note**

(1) Tabs terminals or customized terminals are available on request

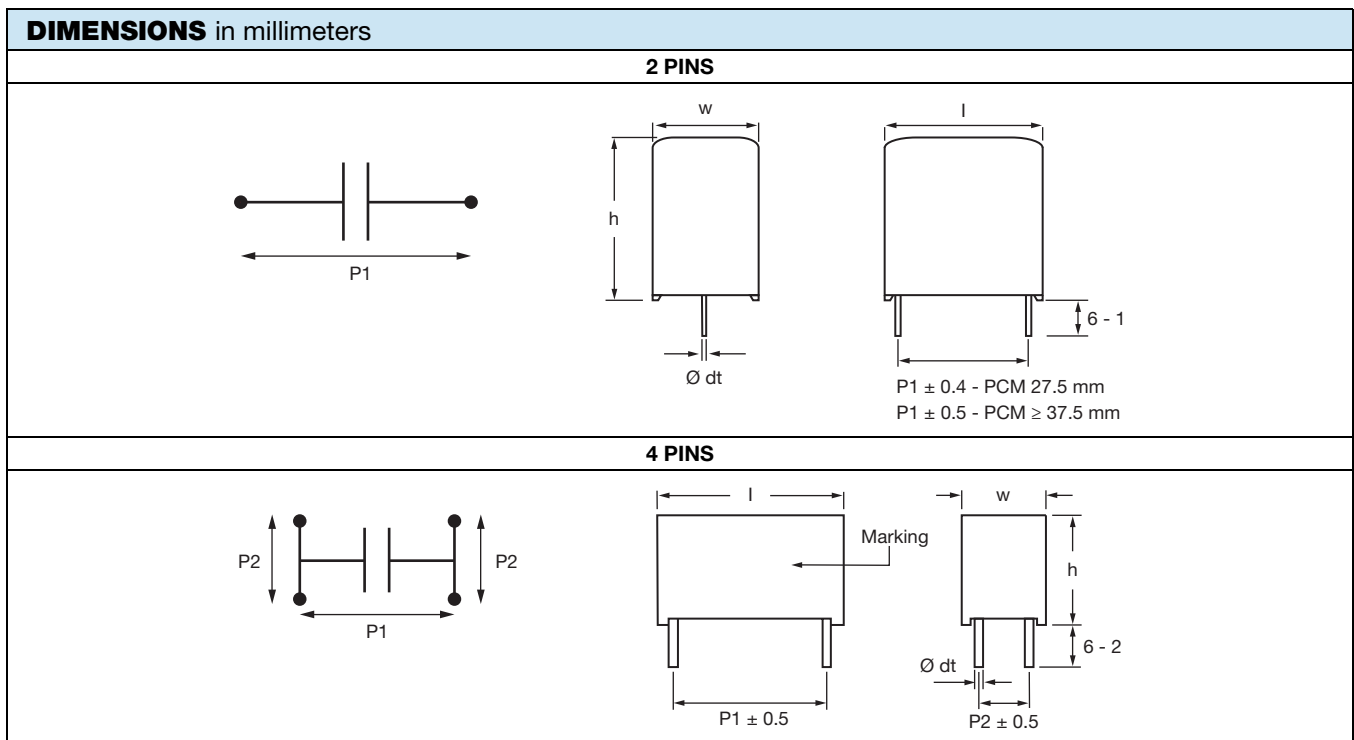

**Note**

- $\varnothing dt \pm 10\%$  of standard diameter specified



| ELECTRICAL DATA AND ORDERING CODE   |                  |                       |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
|---|------------------|-----------------------|------|------|------------|-------------|---------------------|--------------------------|-----------------------------|-----------|---|-----------|--|-----------------|-------------------|
| U <sub>RAC</sub><br>(V)   | CAP. (1)<br>(μF) | DIMENSION (2)<br>(mm) |      |      | P1<br>(mm) | P2<br>(mm)  | dV/dt (3)<br>(V/μs) | I <sub>PEAK</sub><br>(A) | I <sub>RMS</sub> (4)<br>(A) |           | tan δ<br>1 kHz<br>(< 10 <sup>-4</sup> ) (5) |           | tan δ<br>10 kHz<br>(< 10 <sup>-4</sup> ) (5) |                 | ORDERING CODE (6) |
|   |                  | w                     | h    | l    |            |             |                     |                          | 2<br>PINS                   | 4<br>PINS | 2<br>PINS                                   | 4<br>PINS | 2<br>PINS                                    | 4<br>PINS       |                   |
|   |                  |                       |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
| <b>U<sub>NDC</sub> = 450 V; U<sub>RMS</sub> AT 85 °C = 230 V<sub>AC</sub>; U<sub>RMS</sub> AT 105 °C = 160 V<sub>AC</sub></b> |                  |                       |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
| 230   | 1                | 9.0                   | 19.0 | 32.0 | 27.5       | -           | 45                  | 45                       | 2.5                         | -         | 5   | -         | 30   | -               | MKP1847510234K2   |
|   | 2                | 11.0                  | 21.0 | 32.0 | 27.5       | -           | 45                  | 90                       | 3.5                         | -         | 5   | -         | 30   | -               | MKP1847520234K2   |
|   | 3                | 13.0                  | 23.0 | 32.0 | 27.5       | -           | 45                  | 135                      | 5.0                         | -         | 5   | -         | 30   | -               | MKP1847530234K2   |
|   | 4                | 15.0                  | 25.0 | 32.0 | 27.5       | -           | 45                  | 180                      | 6.0                         | -         | 5   | -         | 30   | -               | MKP1847540234K2   |
|   | 5                | 18.0                  | 28.0 | 32.0 | 27.5       | -           | 45                  | 225                      | 7.5                         | -         | 5   | -         | 30   | -               | MKP1847550234K2   |
|   | 6                | 18.0                  | 28.0 | 32.0 | 27.5       | -           | 45                  | 270                      | 8.0                         | -         | 5   | -         | 30   | -               | MKP1847560234K2   |
|   | 7                | 18.0                  | 28.0 | 32.0 | 27.5       | -           | 45                  | 315                      | 8.5                         | -         | 5   | -         | 30   | -               | MKP1847570234K2   |
|   | 8                | 21.0                  | 31.0 | 32.0 | 27.5       | -           | 45                  | 360                      | 10.0                        | -         | 5   | -         | 30   | -               | MKP1847580234K2   |
|   | 9                | 21.0                  | 31.0 | 32.0 | 27.5       | -           | 45                  | 405                      | 10.5                        | -         | 5   | -         | 30   | -               | MKP1847590234K2   |
|   | 10               | 20.0                  | 35.0 | 32.0 | 27.5       | -           | 45                  | 450                      | 11.5                        | -         | 5   | -         | 30   | -               | MKP1847610234K2   |
|   | 10               | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 20                  | 200                      | 8.0                         | 9.0       | 10  | 8         | 75   | 70              | MKP1847610234P*   |
|   | 12               | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 20                  | 240                      | 9.0                         | 10.0      | 10  | 8         | 75   | 70              | MKP1847612234P*   |
|   | 15               | 21.5                  | 38.5 | 43.0 | 37.5       | 10.2        | 20                  | 300                      | 11.0                        | 12.0      | 10  | 8         | 75   | 70              | MKP1847615234P*   |
|   | 20               | 24.0                  | 44.0 | 42.0 | 37.5       | 10.2        | 20                  | 400                      | 13.5                        | 14.5      | 10  | 8         | 75   | 70              | MKP1847620234P*   |
|   | 22               | 24.0                  | 44.0 | 42.0 | 37.5       | 10.2        | 20                  | 440                      | 14.0                        | 15.5      | 10  | 8         | 75   | 70              | MKP1847622234P*   |
|   | 25               | 30.0                  | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 20                  | 500                      | 16.0                        | 17.5      | 10  | 8         | 75   | 70              | MKP1847625234P*   |
|   | 30               | 30.0                  | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 20                  | 600                      | 17.5                        | 19.0      | 10  | 8         | 75   | 70              | MKP1847630234P*   |
|   | 30               | 25.0                  | 45.0 | 57.5 | 52.5       | 10.2        | 10                  | 300                      | 13.5                        | 15.0      | 20  | 17        | 150  | 135             | MKP1847630234Y*   |
|   | 35               | 25.0                  | 45.0 | 57.5 | 52.5       | 10.2        | 10                  | 350                      | 14.5                        | 16.0      | 20  | 17        | 150  | 135             | MKP1847635234Y*   |
|   | 40               | 30.0                  | 45.0 | 57.5 | 52.5       | 20.3        | 10                  | 400                      | 16.5                        | 18.0      | 20  | 17        | 150  | 135             | MKP1847640234Y*   |
| 45  | 30.0             | 45.0                  | 57.5 | 52.5 | 20.3       | 10          | 450                 | 17.5                     | 19.0                        | 20        | 17  | 150       | 135  | MKP1847645234Y* |                   |
| 50  | 35.0             | 50.0                  | 57.5 | 52.5 | 20.3       | 10          | 500                 | 20.0                     | 21.5                        | 20        | 17  | 150       | 135  | MKP1847650234Y* |                   |
| 55  | 35.0             | 50.0                  | 57.5 | 52.5 | 20.3       | 10          | 550                 | 21.0                     | 22.5                        | 20        | 17  | 150       | 135  | MKP1847655234Y* |                   |
| 60  | 35.0             | 50.0                  | 57.5 | 52.5 | 20.3       | 10          | 600                 | 21.5                     | 23.5                        | 20        | 17  | 150       | 135  | MKP1847660234Y* |                   |
| 65  | 45.0             | 45.0                  | 57.5 | 52.5 | 20.3       | 10          | 650                 | -                        | 25.5                        | -         | 17  | -         | 135  | MKP1847665234Y5 |                   |
| 70  | 45.0             | 45.0                  | 57.5 | 52.5 | 20.3       | 10          | 700                 | -                        | 26.0                        | -         | 17  | -         | 135  | MKP1847670235Y5 |                   |
| <b>U<sub>NDC</sub> = 500 V; U<sub>RMS</sub> AT 85 °C = 250 V<sub>AC</sub>; U<sub>RMS</sub> AT 105 °C = 175 V<sub>AC</sub></b> |                  |                       |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
| 250   | 1                | 9.0                   | 19.0 | 32.0 | 27.5       | -           | 50                  | 50                       | 2.5                         | -         | 5   | -         | 25   | -               | MKP1847510254K2   |
|   | 2                | 11.0                  | 21.0 | 32.0 | 27.5       | -           | 50                  | 100                      | 4                           | -         | 5   | -         | 25   | -               | MKP1847520254K2   |
|   | 3                | 13.0                  | 23.0 | 32.0 | 27.5       | -           | 50                  | 150                      | 5                           | -         | 5   | -         | 25   | -               | MKP1847530254K2   |
|   | 4                | 15.0                  | 25.0 | 32.0 | 27.5       | -           | 50                  | 200                      | 6                           | -         | 5   | -         | 25   | -               | MKP1847540254K2   |
|   | 5                | 18.0                  | 28.0 | 32.0 | 27.5       | -           | 50                  | 250                      | 7                           | -         | 5   | -         | 25   | -               | MKP1847550254K2   |
|   | 6                | 18.0                  | 28.0 | 32.0 | 27.5       | -           | 50                  | 300                      | 6                           | -         | 5   | -         | 25   | -               | MKP1847560254K2   |
|   | 7                | 21.0                  | 31.0 | 32.0 | 27.5       | -           | 50                  | 350                      | 8                           | -         | 5   | -         | 25   | -               | MKP1847570254K2   |
|   | 8                | 21.0                  | 31.0 | 32.0 | 27.5       | -           | 50                  | 400                      | 9                           | -         | 5   | -         | 25   | -               | MKP1847580254K2   |
|   | 9                | 20.0                  | 35.0 | 32.0 | 27.5       | -           | 50                  | 450                      | 11                          | -         | 5   | -         | 25   | -               | MKP1847590254K2   |
|   | 5                | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 125                      | 7                           | 8         | 10  | 8         | 70   | 65              | MKP1847550254P*   |
|   | 6                | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 150                      | 7                           | 8         | 10  | 8         | 70   | 65              | MKP1847560254P*   |
|   | 7                | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 175                      | 7                           | 8         | 10  | 8         | 70   | 65              | MKP1847570254P*   |
|   | 8                | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 200                      | 8                           | 9         | 10  | 8         | 70   | 65              | MKP1847580254P*   |
|   | 9                | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 225                      | 8                           | 9         | 10  | 8         | 70   | 65              | MKP1847590254P*   |
|   | 10               | 18.5                  | 35.5 | 43.0 | 37.5       | 10.2        | 25                  | 250                      | 9                           | 10        | 10  | 8         | 70   | 65              | MKP1847610254P*   |
| 12  | 18.5             | 35.5                  | 43.0 | 37.5 | 10.2       | 25          | 300                 | 10                       | 11                          | 10        | 8   | 70        | 65   | MKP1847612254P* |                   |
| 15  | 21.5             | 38.5                  | 43.0 | 37.5 | 10.2       | 25          | 375                 | 11                       | 12                          | 10        | 8   | 70        | 65   | MKP1847615254P* |                   |



| ELECTRICAL DATA AND ORDERING CODE |  |  |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
|-----------------------------------|--|--|------|------|------------|-------------|---------------------|--------------------------|-----------------------------|-----------|---|-----------|--|-----------------|-------------------|
| U <sub>RAC</sub> (V)              | CAP. (1)<br>(μF)   | DIMENSION (2)<br>(mm)  |      |      | P1<br>(mm) | P2<br>(mm)  | dV/dt (3)<br>(V/μs) | I <sub>PEAK</sub><br>(A) | I <sub>RMS</sub> (4)<br>(A) |           | tan δ<br>1 kHz<br>(< 10 <sup>-4</sup> ) (5) |           | tan δ<br>10 kHz<br>(< 10 <sup>-4</sup> ) (5) |                 | ORDERING CODE (6) |
|                                   |  | w  | h    | l    |            |             |                     |                          | 2<br>PINS                   | 4<br>PINS | 2<br>PINS                                   | 4<br>PINS | 2<br>PINS                                    | 4<br>PINS       |                   |
|                                   |  | U <sub>NDC</sub> = 500 V; U <sub>RMS</sub> AT 85 °C = 250 V <sub>AC</sub> ; U <sub>RMS</sub> AT 105 °C = 175 V <sub>AC</sub> |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
| 250                               | 20   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 25                  | 500                      | 10                          | 11        | 10  | 8         | 70   | 65              | MKP1847620254P*   |
|                                   | 22   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 25                  | 550                      | 15                          | 16        | 10  | 8         | 70   | 65              | MKP1847622254P*   |
|                                   | 25   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 25                  | 625                      | 16                          | 17        | 10  | 8         | 70   | 65              | MKP1847625254P*   |
|                                   | 15   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 12                  | 180                      | 12                          | 13        | 16  | 14        | 135  | 125             | MKP1847615254Y*   |
|                                   | 20   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 12                  | 240                      | 12                          | 13        | 16  | 14        | 135  | 125             | MKP1847620254Y*   |
|                                   | 22   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 12                  | 264                      | 12                          | 13        | 16  | 14        | 135  | 125             | MKP1847622254Y*   |
|                                   | 25   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 12                  | 300                      | 13                          | 14        | 16  | 14        | 135  | 125             | MKP1847625254Y*   |
|                                   | 30   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 12                  | 360                      | 15                          | 16        | 16  | 14        | 135  | 125             | MKP1847630254Y*   |
|                                   | 35   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 12                  | 420                      | 16                          | 17        | 16  | 14        | 135  | 125             | MKP1847635254Y*   |
|                                   | 40   | 35.0   | 50.0 | 57.5 | 52.5       | 20.3        | 12                  | 480                      | 19                          | 20        | 16  | 14        | 135  | 125             | MKP1847640254Y*   |
|                                   | 45   | 35.0   | 50.0 | 57.5 | 52.5       | 20.3        | 12                  | 540                      | 20                          | 21        | 16  | 14        | 135  | 125             | MKP1847645254Y*   |
|                                   | 50   | 35.0   | 50.0 | 57.5 | 52.5       | 20.3        | 12                  | 600                      | 21                          | 22        | 16  | 14        | 135  | 125             | MKP1847650254Y*   |
| 55                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 12          | 660                 | -                        | 24                          | -         | 14  | -         | 125  | MKP1847655254Y5 |                   |
| 60                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 12          | 720                 | -                        | 25                          | -         | 14  | -         | 125  | MKP1847660255Y5 |                   |
| 275                               | U <sub>NDC</sub> = 600 V; U <sub>RMS</sub> AT 85 °C = 275 V <sub>AC</sub> ; U <sub>RMS</sub> AT 105 °C = 190 V <sub>AC</sub> |  |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
|                                   | 1  | 9.0  | 19.0 | 32.0 | 27.5       | -           | 55                  | 55                       | 2.5                         | -         | 5   | -         | 25   | -               | MKP1847510274K2   |
|                                   | 2  | 13.0   | 23.0 | 32.0 | 27.5       | -           | 55                  | 110                      | 4.5                         | -         | 5   | -         | 25   | -               | MKP1847520274K2   |
|                                   | 3  | 15.0   | 25.0 | 32.0 | 27.5       | -           | 55                  | 165                      | 5.5                         | -         | 5   | -         | 25   | -               | MKP1847530274K2   |
|                                   | 4  | 18.0   | 28.0 | 32.0 | 27.5       | -           | 55                  | 220                      | 7                           | -         | 5   | -         | 25   | -               | MKP1847540274K2   |
|                                   | 5  | 21.0   | 31.0 | 32.0 | 27.5       | -           | 55                  | 275                      | 8                           | -         | 5   | -         | 25   | -               | MKP1847550274K2   |
|                                   | 6  | 21.0   | 31.0 | 32.0 | 27.5       | -           | 55                  | 330                      | 7                           | -         | 5   | -         | 25   | -               | MKP1847560274K2   |
|                                   | 7  | 20.0   | 35.0 | 32.0 | 27.5       | -           | 55                  | 385                      | 10                          | -         | 5   | -         | 25   | -               | MKP1847570274K2   |
|                                   | 5  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 30                  | 150                      | 7                           | 8         | 8   | 7         | 65   | 55              | MKP1847550274P*   |
|                                   | 6  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 30                  | 180                      | 7                           | 8         | 8   | 7         | 65   | 55              | MKP1847560274P*   |
|                                   | 7  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 30                  | 210                      | 8                           | 9         | 8   | 7         | 65   | 55              | MKP1847570274P*   |
|                                   | 8  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 30                  | 240                      | 8                           | 9         | 8   | 7         | 65   | 55              | MKP1847580274P*   |
|                                   | 9  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 30                  | 270                      | 9                           | 10        | 8   | 7         | 65   | 55              | MKP1847590274P*   |
|                                   | 10   | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 30                  | 300                      | 10                          | 11        | 8   | 7         | 65   | 55              | MKP1847610274P*   |
|                                   | 12   | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 30                  | 360                      | 11                          | 12        | 8   | 7         | 65   | 55              | MKP1847612274P*   |
|                                   | 15   | 24.0   | 44.0 | 42.0 | 37.5       | 10.2        | 30                  | 450                      | 13                          | 14        | 8   | 7         | 65   | 55              | MKP1847615274P*   |
|                                   | 20   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 30                  | 600                      | 16                          | 17        | 8   | 7         | 65   | 55              | MKP1847620274P*   |
|                                   | 15   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 13                  | 195                      | 11                          | 12        | 15  | 12        | 125  | 105             | MKP1847615274Y*   |
|                                   | 20   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 13                  | 260                      | 12                          | 13        | 15  | 12        | 125  | 105             | MKP1847620274Y*   |
|                                   | 22   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 13                  | 286                      | 13                          | 14        | 15  | 12        | 125  | 105             | MKP1847622274Y*   |
|                                   | 25   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 13                  | 325                      | 15                          | 16        | 15  | 12        | 125  | 105             | MKP1847625274Y*   |
|                                   | 30   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 13                  | 390                      | 16                          | 17        | 15  | 12        | 125  | 105             | MKP1847630274Y*   |
| 35                                | 35.0   | 50.0   | 57.5 | 52.5 | 20.3       | 13          | 455                 | 19                       | 20                          | 15        | 12  | 125       | 105  | MKP1847635274Y* |                   |
| 40                                | 35.0   | 50.0   | 57.5 | 52.5 | 20.3       | 13          | 520                 | 20                       | 21                          | 15        | 12  | 125       | 105  | MKP1847640274Y* |                   |
| 45                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 13          | 585                 | -                        | 23                          | -         | 12  | -         | 105  | MKP1847645274Y5 |                   |
| 50                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 13          | 650                 | -                        | 24                          | -         | 12  | -         | 105  | MKP1847650275Y5 |                   |



| ELECTRICAL DATA AND ORDERING CODE |  |  |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
|-----------------------------------|--|--|------|------|------------|-------------|---------------------|--------------------------|-----------------------------|-----------|---|-----------|--|-----------------|-------------------|
| U <sub>RAC</sub><br>(V)           | CAP. (1)<br>(μF)   | DIMENSION (2)<br>(mm)  |      |      | P1<br>(mm) | P2<br>(mm)  | dV/dt (3)<br>(V/μs) | I <sub>PEAK</sub><br>(A) | I <sub>RMS</sub> (4)<br>(A) |           | tan δ<br>1 kHz<br>(< 10 <sup>-4</sup> ) (5) |           | tan δ<br>10 kHz<br>(< 10 <sup>-4</sup> ) (5) |                 | ORDERING CODE (6) |
|                                   |  | w  | h    | l    |            |             |                     |                          | 2<br>PINS                   | 4<br>PINS | 2<br>PINS                                   | 4<br>PINS | 2<br>PINS                                    | 4<br>PINS       |                   |
|                                   |  | U <sub>NDC</sub> = 630 V; U <sub>RMS</sub> AT 85 °C = 310 V <sub>AC</sub> ; U <sub>RMS</sub> AT 105 °C = 210 V <sub>AC</sub> |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
| 310                               | 1  | 11.0   | 21.0 | 32.0 | 27.5       | -           | 68                  | 68                       | 3                           | -         | 5   | -         | 20   | -               | MKP1847510314K2   |
|                                   | 2  | 15.0   | 25.0 | 32.0 | 27.5       | -           | 68                  | 136                      | 5                           | -         | 5   | -         | 20   | -               | MKP1847520314K2   |
|                                   | 3  | 18.0   | 28.0 | 32.0 | 27.5       | -           | 68                  | 204                      | 7                           | -         | 5   | -         | 20   | -               | MKP1847530314K2   |
|                                   | 4  | 21.0   | 31.0 | 32.0 | 27.5       | -           | 68                  | 272                      | 8                           | -         | 5   | -         | 20   | -               | MKP1847540314K2   |
|                                   | 5  | 21.0   | 31.0 | 32.0 | 27.5       | -           | 68                  | 340                      | 9                           | -         | 5   | -         | 20   | -               | MKP1847550314K2   |
|                                   | 5  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 35                  | 175                      | 7                           | 8         | 7   | 6         | 55   | 50              | MKP1847550314P*   |
|                                   | 6  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 35                  | 210                      | 8                           | 9         | 7   | 6         | 55   | 50              | MKP1847560314P*   |
|                                   | 7  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 35                  | 245                      | 9                           | 10        | 7   | 6         | 55   | 50              | MKP1847570314P*   |
|                                   | 8  | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 35                  | 280                      | 10                          | 11        | 7   | 6         | 55   | 50              | MKP1847580314P*   |
|                                   | 9  | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 35                  | 315                      | 10                          | 11        | 7   | 6         | 55   | 50              | MKP1847590314P*   |
|                                   | 10   | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 35                  | 350                      | 11                          | 12        | 7   | 6         | 55   | 50              | MKP1847610315P*   |
|                                   | 12   | 24.0   | 44.0 | 42.0 | 37.5       | 10.2        | 35                  | 420                      | 12                          | 13        | 7   | 6         | 55   | 50              | MKP1847612314P*   |
|                                   | 15   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 35                  | 525                      | 15                          | 16        | 7   | 6         | 55   | 50              | MKP1847615314P*   |
|                                   | 10   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 15                  | 150                      | 10                          | 11        | 12  | 10        | 105  | 90              | MKP1847610314Y*   |
|                                   | 12   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 15                  | 180                      | 10                          | 11        | 12  | 10        | 105  | 90              | MKP1847612314Y*   |
|                                   | 15   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 15                  | 225                      | 12                          | 13        | 12  | 10        | 105  | 90              | MKP1847615314Y*   |
|                                   | 20   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 15                  | 300                      | 14                          | 15        | 12  | 10        | 105  | 90              | MKP1847620314Y*   |
| 22                                | 35.0   | 50.0   | 57.5 | 52.5 | 20.3       | 15          | 330                 | 16                       | 17                          | 12        | 10  | 105       | 90   | MKP1847622314Y* |                   |
| 25                                | 35.0   | 50.0   | 57.5 | 52.5 | 20.3       | 15          | 375                 | 17                       | 18                          | 12        | 10  | 105       | 90   | MKP1847625314Y* |                   |
| 30                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 15          | 450                 | -                        | 21                          | -         | 10  | -         | 90   | MKP1847630314Y5 |                   |
| 35                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 15          | 525                 | -                        | 22                          | -         | 10  | -         | 90   | MKP1847635314Y5 |                   |
| 350                               | U <sub>NDC</sub> = 700 V; U <sub>RMS</sub> AT 85 °C = 350 V <sub>AC</sub> ; U <sub>RMS</sub> AT 105 °C = 240 V <sub>AC</sub> |  |      |      |            |             |                     |                          |                             |           |   |           |  |                 |                   |
|                                   | 1  | 11.0   | 21.0 | 32.0 | 27.5       | -           | 100                 | 100                      | 3                           | -         | 5   | -         | 20   | -               | MKP1847510354K2   |
|                                   | 2  | 15.0   | 25.0 | 32.0 | 27.5       | -           | 100                 | 200                      | 5                           | -         | 5   | -         | 20   | -               | MKP1847520354K2   |
|                                   | 3  | 18.0   | 28.0 | 32.0 | 27.5       | -           | 100                 | 300                      | 7                           | -         | 5   | -         | 20   | -               | MKP1847530354K2   |
|                                   | 4  | 21.0   | 31.0 | 32.0 | 27.5       | -           | 100                 | 400                      | 9                           | -         | 5   | -         | 20   | -               | MKP1847540354K2   |
|                                   | 5  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 50                  | 250                      | 7                           | 8         | 7   | 6         | 50   | 45              | MKP1847550354P*   |
|                                   | 6  | 18.5   | 35.5 | 43.0 | 37.5       | 10.2        | 50                  | 300                      | 8                           | 9         | 7   | 6         | 50   | 45              | MKP1847560354P*   |
|                                   | 7  | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 50                  | 350                      | 9                           | 10        | 7   | 6         | 50   | 45              | MKP1847570354P*   |
|                                   | 8  | 21.5   | 38.5 | 43.0 | 37.5       | 10.2        | 50                  | 400                      | 10                          | 11        | 7   | 6         | 50   | 45              | MKP1847580354P*   |
|                                   | 9  | 24.0   | 44.0 | 42.0 | 37.5       | 10.2        | 50                  | 450                      | 11                          | 12        | 7   | 6         | 50   | 45              | MKP1847590354P*   |
|                                   | 10   | 24.0   | 44.0 | 42.0 | 37.5       | 10.2        | 50                  | 500                      | 12                          | 13        | 7   | 6         | 50   | 45              | MKP1847610354P*   |
|                                   | 12   | 30.0   | 45.0 | 42.0 | 37.5       | 10.2 / 20.3 | 50                  | 600                      | 14                          | 15        | 7   | 6         | 50   | 45              | MKP1847612354P*   |
|                                   | 10   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 25                  | 250                      | 10                          | 11        | 12  | 10        | 100  | 85              | MKP1847610354Y*   |
|                                   | 12   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 25                  | 300                      | 11                          | 12        | 12  | 10        | 100  | 85              | MKP1847612354Y*   |
|                                   | 15   | 25.0   | 45.0 | 57.5 | 52.5       | 10.2        | 25                  | 375                      | 12                          | 13        | 12  | 10        | 100  | 85              | MKP1847615354Y*   |
|                                   | 20   | 30.0   | 45.0 | 57.5 | 52.5       | 20.3        | 25                  | 500                      | 15                          | 16        | 12  | 10        | 100  | 85              | MKP1847620354Y*   |
|                                   | 22   | 35.0   | 50.0 | 57.5 | 52.5       | 20.3        | 25                  | 550                      | 17                          | 18        | 12  | 10        | 100  | 85              | MKP1847622354Y*   |
| 25                                | 35.0   | 50.0   | 57.5 | 52.5 | 20.3       | 25          | 625                 | 18                       | 19                          | 12        | 10  | 100       | 85   | MKP1847625354Y* |                   |
| 30                                | 45.0   | 45.0   | 57.5 | 52.5 | 20.3       | 25          | 750                 | -                        | 22                          | -         | 10  | -         | 85   | MKP1847630354Y5 |                   |



| ELECTRICAL DATA AND ORDERING CODE   |               |                    |      |      |         |             |                  |                       |                          |        |                                       |        |  |                 |                   |
|---|---------------|--------------------|------|------|---------|-------------|------------------|-----------------------|--------------------------|--------|---------------------------------------|--------|--|-----------------|-------------------|
| U <sub>RAC</sub> (V)  | CAP. (1) (μF) | DIMENSION (2) (mm) |      |      | P1 (mm) | P2 (mm)     | dV/dt (3) (V/μs) | I <sub>PEAK</sub> (A) | I <sub>RMS</sub> (4) (A) |        | tan δ 1 kHz (< 10 <sup>-4</sup> ) (5) |        | tan δ 10 kHz (< 10 <sup>-4</sup> ) (5) |                 | ORDERING CODE (6) |
|   |               | w                  | h    | l    |         |             |                  |                       | 2 PINS                   | 4 PINS | 2 PINS                                | 4 PINS | 2 PINS                                 | 4 PINS          |                   |
| U <sub>NDc</sub> = 1000 V; U <sub>RMS</sub> AT 85 °C = 440 V <sub>AC</sub> ; U <sub>RMS</sub> AT 105 °C = 300 V <sub>AC</sub> |               |                    |      |      |         |             |                  |                       |                          |        |                                       |        |  |                 |                   |
| 440   | 1.0           | 15.7               | 28.5 | 41.5 | 37.5    | 10.2        | 80               | 80                    | 5                        | -      | 7                                     | -      | 25                                     | -               | MKP1847510444P*   |
|   | 1.5           | 18.5               | 35.5 | 43.0 | 37.5    | 10.2        | 80               | 120                   | 7                        | -      | 7                                     | -      | 25                                     | -               | MKP1847515444P*   |
|   | 2.0           | 21.5               | 38.5 | 43.0 | 37.5    | 10.2        | 80               | 160                   | 9                        | 10     | 7                                     | 6      | 25                                     | 20              | MKP1847520444P*   |
|   | 2.2           | 21.5               | 38.5 | 43.0 | 37.5    | 10.2        | 80               | 176                   | 9                        | 10     | 7                                     | 6      | 25                                     | 20              | MKP1847522444P*   |
|   | 3             | 24.0               | 44.0 | 42.0 | 37.5    | 10.2 / 20.3 | 80               | 240                   | 12                       | 13     | 7                                     | 6      | 25                                     | 20              | MKP1847530444P*   |
|   | 3.3           | 24.0               | 44.0 | 42.0 | 37.5    | 10.2 / 20.3 | 80               | 264                   | 12                       | 13     | 7                                     | 6      | 25                                     | 20              | MKP1847533444P*   |
|   | 4             | 30.0               | 45.0 | 42.0 | 37.5    | 10.2 / 20.3 | 80               | 320                   | 14                       | 15     | 7                                     | 6      | 25                                     | 20              | MKP1847540444P*   |
|   | 5             | 30.0               | 57.0 | 42.0 | 37.5    | 20.3        | 80               | 400                   | 17                       | 18     | 7                                     | 6      | 25                                     | 20              | MKP1847550444P*   |
|   | 5             | 25.0               | 45.0 | 57.5 | 52.5    | 10.2        | 35               | 175                   | 13                       | 14     | 12                                    | 10     | 50                                     | 40              | MKP1847550444Y*   |
|   | 6             | 30.0               | 45.0 | 57.5 | 52.5    | 20.3        | 35               | 210                   | 14                       | 15     | 12                                    | 10     | 50                                     | 40              | MKP1847560444Y*   |
|   | 7             | 35.0               | 50.0 | 57.5 | 52.5    | 20.3        | 35               | 245                   | 17                       | 18     | 12                                    | 10     | 50                                     | 40              | MKP1847570444Y*   |
|   | 8             | 35.0               | 50.0 | 57.5 | 52.5    | 20.3        | 35               | 280                   | 18                       | 19     | 12                                    | 10     | 50                                     | 40              | MKP1847580444Y*   |
| 9   | 35.0          | 50.0               | 57.5 | 52.5 | 20.3    | 35          | 315              | 19                    | 20                       | 12     | 10                                    | 50     | 40                                     | MKP1847580444Y* |                   |
| 10  | 35.0          | 50.0               | 57.5 | 52.5 | 20.3    | 35          | 350              | 20                    | 21                       | 12     | 10                                    | 50     | 40                                     | MKP1847610444Y* |                   |
| 12  | 45.0          | 45.0               | 57.5 | 52.5 | 20.3    | 35          | 420              | -                     | 24                       | -      | 10                                    | -      | 40                                     | MKP1847612444Y5 |                   |

Notes

- (1) Intermediate capacitance values available on request
- (2) Standard dimension
- (3) Rated voltage pulse slope (dU/dt) R at voltage U<sub>NDc</sub>
- (4) Maximum RMS current at 10 kHz, +85 °C, capacitance tolerance specified
- (5) The ESR (Equivalent Series Resistance) can be calculated as tan δ (f)/(2 x π x f x C)
- (6) Change the \* symbol with special code for the terminals

| PACKAGING INFORMATION |               |                 |                   |          |               |
|-----------------------|---------------|-----------------|-------------------|----------|---------------|
| U <sub>RMS</sub> (V)  | CAP. (1) (μF) | Ø dt            | ORDERING CODE (2) | MASS (g) | SPQ (3) (pcs) |
| 230                   | 1             | 0.8             | MKP1847510234K2   | 6        | 160           |
|                       | 2             | 0.8             | MKP1847520234K2   | 9        | 130           |
|                       | 3             | 0.8             | MKP1847530234K2   | 11       | 115           |
|                       | 4             | 0.8             | MKP1847540234K2   | 12       | 100           |
|                       | 5             | 0.8             | MKP1847550234K2   | 17       | 80            |
|                       | 6             | 0.8             | MKP1847560234K2   | 16       | 80            |
|                       | 7             | 0.8             | MKP1847570234K2   | 15       | 80            |
|                       | 8             | 0.8             | MKP1847580234K2   | 22       | 65            |
|                       | 9             | 0.8             | MKP1847590234K2   | 21       | 65            |
|                       | 10            | 0.8             | MKP1847610234K2   | 21       | 70            |
|                       | 10            | 1.0             | MKP1847610234P*   | 32       | 105           |
|                       | 12            | 1.0             | MKP1847612234P*   | 30       | 105           |
|                       | 15            | 1.0             | MKP1847615234P*   | 37       | 91            |
|                       | 20            | 1.0             | MKP1847620234P*   | 48       | 77            |
|                       | 22            | 1.0             | MKP1847622234P*   | 45       | 77            |
|                       | 25            | 1.0             | MKP1847625234P*   | 62       | 63            |
|                       | 30            | 1.0             | MKP1847630234P*   | 56       | 63            |
|                       | 30            | 1.2             | MKP1847630234Y*   | 69       | 55            |
|                       | 35            | 1.2             | MKP1847635234Y*   | 65       | 55            |
|                       | 40            | 1.2             | MKP1847640234Y*   | 91       | 45            |
| 45                    | 1.2           | MKP1847645234Y* | 86                | 45       |               |
| 50                    | 1.2           | MKP1847650234Y* | 107               | 40       |               |
| 55                    | 1.2           | MKP1847655234Y* | 101               | 40       |               |
| 60                    | 1.2           | MKP1847660234Y* | 96                | 40       |               |
| 65                    | 1.2           | MKP1847665234Y5 | 121               | 30       |               |
| 70                    | 1.2           | MKP1847670235Y5 | 120               | 30       |               |



| PACKAGING INFORMATION   |                             |                 |                              |             |                             |
|-------------------------|-----------------------------|-----------------|------------------------------|-------------|-----------------------------|
| U <sub>RMS</sub><br>(V) | CAP. <sup>(1)</sup><br>(μF) | Ø dt            | ORDERING CODE <sup>(2)</sup> | MASS<br>(g) | SPQ <sup>(3)</sup><br>(pcs) |
| 250                     | 1                           | 0.8             | MKP1847510254K2              | 6           | 160                         |
|                         | 2                           | 0.8             | MKP1847520254K2              | 9           | 130                         |
|                         | 3                           | 0.8             | MKP1847530254K2              | 10          | 115                         |
|                         | 4                           | 0.8             | MKP1847540254K2              | 12          | 100                         |
|                         | 5                           | 0.8             | MKP1847550254K2              | 16          | 80                          |
|                         | 6                           | 0.8             | MKP1847560254K2              | 15          | 80                          |
|                         | 7                           | 0.8             | MKP1847570254K2              | 22          | 65                          |
|                         | 8                           | 0.8             | MKP1847580254K2              | 21          | 65                          |
|                         | 9                           | 0.8             | MKP1847590254K2              | 20          | 70                          |
|                         | 5                           | 1.0             | MKP1847550254P*              | 36          | 105                         |
|                         | 6                           | 1.0             | MKP1847560254P*              | 35          | 105                         |
|                         | 7                           | 1.0             | MKP1847570254P*              | 34          | 105                         |
|                         | 8                           | 1.0             | MKP1847580254P*              | 32          | 105                         |
|                         | 9                           | 1.0             | MKP1847590254P*              | 31          | 105                         |
|                         | 10                          | 1.0             | MKP1847610254P*              | 30          | 105                         |
|                         | 12                          | 1.0             | MKP1847612254P*              | 27          | 105                         |
|                         | 15                          | 1.0             | MKP1847615254P*              | 34          | 91                          |
|                         | 20                          | 1.0             | MKP1847620254P*              | 63          | 63                          |
|                         | 22                          | 1.0             | MKP1847622254P*              | 61          | 63                          |
|                         | 25                          | 1.0             | MKP1847625254P*              | 57          | 63                          |
|                         | 15                          | 1.2             | MKP1847615254Y*              | 83          | 55                          |
|                         | 20                          | 1.2             | MKP1847620254Y*              | 77          | 55                          |
|                         | 22                          | 1.2             | MKP1847622254Y*              | 75          | 55                          |
|                         | 25                          | 1.2             | MKP1847625254Y*              | 71          | 55                          |
|                         | 30                          | 1.2             | MKP1847630254Y*              | 97          | 45                          |
|                         | 35                          | 1.2             | MKP1847635254Y*              | 91          | 45                          |
|                         | 40                          | 1.2             | MKP1847640254Y*              | 111         | 40                          |
|                         | 45                          | 1.2             | MKP1847645254Y*              | 105         | 40                          |
| 50                      | 1.2                         | MKP1847650254Y* | 98                           | 40          |                             |
| 55                      | 1.2                         | MKP1847655254Y5 | 123                          | 30          |                             |
| 60                      | 1.2                         | MKP1847660255Y5 | 120                          | 30          |                             |
| 275                     | 1                           | 0.8             | MKP1847510274K2              | 6           | 160                         |
|                         | 2                           | 0.8             | MKP1847520274K2              | 11          | 115                         |
|                         | 3                           | 0.8             | MKP1847530274K2              | 12          | 100                         |
|                         | 4                           | 0.8             | MKP1847540274K2              | 16          | 80                          |
|                         | 5                           | 0.8             | MKP1847550274K2              | 22          | 65                          |
|                         | 6                           | 0.8             | MKP1847560274K2              | 21          | 65                          |
|                         | 7                           | 0.8             | MKP1847570274K2              | 20          | 70                          |
|                         | 5                           | 1.0             | MKP1847550274P*              | 34          | 105                         |
|                         | 6                           | 1.0             | MKP1847560274P*              | 33          | 105                         |
|                         | 7                           | 1.0             | MKP1847570274P*              | 31          | 105                         |
|                         | 8                           | 1.0             | MKP1847580274P*              | 30          | 105                         |
|                         | 9                           | 1.0             | MKP1847590274P*              | 28          | 105                         |
|                         | 10                          | 1.0             | MKP1847610274P*              | 37          | 91                          |
|                         | 12                          | 1.0             | MKP1847612274P*              | 34          | 91                          |
|                         | 15                          | 1.0             | MKP1847615274P*              | 45          | 77                          |
|                         | 20                          | 1.0             | MKP1847620274P*              | 56          | 63                          |
|                         | 15                          | 1.2             | MKP1847615274Y*              | 78          | 55                          |
|                         | 20                          | 1.2             | MKP1847620274Y*              | 70          | 55                          |
|                         | 22                          | 1.2             | MKP1847622274Y*              | 67          | 55                          |
|                         | 25                          | 1.2             | MKP1847625274Y*              | 95          | 45                          |
|                         | 30                          | 1.2             | MKP1847630274Y*              | 86          | 45                          |
|                         | 35                          | 1.2             | MKP1847635274Y*              | 106         | 40                          |
|                         | 40                          | 1.2             | MKP1847640274Y*              | 96          | 40                          |
| 45                      | 1.2                         | MKP1847645274Y5 | 186                          | 30          |                             |
| 50                      | 1.2                         | MKP1847650275Y5 | 186                          | 30          |                             |



| PACKAGING INFORMATION   |                             |                 |                              |                 |                             |     |
|-------------------------|-----------------------------|-----------------|------------------------------|-----------------|-----------------------------|-----|
| U <sub>RMS</sub><br>(V) | CAP. <sup>(1)</sup><br>(µF) | Ø dt            | ORDERING CODE <sup>(2)</sup> | MASS<br>(g)     | SPQ <sup>(3)</sup><br>(pcs) |     |
| 310                     | 1.0                         | 0.8             | MKP1847510314K2              | 9               | 130                         |     |
|                         | 2.0                         | 0.8             | MKP1847520314K2              | 12              | 100                         |     |
|                         | 3.0                         | 0.8             | MKP1847530314K2              | 16              | 80                          |     |
|                         | 4.0                         | 0.8             | MKP1847540314K2              | 22              | 65                          |     |
|                         | 5.0                         | 0.8             | MKP1847550314K2              | 20              | 65                          |     |
|                         | 5.0                         | 1.0             | MKP1847550314P*              | 32              | 105                         |     |
|                         | 6.0                         | 1.0             | MKP1847560314P*              | 30              | 105                         |     |
|                         | 7.0                         | 1.0             | MKP1847570314P*              | 28              | 105                         |     |
|                         | 8.0                         | 1.0             | MKP1847580314P*              | 37              | 91                          |     |
|                         | 9.0                         | 1.0             | MKP1847590314P*              | 35              | 91                          |     |
|                         | 10                          | 1.0             | MKP1847610315P*              | 34              | 91                          |     |
|                         | 12                          | 1.0             | MKP1847612314P*              | 44              | 77                          |     |
|                         | 15                          | 1.0             | MKP1847615314P*              | 58              | 63                          |     |
|                         | 10                          | 1.2             | MKP1847610314Y*              | 81              | 55                          |     |
|                         | 12                          | 1.2             | MKP1847612314Y*              | 77              | 55                          |     |
|                         | 15                          | 1.2             | MKP1847615314Y*              | 71              | 55                          |     |
|                         | 20                          | 1.2             | MKP1847620314Y*              | 93              | 45                          |     |
|                         | 22                          | 1.2             | MKP1847622314Y*              | 117             | 40                          |     |
|                         | 25                          | 1.2             | MKP1847625314Y*              | 111             | 40                          |     |
|                         | 30                          | 1.2             | MKP1847630314Y5              | 187             | 30                          |     |
| 35                      | 1.2                         | MKP1847635314Y5 | 187                          | 30              |                             |     |
| 350                     | 1.0                         | 0.8             | MKP1847510354K2              | 9               | 130                         |     |
|                         | 2.0                         | 0.8             | MKP1847520354K2              | 12              | 100                         |     |
|                         | 3.0                         | 0.8             | MKP1847530354K2              | 15              | 80                          |     |
|                         | 4.0                         | 0.8             | MKP1847540354K2              | 21              | 65                          |     |
|                         | 5.0                         | 1.0             | MKP1847550354P*              | 30              | 105                         |     |
|                         | 6.0                         | 1.0             | MKP1847560354P*              | 28              | 105                         |     |
|                         | 7.0                         | 1.0             | MKP1847570354P*              | 37              | 91                          |     |
|                         | 8.0                         | 1.0             | MKP1847580354P*              | 34              | 91                          |     |
|                         | 9.0                         | 1.0             | MKP1847590354P*              | 48              | 77                          |     |
|                         | 10                          | 1.0             | MKP1847610354P*              | 45              | 77                          |     |
|                         | 12                          | 1.0             | MKP1847612354P*              | 60              | 63                          |     |
|                         | 10                          | 1.2             | MKP1847610354Y*              | 78              | 55                          |     |
|                         | 12                          | 1.2             | MKP1847612354Y*              | 74              | 55                          |     |
|                         | 15                          | 1.2             | MKP1847615354Y*              | 67              | 55                          |     |
|                         | 20                          | 1.2             | MKP1847620354Y*              | 87              | 45                          |     |
|                         | 22                          | 1.2             | MKP1847622354Y*              | 111             | 40                          |     |
|                         | 25                          | 1.2             | MKP1847625354Y*              | 102             | 40                          |     |
|                         | 30                          | 1.2             | MKP1847630354Y5              | 187             | 30                          |     |
|                         | 440                         | 1.0             | 1.0                          | MKP1847510444P* | 27                          | 70  |
|                         |                             | 1.5             | 1.0                          | MKP1847515444P* | 42                          | 105 |
| 2.0                     |                             | 1.0             | MKP1847520444P*              | 52              | 91                          |     |
| 2.2                     |                             | 1.0             | MKP1847522444P*              | 52              | 91                          |     |
| 3.0                     |                             | 1.0             | MKP1847530444P*              | 61              | 77                          |     |
| 3.3                     |                             | 1.0             | MKP1847533444P*              | 58              | 77                          |     |
| 4.0                     |                             | 1.0             | MKP1847540444P*              | 74              | 63                          |     |
| 5.0                     |                             | 1.0             | MKP1847550444P*              | 83              | 63                          |     |
| 5.0                     |                             | 1.2             | MKP1847550444Y*              | 100             | 55                          |     |
| 6.0                     |                             | 1.2             | MKP1847560444Y*              | 135             | 45                          |     |
| 7.0                     |                             | 1.2             | MKP1847570444Y*              | 155             | 40                          |     |
| 8.0                     |                             | 1.2             | MKP1847580444Y*              | 152             | 40                          |     |
| 9.0                     |                             | 1.2             | MKP1847590444Y*              | 145             | 40                          |     |
| 10                      |                             | 1.2             | MKP1847610445Y*              | 140             | 40                          |     |
| 12                      |                             | 1.2             | MKP1847612445Y5              | 180             | 30                          |     |

Notes

- (1) Intermediate capacitance values available on request
- (2) Change the \* symbols with special code for terminals
- (3) SPQ = Standard Packing Quantity



## CONSTRUCTION

Low inductive wound cell elements of metallized polypropylene film, potted with resin in a flame retardant case.

### Specific Method of Mounting to Withstand Vibration and Shock

The capacitor unit is designed for mounting on a printed circuit board.


In order to withstand vibration and shock tests, it must be insured that the stand-off pips are in good contact with the printed circuit board.

The capacitors shall be mechanically fixed by the leads and the body clamped.

### Space Requirements on Printed-Circuit Board

The maximum length and width of film capacitors is shown in the figure.

- Product height with seating plane as given by "IEC 60717" as reference:

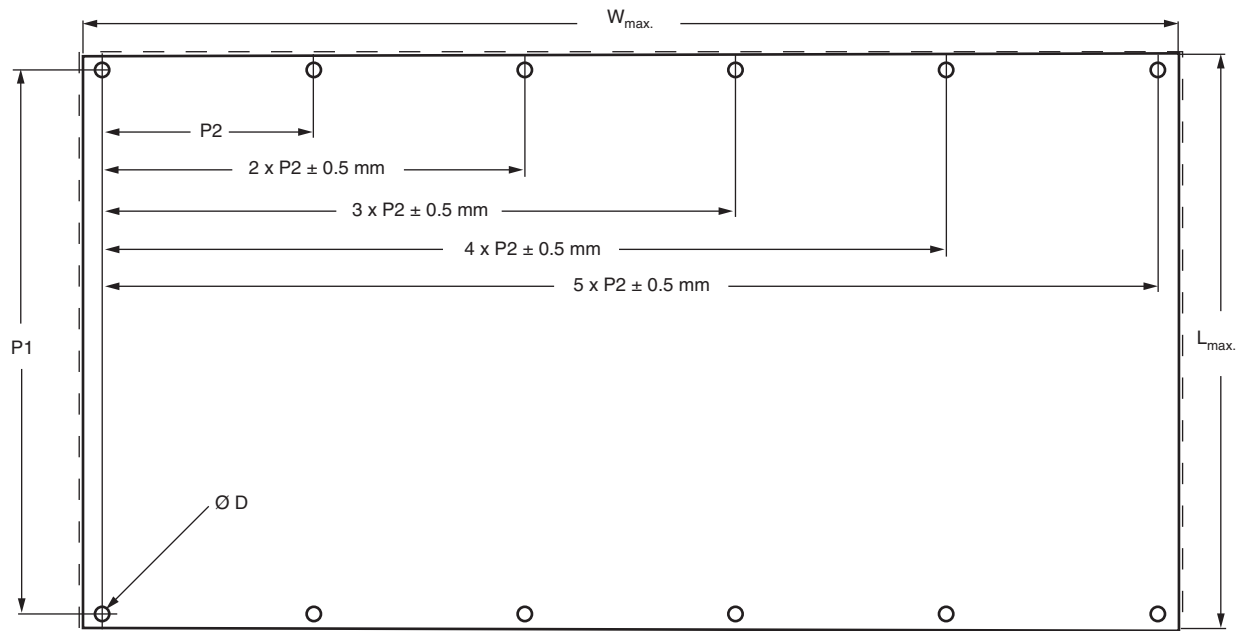

| P1 (mm) | L <sub>max.</sub> (mm) | W <sub>max.</sub> (mm) | Ø D (mm) | Δh (mm) |
|---------|------------------------|------------------------|----------|---------|
| 27.5    | l + 2                  | w + 1.6                | 1.2      | 0.2     |
| 37.5    | l + 3                  | w + 2.0                | 1.5      | 0.5     |
| 52.5    | l + 4                  | w + 2.4                | 1.7      | 0.5     |

## SOLDERING CONDITIONS

For general soldering conditions and wave soldering profile, we refer to the document:

"Characteristics and Definitions used for Film Capacitors": [www.vishay.com/doc?26033](http://www.vishay.com/doc?26033)

### Storage Temperature

T<sub>stg</sub> = -25 °C to +35 °C with RH maximum 75 % without condensation.


### Ratings and Characteristics Reference Conditions

Unless otherwise specified, all electrical values apply to an ambient temperature of 23 °C ± 1 °C, an atmospheric pressure of 86 kPa to 106 kPa and a relative humidity of 50 % ± 2 %.


For reference testing, a conditioning period shall be applied over 96 h ± 4 h by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20 %.




## CHARACTERISTICS

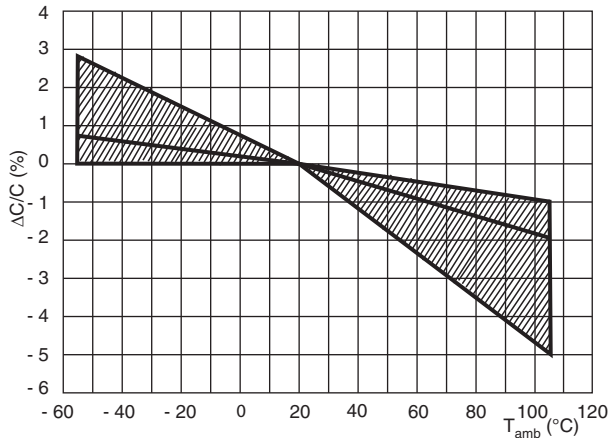


Capacitance as a function of ambient temperature (typical curve)

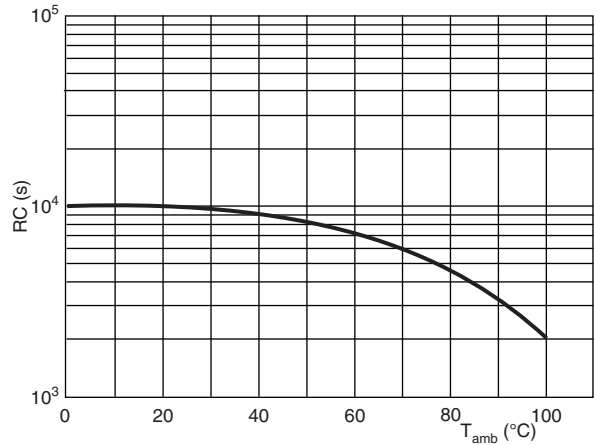


Insulation resistance as a function of ambient temperature (typical curve)

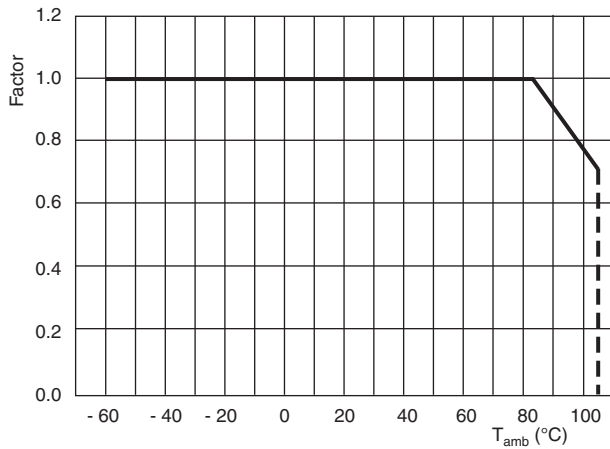


RMS voltage in function of temperature

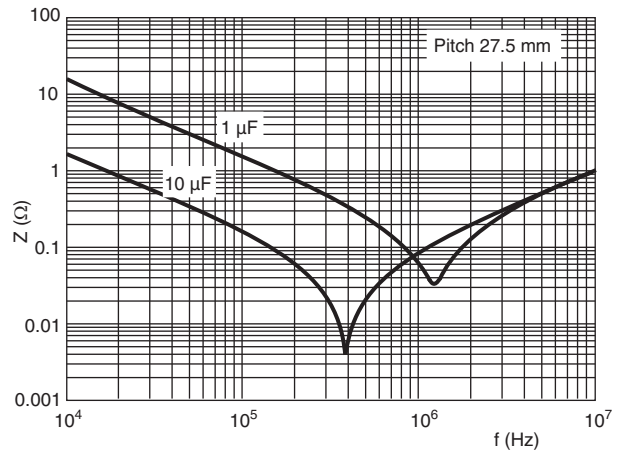

Impedance vs. frequency (typical curve)

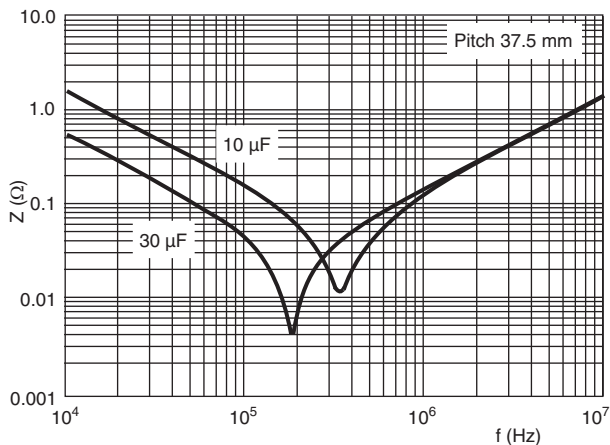

Impedance vs. frequency (typical curve)

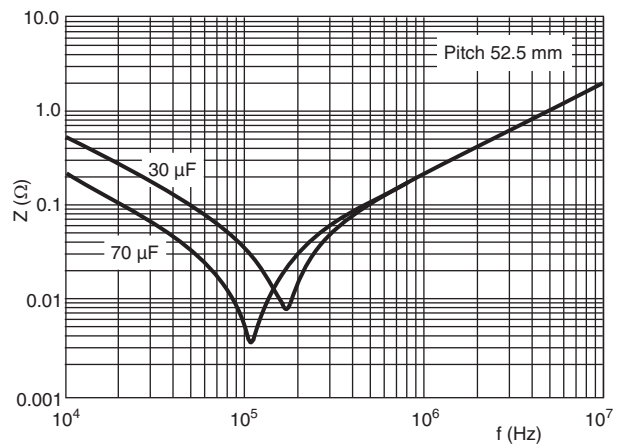

Impedance vs. frequency (typical curve)

| <b>HEAT CONDUCTIVITY</b> |          |          |                                  |                      |                      |
|--------------------------|----------|----------|----------------------------------|----------------------|----------------------|
| <b>DIMENSIONS (mm)</b>   |          |          | <b>HEAT CONDUCTIVITY (mW/°C)</b> |                      |                      |
| <b>w</b>                 | <b>h</b> | <b>l</b> | <b>PITCH 27.5 mm</b>             | <b>PITCH 37.5 mm</b> | <b>PITCH 52.5 mm</b> |
| 9.0                      | 19.0     | 32.0     | 16                               | -                    | -                    |
| 11.0                     | 21.0     | 32.0     | 19                               | -                    | -                    |
| 13.0                     | 23.0     | 32.0     | 22                               | -                    | -                    |
| 15.0                     | 25.0     | 32.0     | 25                               | -                    | -                    |
| 18.0                     | 28.0     | 32.0     | 30                               | -                    | -                    |
| 21.0                     | 31.0     | 32.0     | 35                               | -                    | -                    |
| 18.5                     | 35.5     | 43.0     | -                                | 45                   | -                    |
| 21.5                     | 38.5     | 43.0     | -                                | 51                   | -                    |
| 24.0                     | 44.0     | 42.0     | -                                | 59                   | -                    |
| 30.0                     | 45.0     | 42.0     | -                                | 68                   | -                    |
| 25.0                     | 45.0     | 57.5     | -                                | -                    | 77                   |
| 30.0                     | 45.0     | 57.5     | -                                | -                    | 85                   |
| 35.0                     | 50.0     | 57.5     | -                                | -                    | 100                  |
| 45.0                     | 45.0     | 57.5     | -                                | -                    | 108                  |


### Power Dissipation and Maximum Component Temperature Rise

The power dissipation must be limited in order not to exceed the maximum allowed component temperature rise as a function of the free air ambient temperature.

The component temperature rise ( $\Delta T$ ) can be measured or calculated by  $\Delta T = P/G$ :

- $\Delta T$  = component temperature rise (°C) with a maximum of 15 °C
- P = power dissipation of the component (mW)
- G = heat conductivity of the component (mW/°C)

### MEASURING THE COMPONENT TEMPERATURE

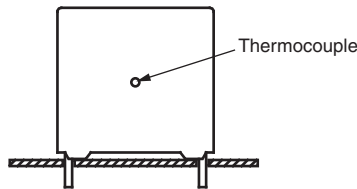

The case temperature is measured in unloaded ( $T_{amb}$ ) and maximum loaded condition ( $T_C$ ).

The temperature rise is given by  $\Delta T = T_C - T_{amb}$ .

To avoid thermal radiation or convection, the capacitor must be tested in a closed area from air circulation.

### APPLICATION NOTE AND LIMITING CONDITIONS

These capacitors are not suitable for mains applications as across-the-line capacitors without additional protection.

These mains applications are strictly regulated in safety standards and therefore electromagnetic interference suppression capacitors conforming the standards must be used.

To select the capacitor for a certain application, the following conditions must be checked:

- The peak voltage ( $U_{P+}$ ) shall not be greater than  $\sqrt{2} \times U_{RMS}$
- The peak-to-peak ripple voltage ( $U_{PP}$ ) shall not be greater than  $2 \times \sqrt{2} \times U_{RMS}$
- The voltage pulse slope ( $dU/dt$ ) shall not exceed the rated pulse slope at the DC voltage rating.  
If the pulse voltage is lower than the rated DC voltage, the rated voltage pulse slope may be multiplied by  $U_{NDC}$  and divided by the applied voltage.

For all other pulses following equation must be fulfilled:

$$2 \times \int_0^T \left( \frac{dU}{dt} \right)^2 \times dt < U_{NDC} \times \left( \frac{dU}{dt} \right)_{rated}$$

T is the pulse duration

- The maximum component surface temperature must be lower than 105 °C and maximum temperature rise between case and free air ambient shall be lower than 15 °C.



**INSPECTION REQUIREMENTS**

**General Notes**

Sub-clause numbers of tests and performance requirements refer to the “Sectional Specification, Publication IEC 61071”.

| SUB-CLAUSE NUMBER AND TEST                           | CONDITIONS  | PERFORMANCE REQUIREMENTS   |
|--|---|--|
| <b>ROUTINE TEST-FINAL INSPECTION</b>                 |   |  |
| 5.14.2.1 External inspection, visual examination     |   | Legible marking as specified   |
| 5.14.2.2 Dimensions                                  |   | See specification drawing  |
| 5.3.1 Capacitance                                    | 1 kHz at room temperature   | See specific reference data  |
| 5.3.2 tan δ  | 1 kHz at room temperature<br>10 kHz at room temperature   | See specific reference data  |
| 5.5.1.2 Voltage test between terminal                | 1.5 x U <sub>NDC</sub> at T <sub>amb</sub><br>Duration 10 s   | No visible damage or puncture<br>No flashover  |
| 5.7 Insulation resistance                            | Measuring voltage 100 V at room temperature<br><br>Duration 1 min   | See specific reference data  |
| <b>TYPE TESTS</b>                                    |   |  |
| 5.14.2 External inspection                           | Check for finish, marking and overall dimensions  | Legible marking and finish as specified<br>Dimensions: see specific drawing          |
| 5.14.0 Initial measurements                          | Capacitance at 1 kHz<br>tan δ at 10 kHz   |  |
| 5.14.1.1.4 Robustness of terminations IEC 60068-2-21 | Tensile U <sub>a1</sub><br>Wire diameter    Section    Load<br>≤ 0.8 mm        ≤ 0.5 mm <sup>2</sup> 10 N<br>≤ 1.25 mm       ≤ 1.2 mm <sup>2</sup> 20 N<br>Duration 10 s ± 1 s<br><br>Bending U <sub>b</sub> method 1<br>Wire diameter    Section    Load<br>≤ 0.8 mm        ≤ 0.05 mm <sup>3</sup> 10 N<br>≤ 1.25 mm       ≤ 0.019 mm <sup>3</sup> 20 N<br>4 x 90 °,<br>Duration 2 s to 3 s/bend |  |
| 5.14.1.6 Resistance to soldering heat IEC 60068-2-20 | No predrying, method 1A<br>Solder bath: 280 °C<br>Duration 10 s ± 1 s   |  |
| 5.14.4 Final measurements                            | Capacitance<br>tan δ  | ΔC/C  ≤ 0.5 %<br>Increase of tan δ ≤ 0.0050<br>Compared to values measured in 5.14.0 |
| 5.14.0 Initial measurements                          | Capacitance at 1 kHz<br>tan δ at 10 kHz   |  |
| 5.14.3.1 Vibration IEC 60068-2-6                     | 10 Hz to 55 Hz: Amplitude ± 0.35 mm or acceleration 98 m/s <sup>2</sup><br><br>Test duration: 10 frequency cycles, 3 axes offset from each other by 90°<br>1 octave/min<br>Visual examination   | No visible damage  |



| SUB-CLAUSe NUMBER AND TEST                              | CONDITIONS  | PERFORMANCE REQUIREMENTS  |
|---|---|---|
| <b>TYPE TESTS</b>                                       |   |   |
| 5.14.3.2 Shock or impact<br>IEC 60068-2-6               | Pulse shape: half sine<br>Acceleration: 490 m/s <sup>2</sup><br>Duration of pulse: 11 ms<br>Visual examination  | No visible damage   |
| 5.14.4 Final measurements                               | Capacitance<br>tan δ  | $ \Delta C/C  \leq 0.5 \%$<br>Increase of tan δ ≤ 0.0050<br>Compared to values measured in 5.14.0           |
| 5.5.3.1 Initial measurements                            | Capacitance at 1 kHz<br>tan δ at 10 kHz<br>R insulation   | $ \Delta C/C  \leq 0.5 \%$<br>Increase of tan δ ≤ 0.0050<br>R insulation ≥ 50 % of specified values         |
| 5.5.3.2 DC voltage test between terminal                | 1.5 x U <sub>NDC</sub> at T <sub>amb</sub><br>Duration 60 s   |   |
| 5.5.3.3 Final measurements                              | Capacitance<br>tan δ<br>R insulation  |   |
| 5.9.1 Initial measurements                              | Capacitance at 1 kHz<br>tan δ at 10 kHz   | $ \Delta C/C  \leq 1.0 \%$<br>tan δ ≤ 1.2 initial tan δ + 0.0001<br>Compared to values measured in 5.9.1    |
| 5.9.2 Surge discharge test                              | 1.1 x U <sub>NDC</sub><br>Number of discharges: 5<br>Time lapse: every 2 min (10 min total)   |   |
| 5.9.3 DC voltage test between terminal                  | Within 5 min after the surge discharge test<br>Duration 10 s<br>1.5 x U <sub>NDC</sub> at T <sub>amb</sub>  |   |
| 5.9.3 Final measurements                                | Capacitance<br>tan δ at 10 kHz  |   |
| 5.11.1 Initial measurements                             | Capacitance at 1 kHz<br>tan δ at 10 kHz   | $ \Delta C/C  \leq 0.5 \%$<br>tan δ ≤ 1.2 x initial tan δ + 0.0001<br>Compared to values measured in 5.11.1 |
| 5.11.2 Self healing test                                | 1.5 x U <sub>NDC</sub><br>Duration 10 s<br>Number of clearings ≤ 5<br>Clearing = voltage drop of 5 %<br>Increase the voltage at 100 V/s till 5 clearings occur<br>with a max. of 2.5 x U <sub>NDC</sub><br>for a duration of 10 s |   |
| 5.11.3 Final measurements                               | Capacitance<br>tan δ  |   |
| 5.13.0 Initial measurements                             | Capacitance at 1 kHz<br>tan δ at 10 kHz   |   |
| 5.13.1 Change of temperature acc. to<br>IEC 60068-2-14  | Test Nb<br>T <sub>max.</sub> = 85 °C<br>T <sub>min.</sub> = -40 °C<br>Transition time: 1 h, equivalent to 1 °C/min<br>5 cycles  |   |
| 5.13.2 Damp heat steady state<br>acc. to IEC 60068-2-78 | Test Ca<br>T = 40 °C ± 2 °C<br>RH = 93 % ± 3 %<br>Duration 56 days  |   |
| 5.5.3.2 DC voltage test between terminal                | 1.5 x U <sub>NDC</sub> at ambient temperature<br>Duration 10 s  |   |



| SUB-CLAUSe NUMBER AND TEST                                 | CONDITIONS  | PERFORMANCE REQUIREMENTS  |
|--|---|---|
| <b>TYPE TESTS</b>  |   |   |
| 5.13.3 Final measurements                                  | Visual examination<br><br>Capacitance<br>tan $\delta$ at 10 kHz   | No puncturing or flashover<br>Self healing punctures are permitted<br><br>$ \Delta C/C  \leq 2.0 \%$<br>Increase of tan $\delta \leq 0.0150$<br>Compared to values measured in 5.13.0 |
| 5.10.0 Initial measurements                                | Capacitance at 1 kHz<br>tan $\delta$ at 10 kHz  | Temperature rise $< 1^\circ\text{C}$<br>$ \Delta C/C  \leq 2 \%$<br>Increase of tan $\delta \leq 1.2 \times \text{initial } \delta + 0.0150$  |
| 5.10.1 Thermal stability test under overload conditions    | Natural cooling $T_{\text{amb}} \pm 5^\circ\text{C}$<br>$1.21 \times P_{\text{max.}} = (U_2/2) \times W_2 \times C \times \tan \delta =$<br>$121 \times (I_{\text{max.}}^2 / W_2 \times C) \times \tan \delta_2$ with<br>$W_2 = 2 \times \pi \times f_2$<br>for $I_{\text{max.}}$ (see specific reference data)<br>$f_2 = 10 \text{ kHz}$<br>Duration 48 h                                  |   |
| 5.10.2 Final measurements                                  | Measure the temperature every 1.5 h during the last 6 h<br>Capacitance<br>tan $\delta$ at 10 kHz  |   |
| 5.12 Resonance frequency measurement                       | Impedance analyser at $T_{\text{amb}}$  | $< 0.9$ times the value as specified in typical curve "Resonant frequency" of this specification  |
| 5.15.0 Initial measurements                                | Capacitance at 1 kHz<br>tan $\delta$ at 10 kHz  | $ \Delta C/C  \leq 3 \%$<br>Increase of tan $\delta \leq 0.0150$<br>Compared to values measured in 5.15.0   |
| 5.15.1 Endurance test between terminals                    | Sequence<br>$1.25 \times U_N$ at $T_{\text{max.}} = 85^\circ\text{C}$<br>$1.0 \times U_N$ at $T_{\text{max.}} = 105^\circ\text{C}$<br>Duration 500 h<br>$1000 \times$ discharge at $1.4 \times \hat{i}$ (maximum repetitive peak current in continuous operation)<br>$1.25 \times U_N$ at $T_{\text{max.}} = 85^\circ\text{C}$<br>$1.0 \times U_N$ at $T_{\text{max.}} = 105^\circ\text{C}$ |   |
| 5.15.2 Final measurements                                  | Duration 500 h<br><br>Capacitance<br>tan $\delta$   |   |
| 5.16.3.0 Initial measurements                              | Capacitance at 1 kHz  | No burning of the cheese cloth.<br>The dielectric must withstand the test sequence conducted.   |
| 5.16.3.1 Destruction test sequence<br>High DC voltage test | The capacitors must be put in an oven at $T_{\text{max.}} = 105^\circ\text{C}/2 \text{ h}$ and cooled down<br>Product enveloped with cheese cloth   |   |
| High DC voltage test<br>(limited to 200 mA)                | $3 \times U_{\text{NDC}}$ with minimum 2000 $V_{\text{DC}}$<br>Duration 1 min<br><br>Discharge the capacitor<br>Duration 1 min<br>$AC_{\text{RMS}} \text{ voltage} = U_{\text{NDC}}/2 \times \sqrt{2}$<br>Duration = 15 s   |   |
| High AC voltage test                                       | The above sequence shall be repeated until the test sample capacitance loss 5 % of its initial measurement in 5.16.3-0.   |   |
| 5.16.3.2 Final measurements                                | Visual examination  |   |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**